

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: HALO COMMERCIAL

Report Number: P584415

Luminaire Tested: **HC835D010-HM82555835-81WDC**

Issue Date: 10/21/2021

Test Information

Test Method: LM-41-14
Report Number: P584415
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2109-368-7)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 10/21/2021
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: HALO COMMERCIAL
Catalog Number: HC835D010-HM82555835-81WDC
Description: HALO COMMERCIAL 8" ROUND, NEW CONSTRUCTION FRAME, WITH 8" WIDE DISTRIBUTION, SPECULAR TRIM
Light Source: (1) HIGH LUMEN LED 80CRI / 3500K CCT
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 4643.3 lumens
Efficiency: N/A
Efficacy: 137.8 lumens/watt
Spacing Criteria (0/90/45): 1.1 / 1.1 / 1.05
Luminous Opening: Circular (Dia: 0.67' x H: 0')
CIE Type: Direct


Input Watts (W): 33.7
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P584415

CATALOG NUMBER: HC835D010-HM82555835-81WDC

Luminous Intensity Polar Plot

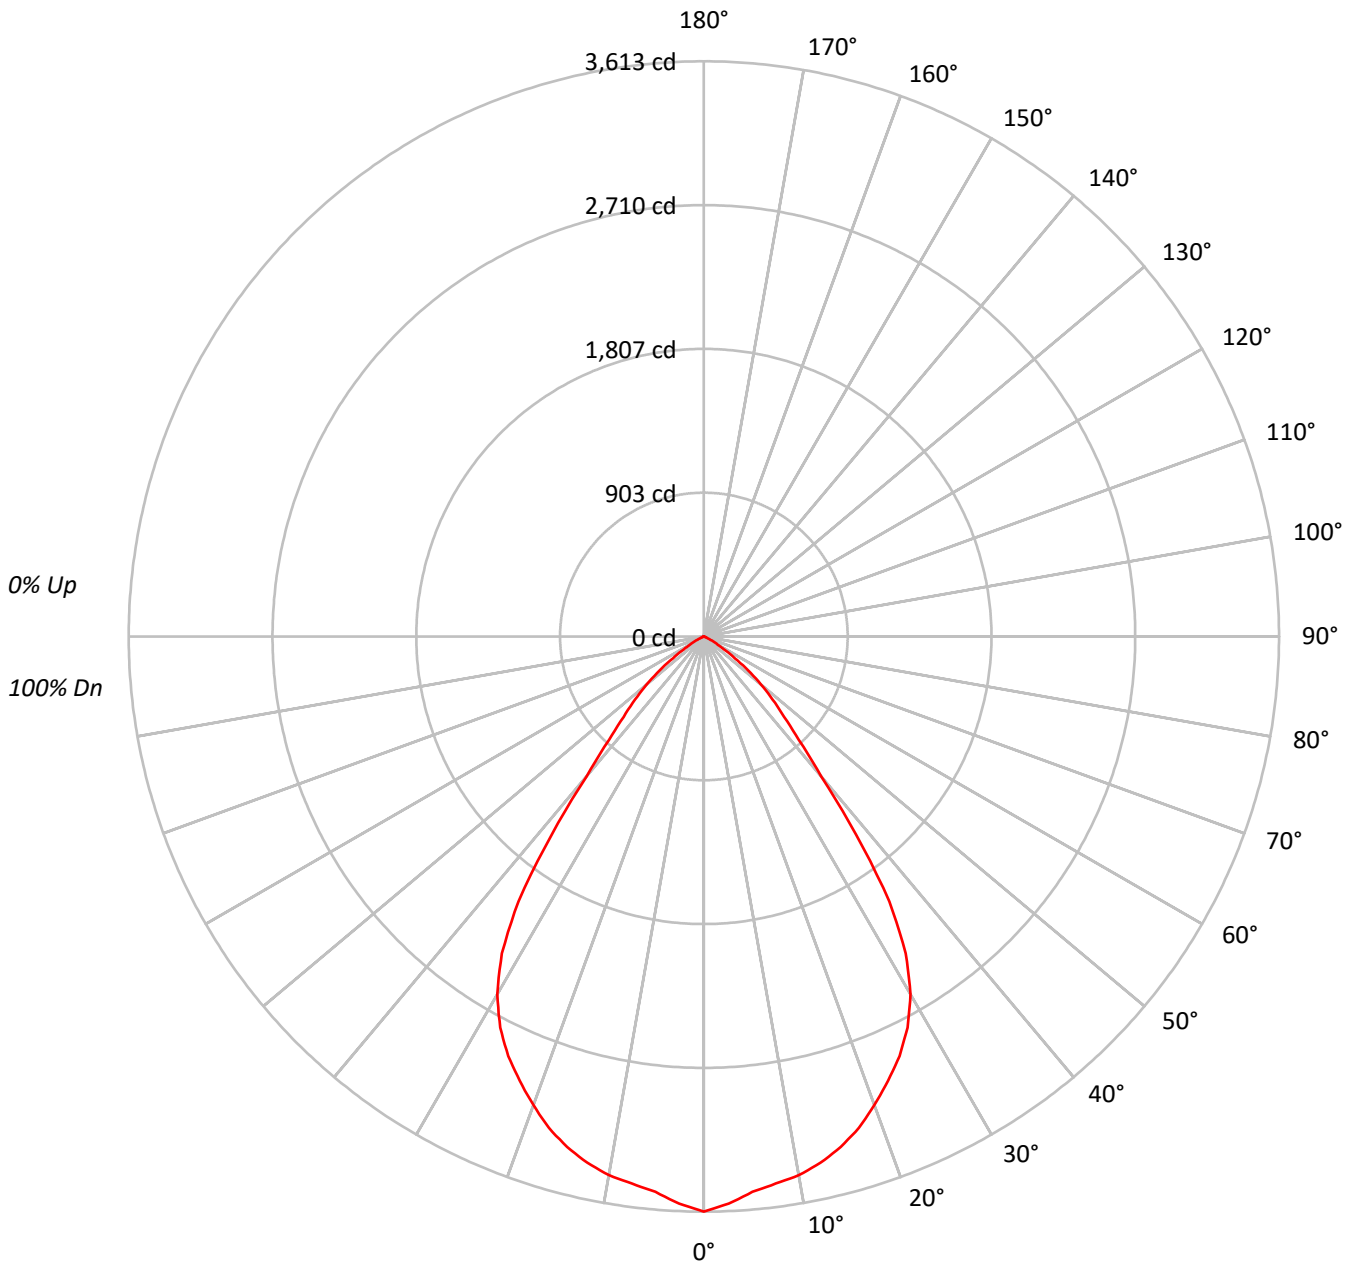



TEST NUMBER: P584415

CATALOG NUMBER: HC835D010-HM82555835-81WDC

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	100	100	100
1	113	110	107	105	110	108	105	103	104	102	100	100	98	97	96	95	94	92	92	92	92
2	106	101	96	93	104	99	95	92	96	92	90	93	90	88	90	88	86	84	84	84	84
3	100	93	87	83	98	91	86	82	89	84	81	86	83	79	84	81	78	77	77	77	77
4	94	86	79	75	92	84	79	74	82	77	73	80	76	72	78	75	71	70	70	70	70
5	88	79	72	68	87	78	72	67	76	71	67	74	70	66	73	69	65	64	64	64	64
6	83	73	66	62	82	72	66	61	71	65	61	69	64	61	68	64	60	59	59	59	59
7	78	68	61	57	77	67	61	56	66	60	56	65	60	56	63	59	55	54	54	54	54
8	74	63	57	52	73	63	56	52	62	56	52	60	55	51	59	55	51	50	50	50	50
9	70	59	53	48	69	59	52	48	58	52	48	57	51	48	56	51	47	46	46	46	46
10	66	55	49	45	65	55	49	45	54	48	44	53	48	44	52	48	44	43	43	43	43

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	111402
5°	108404
10°	107585
15°	105982
20°	102771
25°	98939
30°	92417
35°	76482
40°	46175
45°	31102
50°	22408
55°	12779
60°	5625
65°	2021
70°	748
75°	334
80°	0
85°	0



TEST NUMBER: P584415

CATALOG NUMBER: HC835D010-HM82555835-81WDC

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	332.7	7.2
10°-20°	933.0	20.1
20°-30°	1330.9	28.7
30°-40°	1211.9	26.1
40°-50°	571.7	12.3
50°-60°	224.8	4.8
60°-70°	35.8	0.8
70°-80°	2.6	0.1
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	2596.6	55.9
0°-40°	3808.5	82.0
0°-60°	4604.9	99.2
0°-90°	4643.3	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	4643.3	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	3613	
5°	3502	333
15°	3320	933
25°	2908	1331
35°	2032	1212
45°	713	572
55°	238	225
65°	28	36
75°	3	3
85°	0	0
90°	0	



TEST NUMBER: P584415

CATALOG NUMBER: HC835D010-HM82555835-81WDC

CANDELA DISTRIBUTION (FULL):

	0°
0°	3612.7
2.5°	3565.7
5°	3502.1
7.5°	3466.2
10°	3435.9
12.5°	3386.0
15°	3319.8
17.5°	3236.8
20°	3131.8
22.5°	3021.2
25°	2907.9
27.5°	2769.7
30°	2595.5
32.5°	2360.5
35°	2031.7
37.5°	1570.0
40°	1147.1
42.5°	881.7
45°	713.2
47.5°	585.9
50°	467.1
52.5°	351.0
55°	237.7
57.5°	149.3
60°	91.2
62.5°	55.2
65°	27.7
67.5°	13.8
70°	8.3
72.5°	2.8
75°	2.8
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By 670245859 / DESKTOP-HRDQ47P





— 0°-180°







(END OF REPORT)