

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: HALO COMMERCIAL

Report Number: P593710

Luminaire Tested: **HC835D010-HM82555950-81WDC**

Issue Date: 10/21/2021

**Test Information**

Test Method: LM-41-14  
Report Number: P593710  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2109-368-7)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 10/21/2021  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: HALO COMMERCIAL  
Catalog Number: HC835D010-HM82555950-81WDC  
Description: HALO COMMERCIAL 8" ROUND, NEW CONSTRUCTION FRAME, WITH 8" WIDE DISTRIBUTION, SPECULAR TRIM  
Light Source: (1) HIGH LUMEN LED 90CRI / 5000K CCT  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**


Lumens per Lamp: N/A  
Luminaire Lumens: 4786.4 lumens  
Efficiency: N/A  
Efficacy: 142.0 lumens/watt  
Spacing Criteria (0/90/45): 1.1 / 1.1 / 1.05  
Luminous Opening: Circular (Dia: 0.67' x H: 0')  
CIE Type: Direct

Input Watts (W): 33.7  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P593710  
CATALOG NUMBER: HC835D010-HM82555950-81WDC

### Luminous Intensity Polar Plot

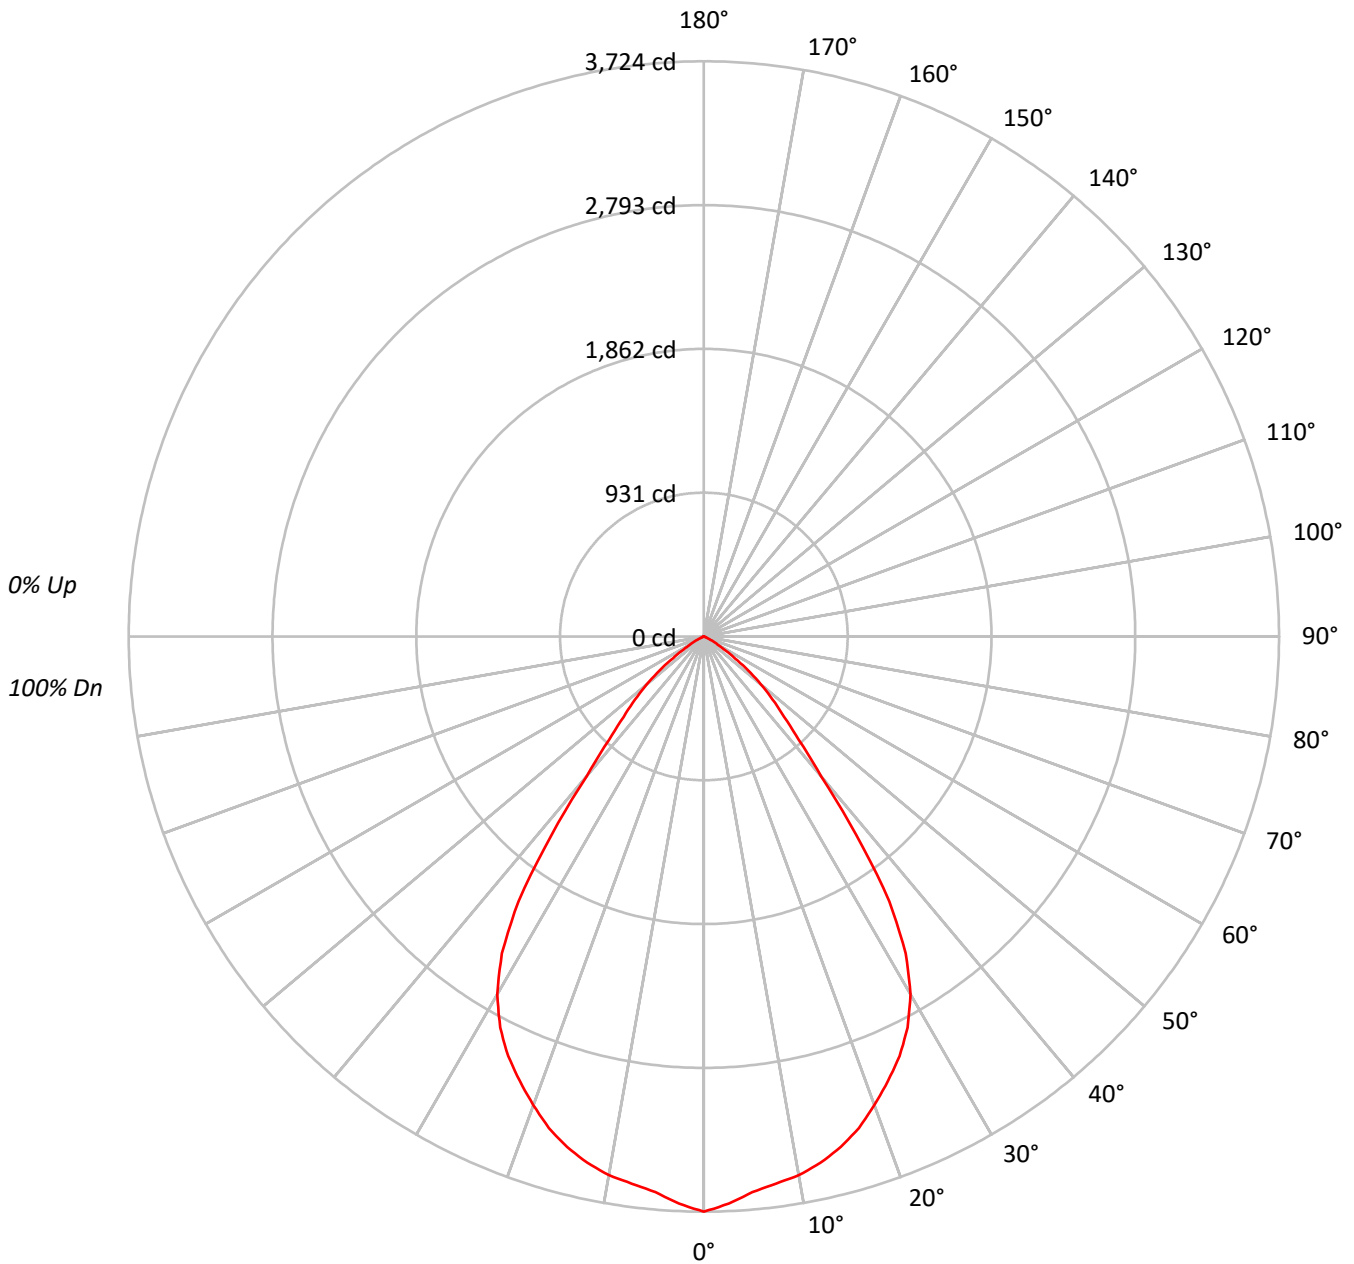



TEST NUMBER: P593710

CATALOG NUMBER: HC835D010-HM82555950-81WDC

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	100	100	100
1	113	110	107	105	110	108	105	103	104	102	100	100	98	97	96	95	94	92	92	92	92
2	106	101	96	93	104	99	95	92	96	92	90	93	90	88	90	88	86	84	84	84	84
3	100	93	87	83	98	91	86	82	89	84	81	86	83	79	84	81	78	77	77	77	77
4	94	86	79	75	92	84	79	74	82	77	73	80	76	72	78	75	71	70	70	70	70
5	88	79	72	68	87	78	72	67	76	71	67	74	70	66	73	69	65	64	64	64	64
6	83	73	66	62	82	72	66	61	71	65	61	69	64	61	68	64	60	59	59	59	59
7	78	68	61	57	77	67	61	56	66	60	56	65	60	56	63	59	55	54	54	54	54
8	74	63	57	52	73	63	56	52	62	56	52	60	55	51	59	55	51	50	50	50	50
9	70	59	53	48	69	59	52	48	58	52	48	57	51	48	56	51	47	46	46	46	46
10	66	55	49	45	65	55	49	45	54	48	44	53	48	44	52	48	44	43	43	43	43

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	114834
5°	111747
10°	110895
15°	109244
20°	105938
25°	101984
30°	95266
35°	78834
40°	47596
45°	32057
50°	23099
55°	13172
60°	5797
65°	2080
70°	766
75°	346
80°	0
85°	0



TEST NUMBER: P593710

CATALOG NUMBER: HC835D010-HM82555950-81WDC

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	343.0	7.2
10°-20°	961.7	20.1
20°-30°	1371.9	28.7
30°-40°	1249.2	26.1
40°-50°	589.3	12.3
50°-60°	231.7	4.8
60°-70°	36.9	0.8
70°-80°	2.6	0.1
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	2676.6	55.9
0°-40°	3925.8	82.0
0°-60°	4746.8	99.2
0°-90°	4786.4	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	4786.4	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	3724	
5°	3610	343
15°	3422	962
25°	2997	1372
35°	2094	1249
45°	735	589
55°	245	232
65°	28	37
75°	3	3
85°	0	0
90°	0	



TEST NUMBER: P593710

CATALOG NUMBER: HC835D010-HM82555950-81WDC

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	3724.0
2.5°	3675.6
5°	3610.1
7.5°	3573.0
10°	3541.6
12.5°	3490.4
15°	3422.0
17.5°	3336.5
20°	3228.3
22.5°	3114.3
25°	2997.4
27.5°	2855.0
30°	2675.5
32.5°	2433.3
35°	2094.2
37.5°	1618.4
40°	1182.4
42.5°	908.9
45°	735.1
47.5°	604.0
50°	481.5
52.5°	361.9
55°	245.0
57.5°	153.8
60°	94.0
62.5°	57.0
65°	28.5
67.5°	14.3
70°	8.5
72.5°	2.9
75°	2.9
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By 670245859 / DESKTOP-HRDQ47P







— 0°-180°







(END OF REPORT)