

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: HALO COMMERCIAL

Report Number: P584576

Luminaire Tested: **HC840D010-HM82555927-81MDH**

Issue Date: 10/21/2021

Test Information

Test Method: LM-41-14
Report Number: P584576
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2109-368-5)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 10/21/2021
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: HALO COMMERCIAL
Catalog Number: HC840D010-HM82555927-81MDH
Description: HALO COMMERCIAL 8" ROUND, NEW CONSTRUCTION FRAME, WITH 8" MEDIUM DISTRIBUTION, HAZE TRIM
Light Source: (1) HIGH LUMEN LED 90CRI / 2700K CCT
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 3684.3 lumens
Efficiency: N/A
Efficacy: 89.9 lumens/watt
Spacing Criteria (0/90/45): 0.68 / 0.68 / 0.81
Luminous Opening: Circular (Dia: 0.67' x H: 0')
CIE Type: Direct


Input Watts (W): 41
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P584576

CATALOG NUMBER: HC840D010-HM82555927-81MDH

Luminous Intensity Polar Plot

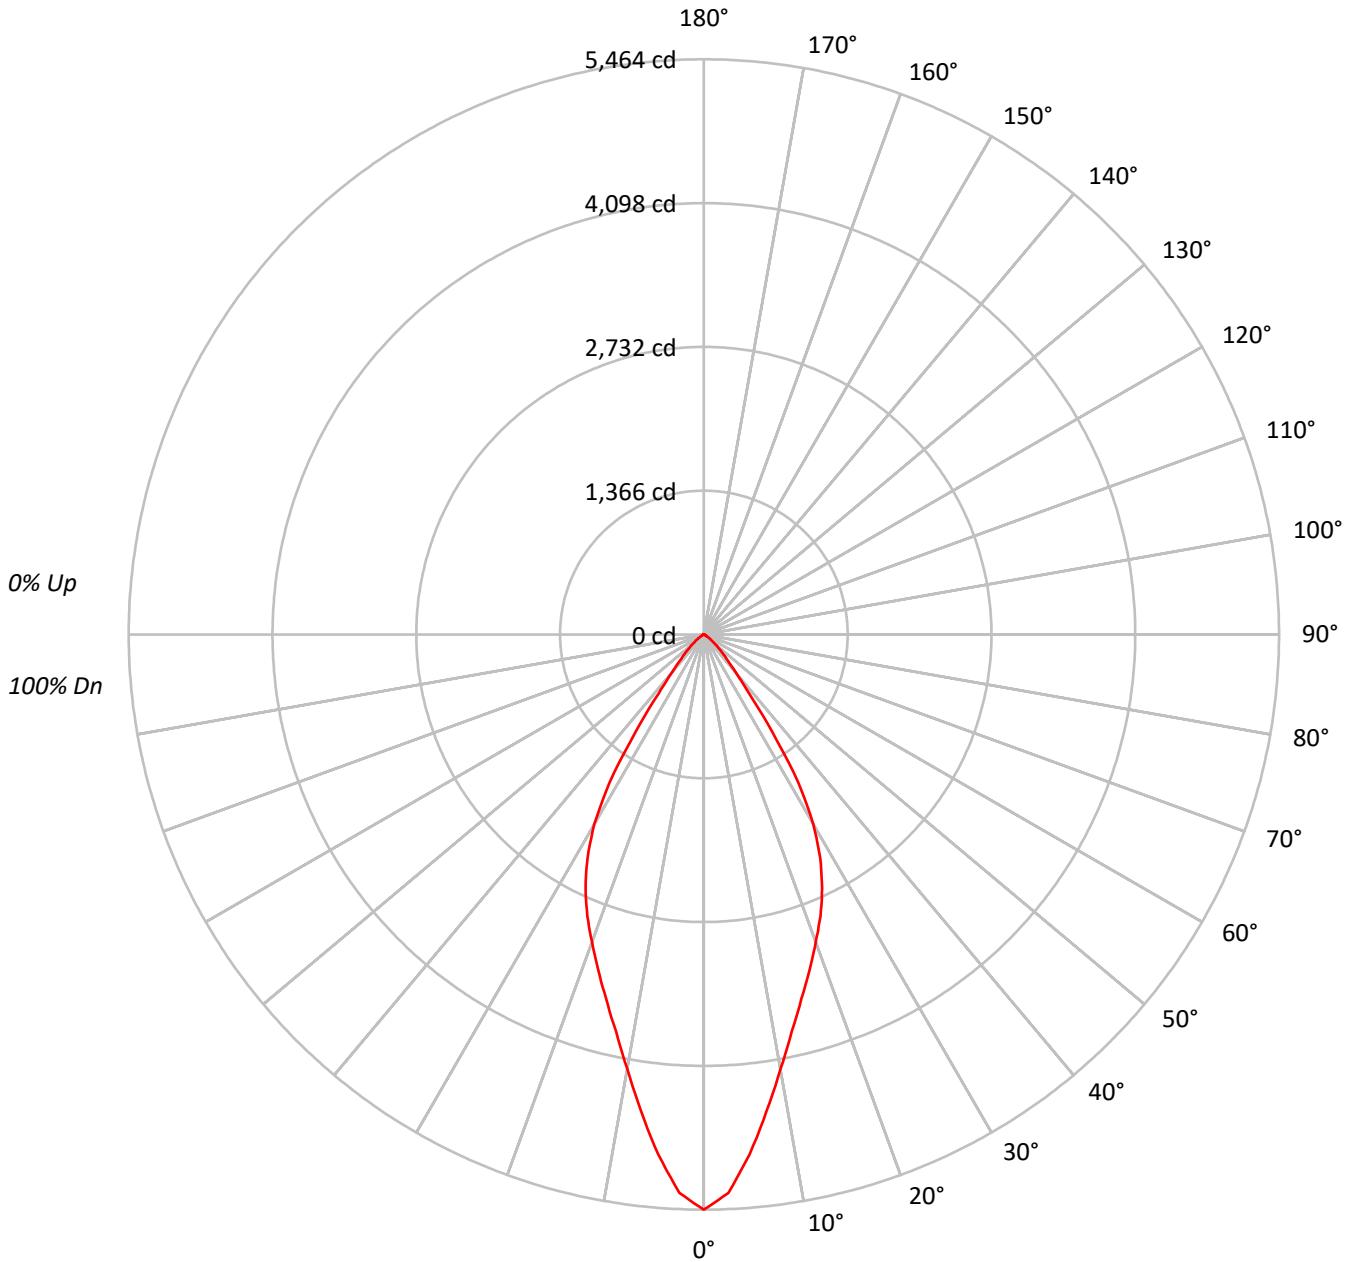



TEST NUMBER: P584576

CATALOG NUMBER: HC840D010-HM82555927-81MDH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			
1	114	111	108	106	111	109	106	104	105	103	101	101	99	98	97	96	95	94			
2	108	103	99	96	106	101	98	95	98	95	93	95	93	91	92	90	89	87			
3	103	96	91	87	101	95	90	87	92	88	85	90	87	84	88	85	83	81			
4	97	90	85	80	96	89	84	80	87	82	79	85	81	78	83	80	77	76			
5	93	84	79	74	91	83	78	74	82	77	73	80	76	73	78	75	72	71			
6	88	79	73	69	87	78	73	69	77	72	68	76	71	68	74	70	67	66			
7	84	75	69	64	82	74	68	64	73	68	64	71	67	64	70	66	63	62			
8	80	70	64	60	79	70	64	60	69	64	60	68	63	60	67	63	60	58			
9	76	67	61	57	75	66	61	57	65	60	56	64	60	56	63	59	56	55			
10	73	63	57	54	72	63	57	53	62	57	53	61	56	53	60	56	53	52			

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	168490
5°	153542
10°	131185
15°	114406
20°	101967
25°	90453
30°	74058
35°	42527
40°	18875
45°	10985
50°	6342
55°	3624
60°	1998
65°	1277
70°	902
75°	596
80°	444
85°	885



TEST NUMBER: P584576

CATALOG NUMBER: HC840D010-HM82555927-81MDH

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	449.0	12.2
10°-20°	1007.3	27.3
20°-30°	1205.8	32.7
30°-40°	729.5	19.8
40°-50°	204.5	5.5
50°-60°	63.5	1.7
60°-70°	18.2	0.5
70°-80°	4.9	0.1
80°-90°	1.7	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	2662.1	72.3
0°-40°	3391.6	92.1
0°-60°	3659.6	99.3
0°-90°	3684.3	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	3684.3	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	5464	
5°	4960	449
15°	3584	1007
25°	2658	1206
35°	1130	729
45°	252	204
55°	67	63
65°	18	18
75°	5	5
85°	2	2
90°	0	



TEST NUMBER: P584576

CATALOG NUMBER: HC840D010-HM82555927-81MDH

CANDELA DISTRIBUTION (FULL):

	0°
0°	5464.0
2.5°	5309.3
5°	4960.3
7.5°	4566.1
10°	4189.6
12.5°	3860.5
15°	3583.7
17.5°	3339.3
20°	3107.3
22.5°	2892.9
25°	2658.5
27.5°	2394.0
30°	2079.9
32.5°	1673.4
35°	1129.7
37.5°	703.3
40°	468.9
42.5°	336.7
45°	251.9
47.5°	184.6
50°	132.2
52.5°	92.2
55°	67.4
57.5°	44.9
60°	32.4
62.5°	22.5
65°	17.5
67.5°	12.5
70°	10.0
72.5°	5.0
75°	5.0
77.5°	2.5
80°	2.5
82.5°	2.5
85°	2.5
87.5°	0.0
90°	0.0



Report Generated By 670245859 / DESKTOP-HRDQ47P





— 0°-180°







(END OF REPORT)