

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: HALO COMMERCIAL

Report Number: P584593

Luminaire Tested: **HC840D010-HM82555930-81MDH**

Issue Date: 10/21/2021

Test Information

Test Method: LM-41-14
Report Number: P584593
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2109-368-5)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 10/21/2021
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: HALO COMMERCIAL
Catalog Number: HC840D010-HM82555930-81MDH
Description: HALO COMMERCIAL 8" ROUND, NEW CONSTRUCTION FRAME, WITH 8" MEDIUM DISTRIBUTION, HAZE TRIM
Light Source: (1) HIGH LUMEN LED 90CRI / 3000K CCT
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 4387.2 lumens
Efficiency: N/A
Efficacy: 107.0 lumens/watt
Spacing Criteria (0/90/45): 0.68 / 0.68 / 0.81
Luminous Opening: Circular (Dia: 0.67' x H: 0')
CIE Type: Direct


Input Watts (W): 41
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P584593

CATALOG NUMBER: HC840D010-HM82555930-81MDH

Luminous Intensity Polar Plot

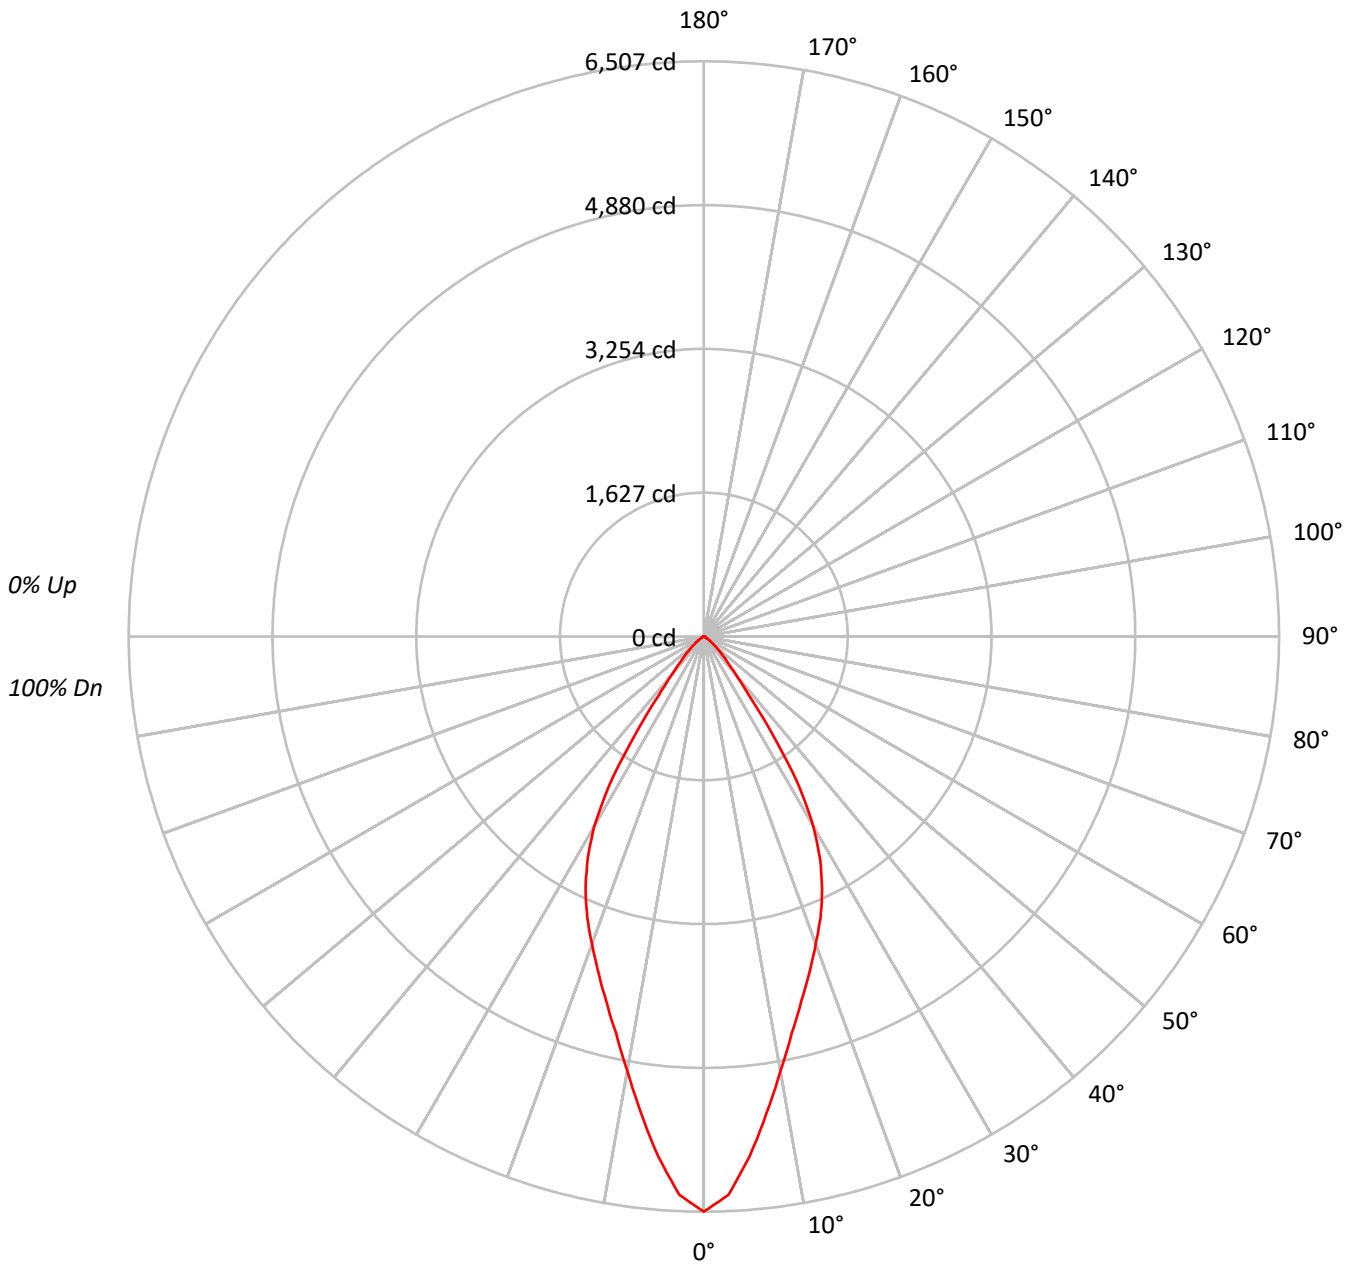



TEST NUMBER: P584593

CATALOG NUMBER: HC840D010-HM82555930-81MDH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	114	111	108	106	111	109	106	104	105	103	101	101	99	98	97	96	95	94
2	108	103	99	96	106	101	98	95	98	95	93	95	93	91	92	90	89	87
3	103	96	91	87	101	95	90	87	92	88	85	90	87	84	88	85	83	81
4	97	90	85	80	96	89	84	80	87	82	79	85	81	78	83	80	77	76
5	93	84	79	74	91	83	78	74	82	77	73	80	76	73	78	75	72	71
6	88	79	73	69	87	78	73	69	77	72	68	76	71	68	74	70	67	66
7	84	75	69	64	82	74	68	64	73	68	64	71	67	64	70	66	63	62
8	80	70	64	60	79	70	64	60	69	64	60	68	63	60	67	63	60	58
9	76	67	61	57	75	66	61	57	65	60	56	64	60	56	63	59	56	55
10	73	63	57	54	72	63	57	53	62	57	53	61	56	53	60	56	53	52

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	200640
5°	182837
10°	156219
15°	136236
20°	121423
25°	107707
30°	88187
35°	50643
40°	22474
45°	13078
50°	7551
55°	4312
60°	2381
65°	1518
70°	1073
75°	703
80°	533
85°	1061



TEST NUMBER: P584593

CATALOG NUMBER: HC840D010-HM82555930-81MDH

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	534.7	12.2
10°-20°	1199.6	27.3
20°-30°	1435.8	32.7
30°-40°	868.6	19.8
40°-50°	243.4	5.5
50°-60°	75.6	1.7
60°-70°	21.6	0.5
70°-80°	5.9	0.1
80°-90°	2.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	3170.1	72.3
0°-40°	4038.7	92.1
0°-60°	4357.7	99.3
0°-90°	4387.2	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	4387.2	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	6507	
5°	5907	535
15°	4268	1200
25°	3166	1436
35°	1345	869
45°	300	243
55°	80	76
65°	21	22
75°	6	6
85°	3	2
90°	0	



TEST NUMBER: P584593

CATALOG NUMBER: HC840D010-HM82555930-81MDH

CANDELA DISTRIBUTION (FULL):

	0°
0°	6506.6
2.5°	6322.5
5°	5906.7
7.5°	5437.5
10°	4989.1
12.5°	4597.1
15°	4267.5
17.5°	3976.4
20°	3700.2
22.5°	3444.8
25°	3165.6
27.5°	2850.9
30°	2476.7
32.5°	1992.7
35°	1345.3
37.5°	837.4
40°	558.3
42.5°	400.9
45°	299.9
47.5°	219.8
50°	157.4
52.5°	109.8
55°	80.2
57.5°	53.4
60°	38.6
62.5°	26.8
65°	20.8
67.5°	14.9
70°	11.9
72.5°	5.9
75°	5.9
77.5°	3.0
80°	3.0
82.5°	3.0
85°	3.0
87.5°	0.0
90°	0.0



Report Generated By 670245859 / DESKTOP-HRDQ47P





— 0°-180°







(END OF REPORT)