

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: HALO COMMERCIAL

Report Number: P584603

Luminaire Tested: **HC840D010-HM82555930-81WDH**

Issue Date: 10/21/2021

Test Information

Test Method: LM-41-14
Report Number: P584603
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2109-368-8)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 10/21/2021
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: HALO COMMERCIAL
Catalog Number: HC840D010-HM82555930-81WDH
Description: HALO COMMERCIAL 8" ROUND, NEW CONSTRUCTION FRAME, WITH 8" WIDE DISTRIBUTION, HAZE TRIM
Light Source: (1) HIGH LUMEN LED 90CRI / 3000K CCT
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 4725.8 lumens
Efficiency: N/A
Efficacy: 115.3 lumens/watt
Spacing Criteria (0/90/45): 1.12 / 1.12 / 1.06
Luminous Opening: Circular (Dia: 0.67' x H: 0')
CIE Type: Direct


Input Watts (W): 41
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P584603

CATALOG NUMBER: HC840D010-HM82555930-81WDH

Luminous Intensity Polar Plot

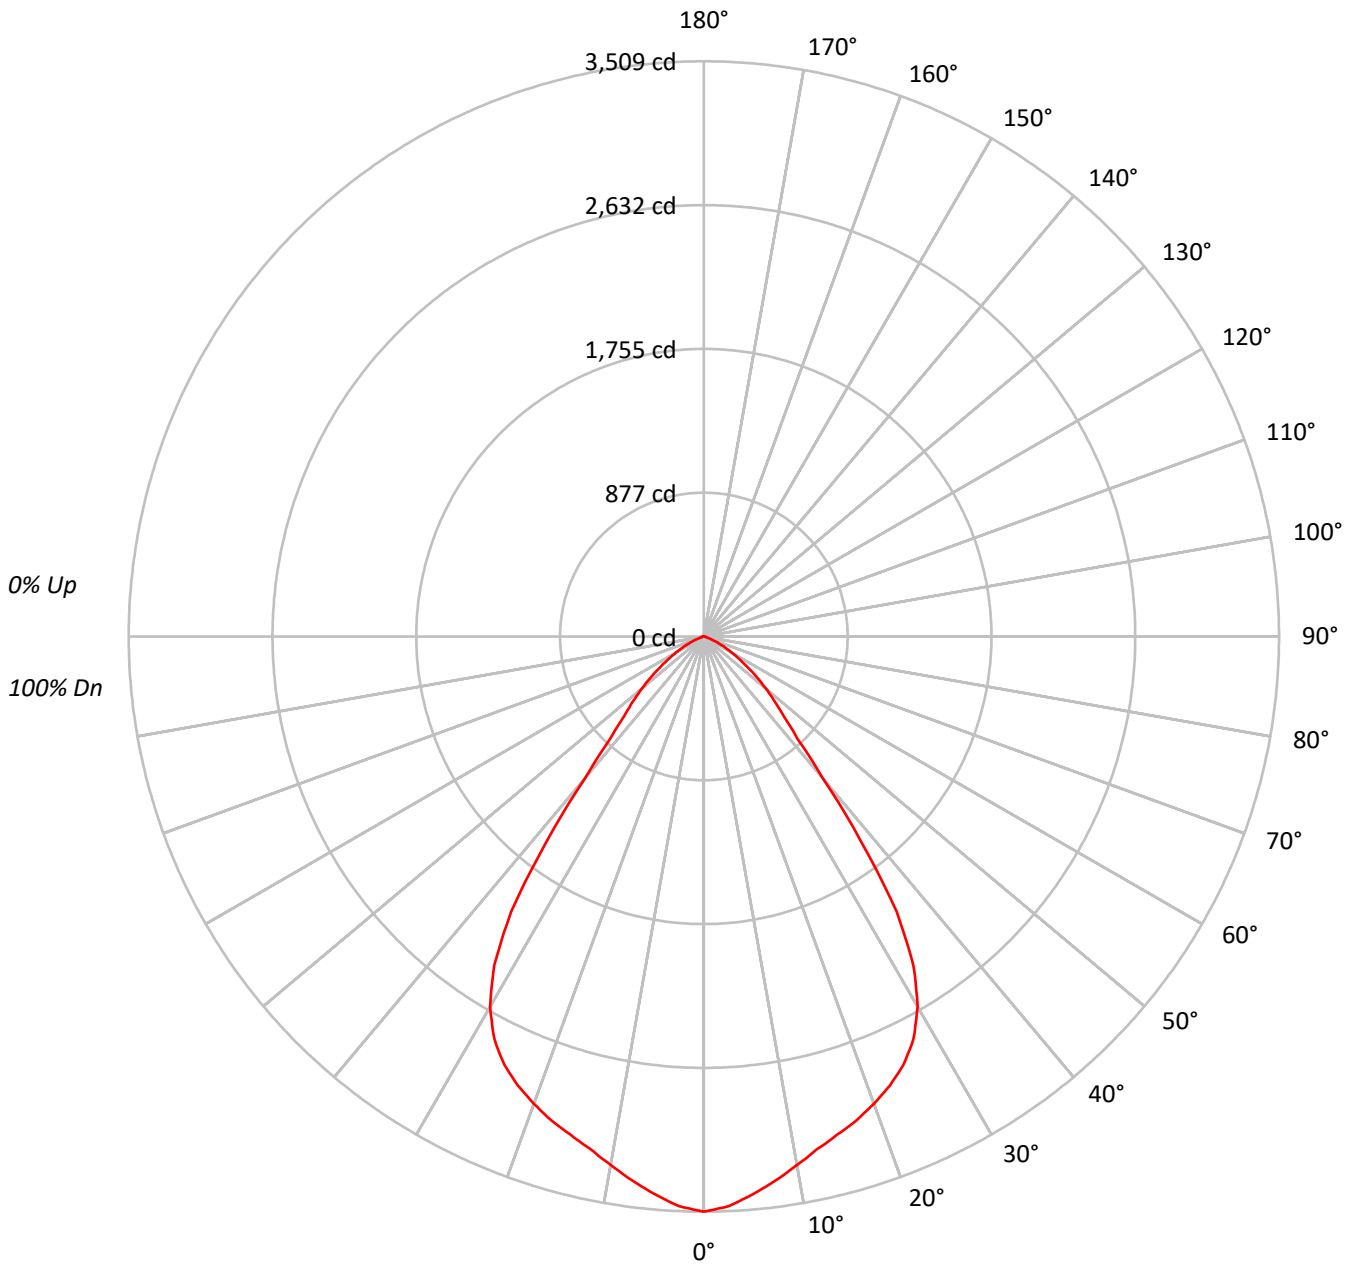



TEST NUMBER: P584603

CATALOG NUMBER: HC840D010-HM82555930-81WDH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			
1	113	109	107	104	110	107	105	102	103	101	99	99	98	96	96	95	93	92			
2	106	100	95	91	103	98	94	90	95	91	88	92	89	86	89	87	85	83			
3	99	92	86	81	97	90	85	81	88	83	79	85	81	78	83	80	77	75			
4	93	84	78	73	91	83	77	72	81	76	72	79	74	71	77	73	70	68			
5	87	78	71	66	86	77	70	66	75	69	65	73	68	64	71	67	64	62			
6	82	72	65	60	80	71	64	60	69	64	59	68	63	59	66	62	58	57			
7	77	67	60	55	76	66	59	55	64	59	54	63	58	54	62	57	54	52			
8	73	62	55	50	71	61	55	50	60	54	50	59	54	50	58	53	49	48			
9	69	58	51	46	67	57	51	46	56	50	46	55	50	46	54	49	46	44			
10	65	54	47	43	64	53	47	43	53	47	43	52	46	43	51	46	42	41			

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	108192
5°	105755
10°	102512
15°	100436
20°	99539
25°	98047
30°	92880
35°	77167
40°	45447
45°	30055
50°	23655
55°	17408
60°	12094
65°	7369
70°	3219
75°	1418
80°	1048
85°	0



TEST NUMBER: P584603

CATALOG NUMBER: HC840D010-HM82555930-81WDH

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	321.7	6.8
10°-20°	889.5	18.8
20°-30°	1317.8	27.9
30°-40°	1217.7	25.8
40°-50°	561.4	11.9
50°-60°	295.3	6.2
60°-70°	104.4	2.2
70°-80°	16.4	0.3
80°-90°	1.6	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	2529.0	53.5
0°-40°	3746.7	79.3
0°-60°	4603.4	97.4
0°-90°	4725.8	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	4725.8	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	3509	
5°	3416	322
15°	3146	889
25°	2882	1318
35°	2050	1218
45°	689	561
55°	324	295
65°	101	104
75°	12	16
85°	0	2
90°	0	



TEST NUMBER: P584603

CATALOG NUMBER: HC840D010-HM82555930-81WDH

CANDELA DISTRIBUTION (FULL):

0°	
0°	3508.6
2.5°	3478.8
5°	3416.5
7.5°	3348.2
10°	3273.9
12.5°	3202.6
15°	3146.1
17.5°	3095.7
20°	3033.3
22.5°	2964.9
25°	2881.7
27.5°	2768.9
30°	2608.5
32.5°	2379.6
35°	2049.9
37.5°	1574.6
40°	1129.0
42.5°	846.7
45°	689.2
47.5°	585.2
50°	493.1
52.5°	404.0
55°	323.8
57.5°	255.5
60°	196.1
62.5°	148.5
65°	101.0
67.5°	59.4
70°	35.7
72.5°	20.8
75°	11.9
77.5°	8.9
80°	5.9
82.5°	3.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By 670245859 / DESKTOP-HRDQ47P





— 0°-180°







(END OF REPORT)