

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: HALO COMMERCIAL

Report Number: P584677

Luminaire Tested: **HC845D010-HM82555835-81MDC**

Issue Date: 10/21/2021

**Test Information**

Test Method: LM-41-14  
Report Number: P584677  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2109-368-4)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 10/21/2021  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: HALO COMMERCIAL  
Catalog Number: HC845D010-HM82555835-81MDC  
Description: HALO COMMERCIAL 8" ROUND, NEW CONSTRUCTION FRAME, WITH 8" MEDIUM DISTRIBUTION, SPECULAR TRIM  
Light Source: (1) HIGH LUMEN LED 80CRI / 3500K CCT  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 5508.8 lumens  
Efficiency: N/A  
Efficacy: 125.2 lumens/watt  
Spacing Criteria (0/90/45): 0.58 / 0.58 / 0.67  
Luminous Opening: Circular (Dia: 0.67' x H: 0')  
CIE Type: Direct


Input Watts (W): 44  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P584677

CATALOG NUMBER: HC845D010-HM82555835-81MDC

### Luminous Intensity Polar Plot

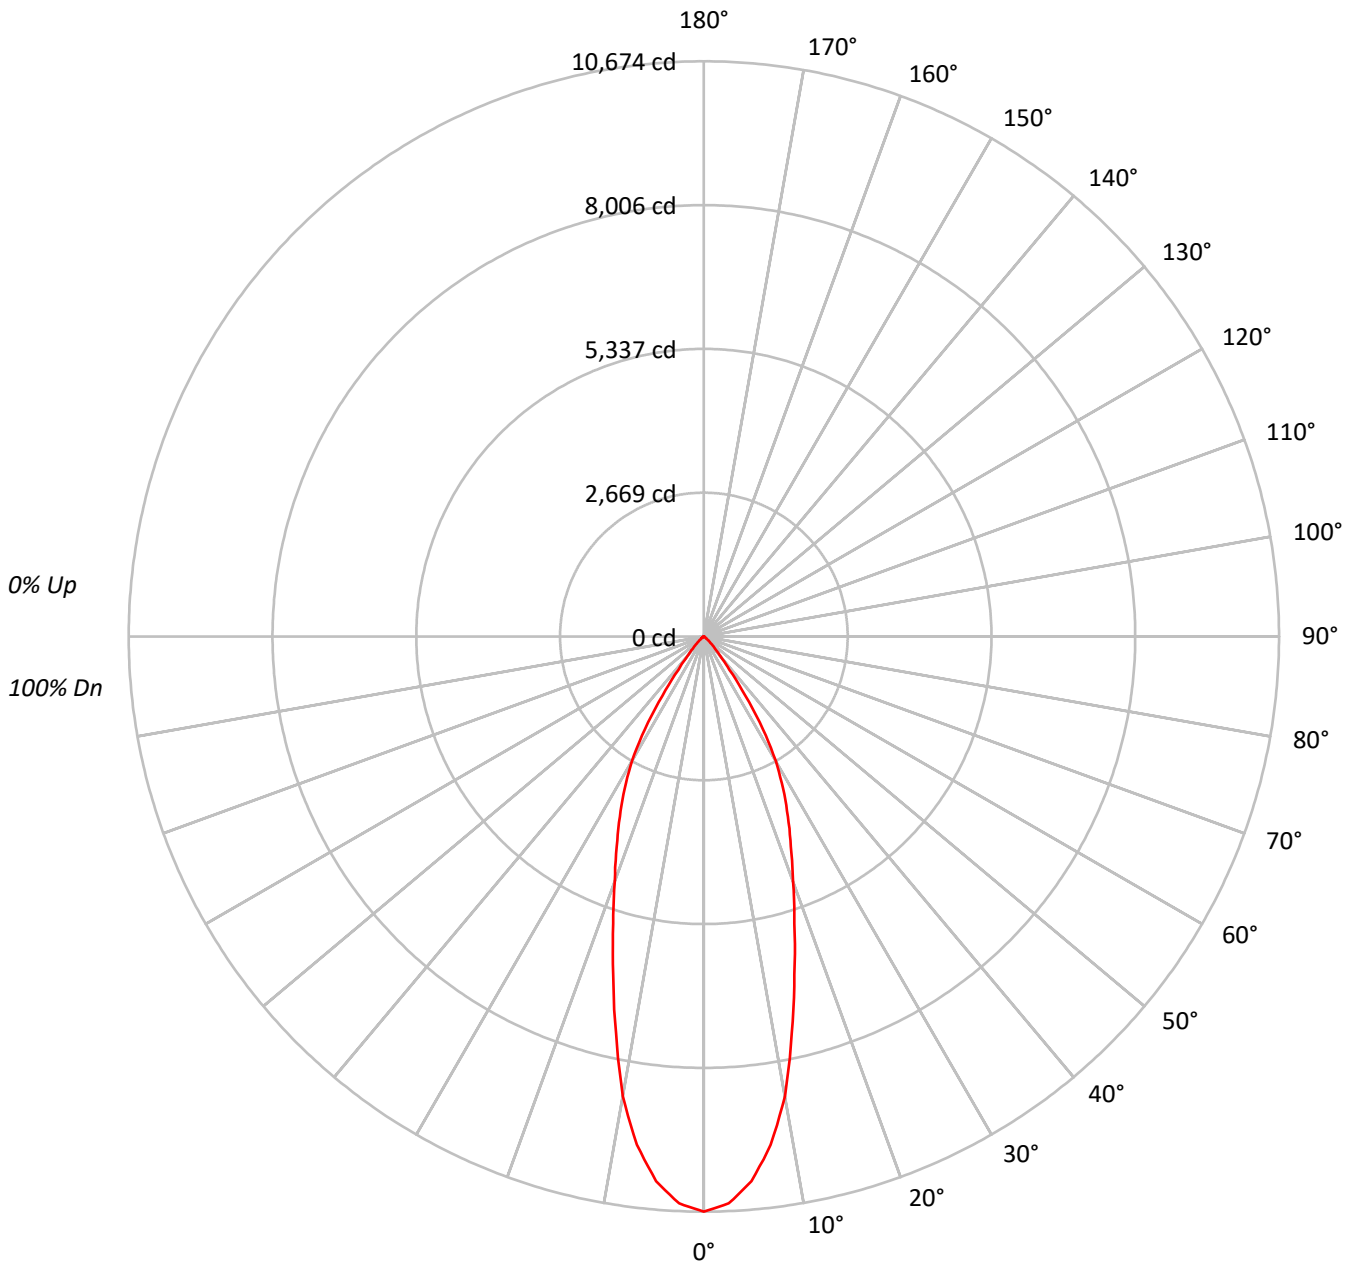



TEST NUMBER: P584677

CATALOG NUMBER: HC845D010-HM82555835-81MDC

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			
1	114	111	109	107	112	109	107	105	105	104	102	102	100	99	98	97	96	95			
2	109	105	101	98	107	103	100	97	100	97	95	97	95	93	94	92	91	89			
3	104	98	94	90	102	97	93	90	94	91	88	92	89	87	90	87	85	84			
4	100	93	88	84	98	92	87	83	90	86	82	88	84	82	86	83	81	79			
5	95	88	82	78	94	87	82	78	85	81	77	83	80	77	82	79	76	75			
6	91	83	78	74	90	82	77	74	81	76	73	79	76	73	78	75	72	71			
7	87	79	73	70	86	78	73	69	77	72	69	76	72	69	75	71	68	67			
8	84	75	70	66	82	74	69	66	73	69	65	72	68	65	71	68	65	64			
9	80	71	66	62	79	71	66	62	70	65	62	69	65	62	68	65	62	61			
10	77	68	63	59	76	68	63	59	67	62	59	66	62	59	65	62	59	58			

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	329141
5°	314042
10°	271134
15°	207325
20°	158633
25°	125501
30°	94803
35°	50436
40°	19213
45°	9219
50°	3929
55°	1650
60°	629
65°	496
70°	307
75°	0
80°	0
85°	0



TEST NUMBER: P584677

CATALOG NUMBER: HC845D010-HM82555835-81MDC

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	921.0	16.7
10°-20°	1813.0	32.9
20°-30°	1688.5	30.7
30°-40°	871.3	15.8
40°-50°	177.5	3.2
50°-60°	30.4	0.6
60°-70°	5.9	0.1
70°-80°	1.3	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	4422.5	80.3
0°-40°	5293.8	96.1
0°-60°	5501.6	99.9
0°-90°	5508.8	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	5508.8	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	10674	
5°	10145	921
15°	6494	1813
25°	3689	1689
35°	1340	871
45°	211	177
55°	31	30
65°	7	6
75°	0	1
85°	0	0
90°	0	



TEST NUMBER: P584677

CATALOG NUMBER: HC845D010-HM82555835-81MDC

**CANDELA DISTRIBUTION (FULL):**

0°	
0°	10673.8
2.5°	10530.6
5°	10145.4
7.5°	9511.4
10°	8659.1
12.5°	7540.9
15°	6494.3
17.5°	5587.5
20°	4834.1
22.5°	4220.5
25°	3688.6
27.5°	3184.1
30°	2662.5
32.5°	2042.1
35°	1339.8
37.5°	777.2
40°	477.3
42.5°	313.7
45°	211.4
47.5°	132.9
50°	81.9
52.5°	47.7
55°	30.7
57.5°	13.6
60°	10.2
62.5°	6.8
65°	6.8
67.5°	3.4
70°	3.4
72.5°	3.4
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By 670245859 / DESKTOP-HRDQ47P







— 0°-180°







(END OF REPORT)