

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: HALO COMMERCIAL

Report Number: P584724

Luminaire Tested: **HC845D010-HM82555927-81WDWB**

Issue Date: 10/21/2021

Test Information

Test Method: LM-41-14
Report Number: P584724
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2109-368-10)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 10/21/2021
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: HALO COMMERCIAL
Catalog Number: HC845D010-HM82555927-81WDWB
Description: HALO COMMERCIAL 8" ROUND, NEW CONSTRUCTION FRAME, WITH 8" WIDE DISTRIBUTION, WHITE BAFFLE TRIM
Light Source: (1) HIGH LUMEN LED 90CRI / 2700K CCT
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 4373.2 lumens
Efficiency: N/A
Efficacy: 99.4 lumens/watt
Spacing Criteria (0/90/45): 1.32 / 1.32 / 1.14
Luminous Opening: Circular (Dia: 0.67' x H: 0')
CIE Type: Direct


Input Watts (W): 44
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P584724

CATALOG NUMBER: HC845D010-HM82555927-81WDWB

Luminous Intensity Polar Plot

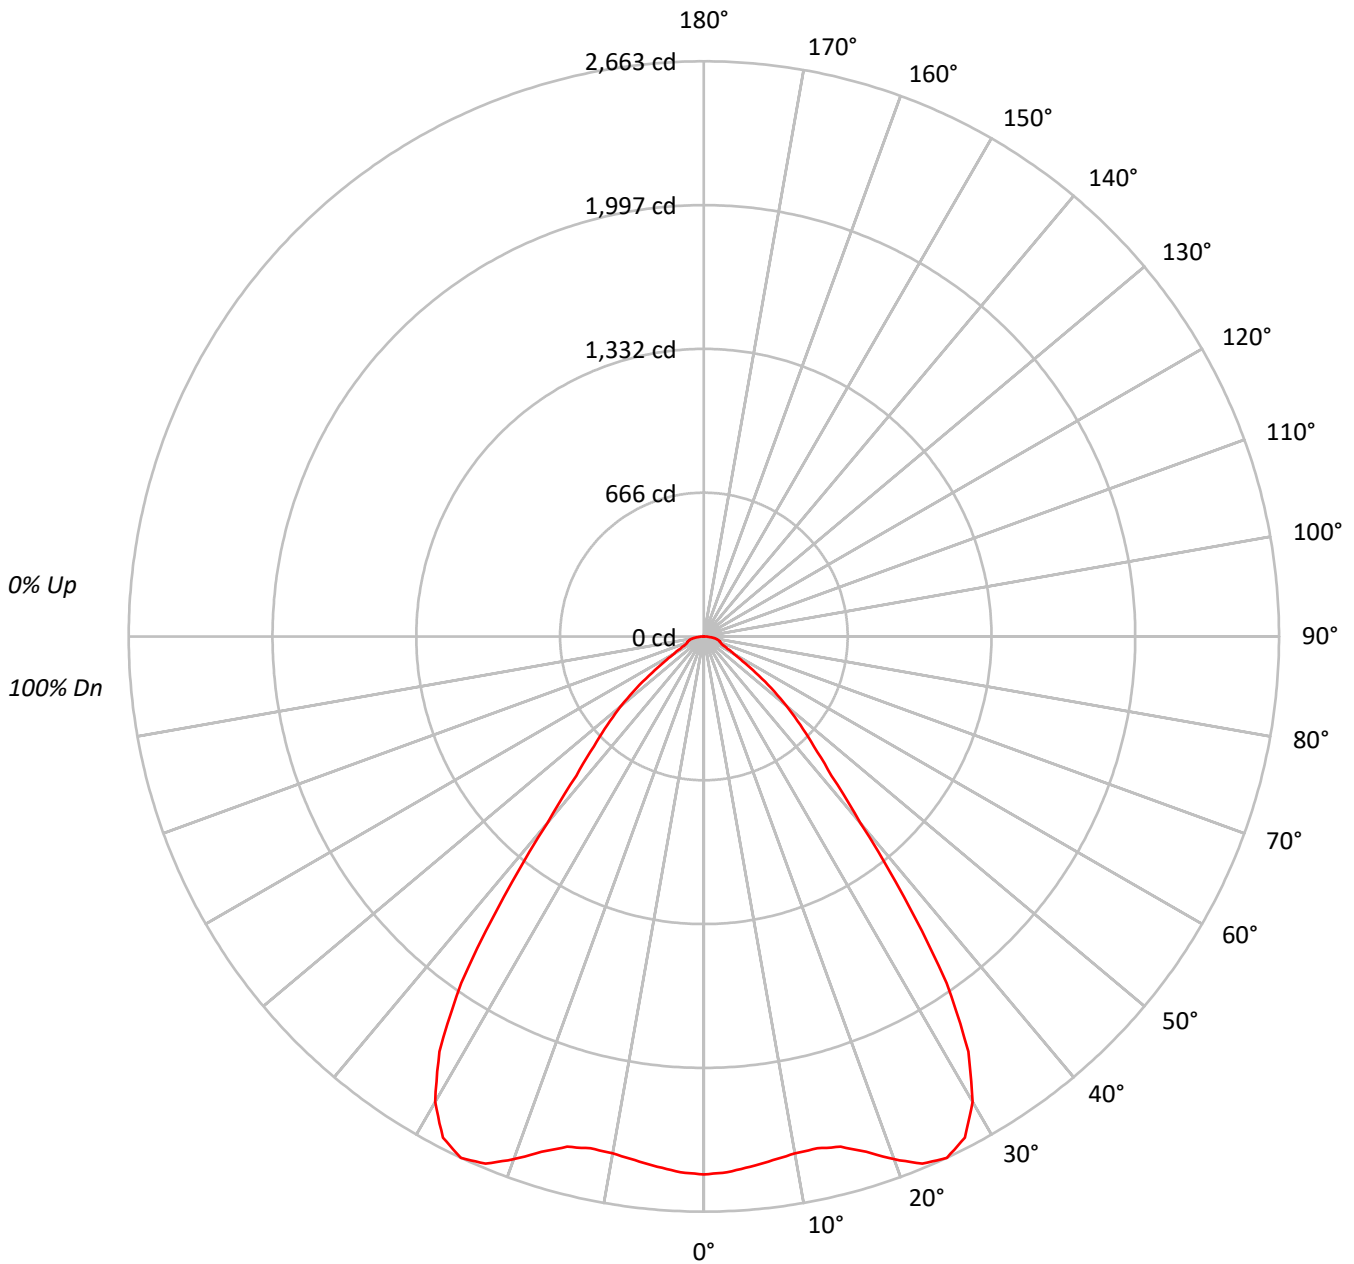



TEST NUMBER: P584724

CATALOG NUMBER: HC845D010-HM82555927-81WDWB

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			
1	112	108	105	103	109	106	103	101	102	100	98	98	97	95	95	93	92	90			
2	105	99	94	89	102	97	92	88	93	90	86	90	87	84	88	85	83	81			
3	98	90	84	79	96	88	83	78	86	81	77	83	79	76	81	77	74	73			
4	92	82	75	70	90	81	75	70	79	73	69	77	72	68	75	71	67	65			
5	86	75	68	63	84	74	68	63	73	67	62	71	66	62	69	65	61	59			
6	80	69	62	57	79	69	62	57	67	61	56	65	60	56	64	59	56	54			
7	75	64	57	52	74	63	57	52	62	56	51	61	55	51	59	55	51	49			
8	71	59	52	47	69	59	52	47	58	51	47	56	51	47	55	50	47	45			
9	67	55	48	43	65	55	48	43	54	47	43	53	47	43	52	47	43	41			
10	63	51	45	40	62	51	44	40	50	44	40	49	44	40	48	43	40	38			

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	76804
5°	76277
10°	76076
15°	78074
20°	84522
25°	90616
30°	88593
35°	73768
40°	45318
45°	31381
50°	23948
55°	15704
60°	9824
65°	7362
70°	7420
75°	8543
80°	9429
85°	8456



TEST NUMBER: P584724

CATALOG NUMBER: HC845D010-HM82555927-81WDWB

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	234.1	5.4
10°-20°	702.0	16.1
20°-30°	1208.6	27.6
30°-40°	1170.9	26.8
40°-50°	576.7	13.2
50°-60°	272.2	6.2
60°-70°	107.2	2.5
70°-80°	73.9	1.7
80°-90°	27.5	0.6
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	2144.8	49.0
0°-40°	3315.7	75.8
0°-60°	4164.6	95.2
0°-90°	4373.2	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	4373.2	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	2491	
5°	2464	234
15°	2446	702
25°	2663	1209
35°	1960	1171
45°	720	577
55°	292	272
65°	101	107
75°	72	74
85°	24	27
90°	0	



TEST NUMBER: P584724

CATALOG NUMBER: HC845D010-HM82555927-81WDWB

CANDELA DISTRIBUTION (FULL):

0°	
0°	2490.7
2.5°	2482.8
5°	2464.2
7.5°	2445.6
10°	2429.6
12.5°	2427.1
15°	2445.6
17.5°	2501.3
20°	2575.7
22.5°	2642.1
25°	2663.3
27.5°	2615.6
30°	2488.1
32.5°	2278.3
35°	1959.6
37.5°	1521.5
40°	1125.8
42.5°	873.7
45°	719.6
47.5°	605.4
50°	499.2
52.5°	393.0
55°	292.1
57.5°	212.4
60°	159.3
62.5°	124.8
65°	100.9
67.5°	87.6
70°	82.3
72.5°	76.9
75°	71.7
77.5°	63.7
80°	53.1
82.5°	39.9
85°	23.9
87.5°	10.7
90°	0.0



Report Generated By 670245859 / DESKTOP-HRDQ47P





— 0°-180°







(END OF REPORT)