

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: HALO COMMERCIAL

Report Number: P584729

Luminaire Tested: **HC845D010-HM82555930-81MDH**

Issue Date: 10/21/2021

Test Information

Test Method: LM-41-14
Report Number: P584729
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2109-368-5)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 10/21/2021
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: HALO COMMERCIAL
Catalog Number: HC845D010-HM82555930-81MDH
Description: HALO COMMERCIAL 8" ROUND, NEW CONSTRUCTION FRAME, WITH 8" MEDIUM DISTRIBUTION, HAZE TRIM
Light Source: (1) HIGH LUMEN LED 90CRI / 3000K CCT
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 4670.2 lumens
Efficiency: N/A
Efficacy: 106.1 lumens/watt
Spacing Criteria (0/90/45): 0.68 / 0.68 / 0.81
Luminous Opening: Circular (Dia: 0.67' x H: 0')
CIE Type: Direct


Input Watts (W): 44
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P584729

CATALOG NUMBER: HC845D010-HM82555930-81MDH

Luminous Intensity Polar Plot

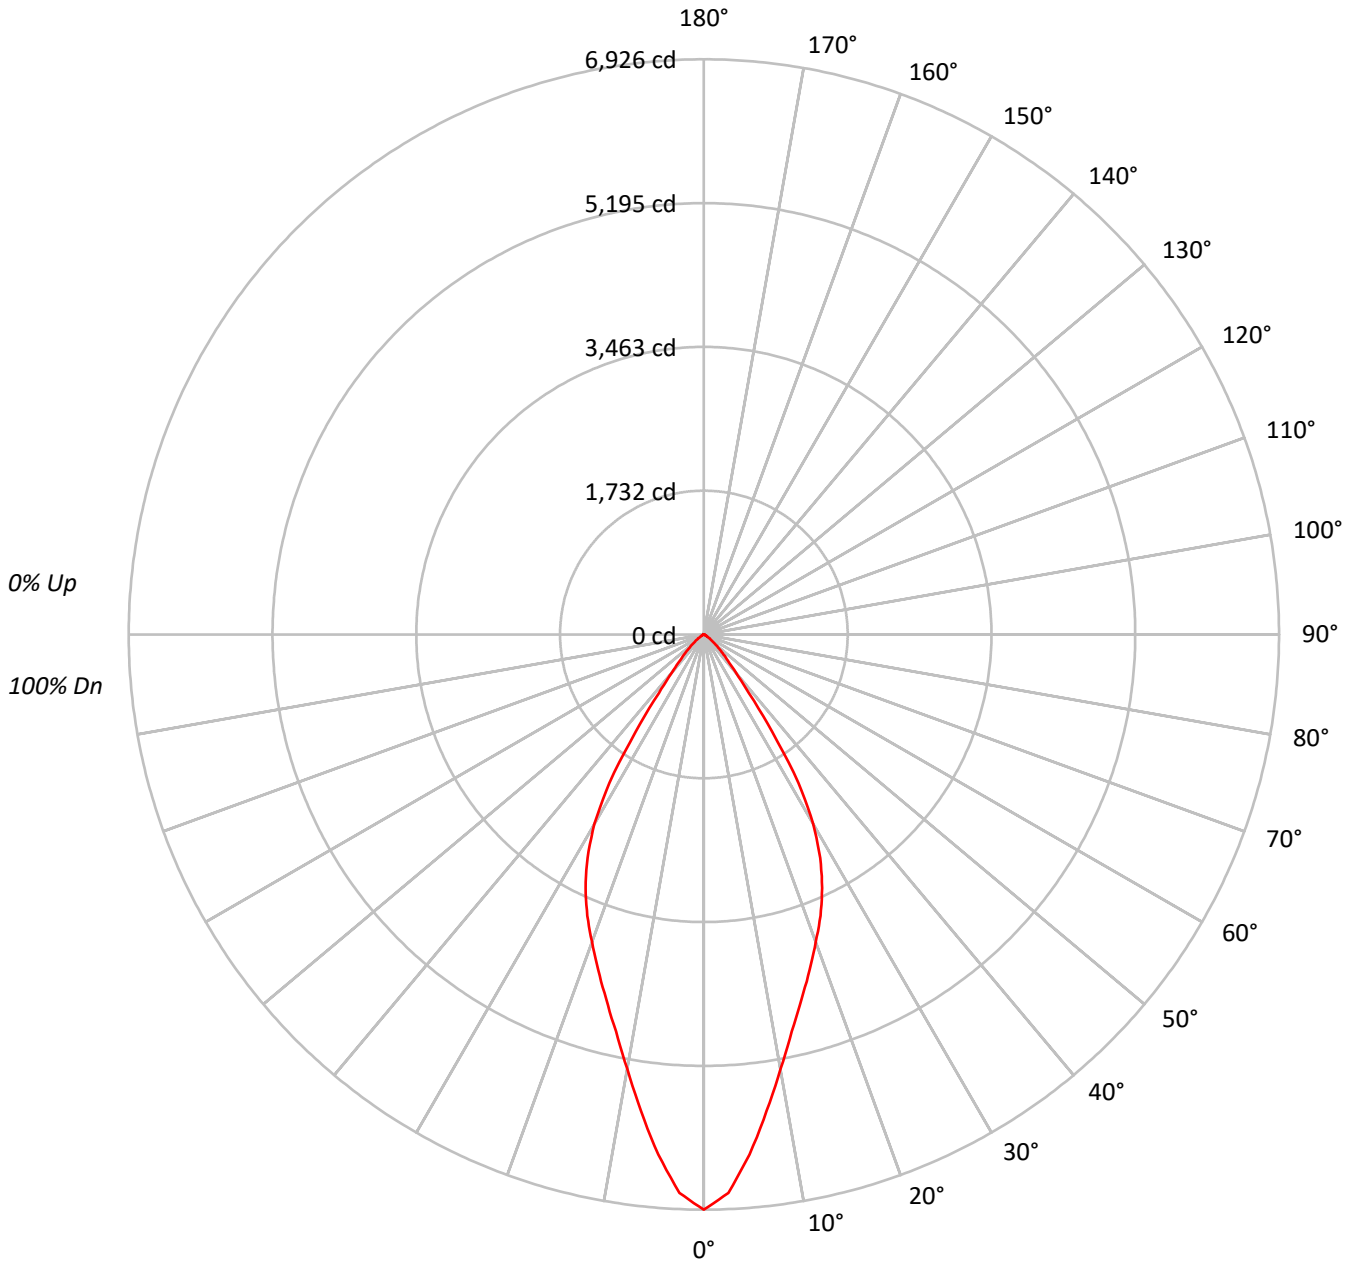



TEST NUMBER: P584729

CATALOG NUMBER: HC845D010-HM82555930-81MDH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			
1	114	111	108	106	111	109	106	104	105	103	101	101	99	98	97	96	95	94			
2	108	103	99	96	106	101	98	95	98	95	93	95	93	91	92	90	89	87			
3	103	96	91	87	101	95	90	87	92	88	85	90	87	84	88	85	83	81			
4	97	90	85	80	96	89	84	80	87	82	79	85	81	78	83	80	77	76			
5	93	84	79	74	91	83	78	74	82	77	73	80	76	73	78	75	72	71			
6	88	79	73	69	87	78	73	69	77	72	68	76	71	68	74	70	67	66			
7	84	75	69	64	82	74	68	64	73	68	64	71	67	64	70	66	63	62			
8	80	70	64	60	79	70	64	60	69	64	60	68	63	60	67	63	60	58			
9	76	67	61	57	75	66	61	57	65	60	56	64	60	56	63	59	56	55			
10	73	63	57	54	72	63	57	53	62	57	53	61	56	53	60	56	53	52			

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	213578
5°	194630
10°	166295
15°	145022
20°	129256
25°	114658
30°	93874
35°	53906
40°	23927
45°	13924
50°	8035
55°	4591
60°	2535
65°	1620
70°	1145
75°	751
80°	568
85°	1132



TEST NUMBER: P584729

CATALOG NUMBER: HC845D010-HM82555930-81MDH

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	569.2	12.2
10°-20°	1276.9	27.3
20°-30°	1528.5	32.7
30°-40°	924.7	19.8
40°-50°	259.1	5.5
50°-60°	80.5	1.7
60°-70°	23.0	0.5
70°-80°	6.2	0.1
80°-90°	2.2	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	3374.6	72.3
0°-40°	4299.2	92.1
0°-60°	4638.8	99.3
0°-90°	4670.2	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	4670.2	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	6926	
5°	6288	569
15°	4543	1277
25°	3370	1528
35°	1432	925
45°	319	259
55°	85	80
65°	22	23
75°	6	6
85°	3	2
90°	0	



TEST NUMBER: P584729

CATALOG NUMBER: HC845D010-HM82555930-81MDH

CANDELA DISTRIBUTION (FULL):

0°	
0°	6926.2
2.5°	6730.3
5°	6287.7
7.5°	5788.2
10°	5310.9
12.5°	4893.6
15°	4542.7
17.5°	4232.9
20°	3938.9
22.5°	3667.0
25°	3369.9
27.5°	3034.8
30°	2636.4
32.5°	2121.1
35°	1432.0
37.5°	891.5
40°	594.4
42.5°	426.7
45°	319.3
47.5°	233.9
50°	167.5
52.5°	116.9
55°	85.4
57.5°	56.9
60°	41.1
62.5°	28.5
65°	22.2
67.5°	15.8
70°	12.7
72.5°	6.3
75°	6.3
77.5°	3.2
80°	3.2
82.5°	3.2
85°	3.2
87.5°	0.0
90°	0.0



Report Generated By 670245859 / DESKTOP-HRDQ47P





— 0°-180°







(END OF REPORT)