

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: HALO COMMERCIAL

Report Number: P584748

Luminaire Tested: **HC845D010-HM82555935-81NDC**

Issue Date: 10/21/2021

Test Information

Test Method: LM-41-14
Report Number: P584748
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2109-368-1)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 10/21/2021
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: HALO COMMERCIAL
Catalog Number: HC845D010-HM82555935-81NDC
Description: HALO COMMERCIAL 8" ROUND, NEW CONSTRUCTION FRAME, WITH 8" NARROW DISTRIBUTION, SPECULAR TRIM
Light Source: (1) HIGH LUMEN LED 90CRI / 3500K CCT
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 4720.8 lumens
Efficiency: N/A
Efficacy: 107.3 lumens/watt
Spacing Criteria (0/90/45): 0.22 / 0.22 / 0.27
Luminous Opening: Circular (Dia: 0.67' x H: 0')
CIE Type: Direct


Input Watts (W): 44
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P584748

CATALOG NUMBER: HC845D010-HM82555935-81NDC

Luminous Intensity Polar Plot

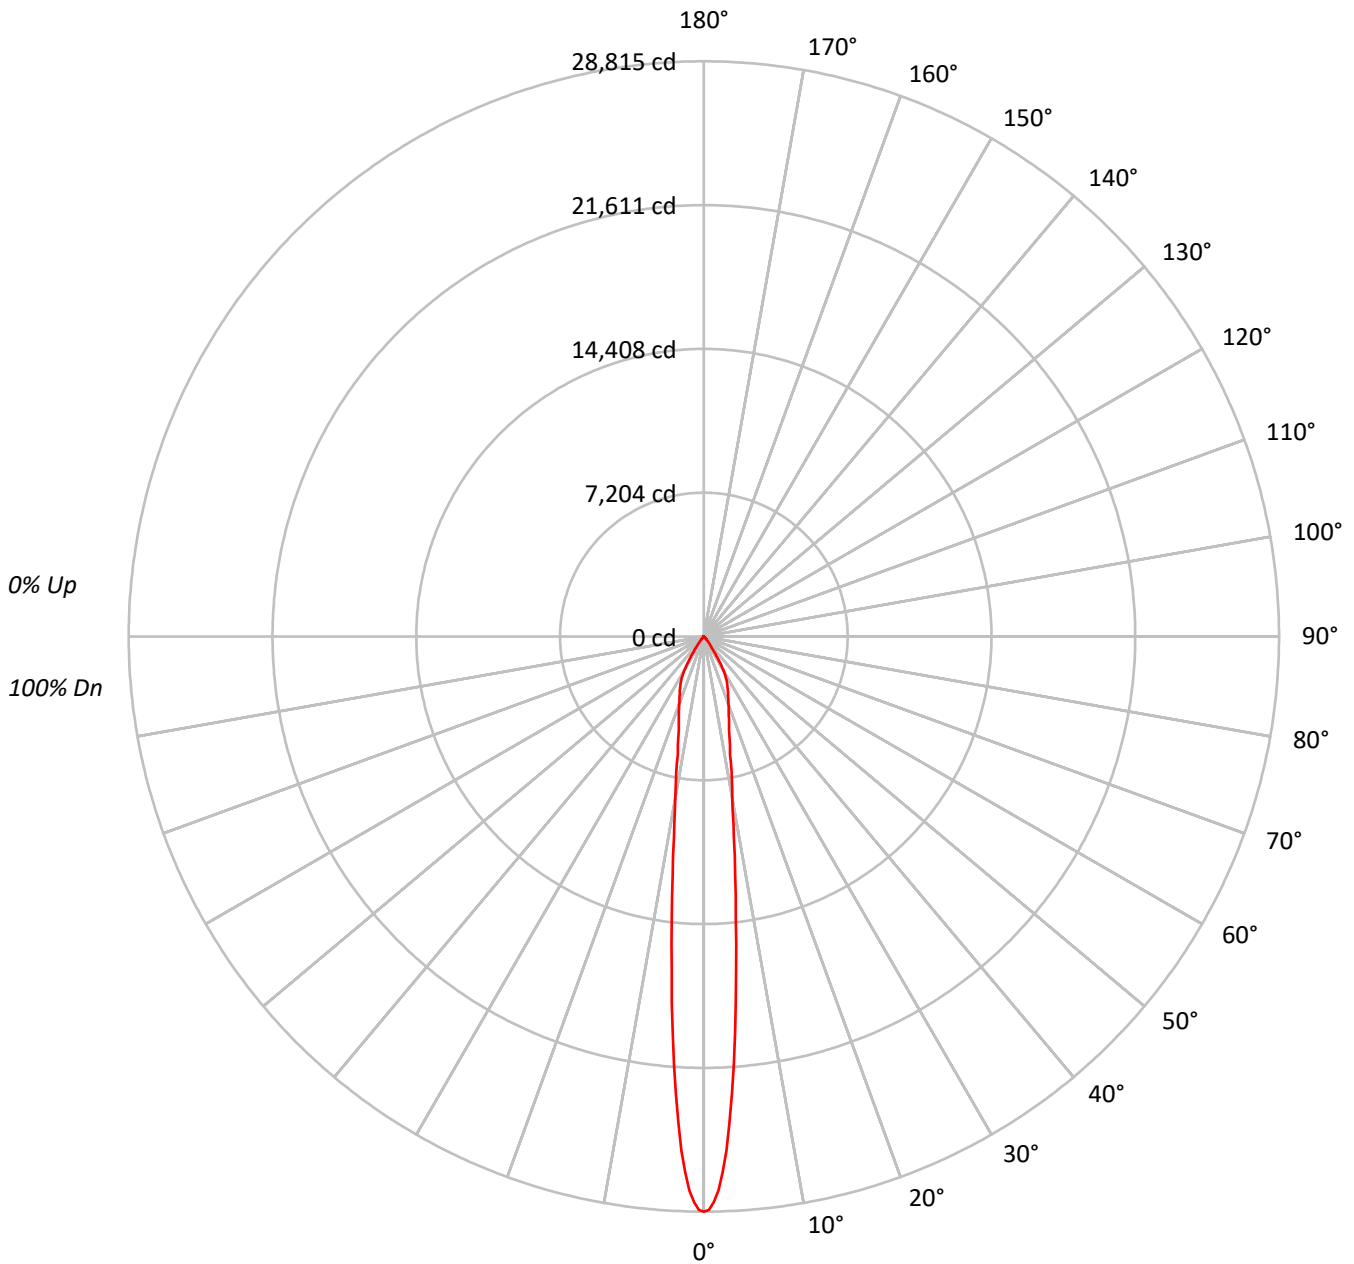



TEST NUMBER: P584748

CATALOG NUMBER: HC845D010-HM82555935-81NDC

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	100	100	100
1	115	112	110	108	112	110	108	107	106	105	103	102	101	100	99	98	97	96	96	96	96
2	110	106	103	100	108	104	101	99	101	99	97	98	96	95	96	94	93	91	91	91	91
3	106	101	97	93	104	99	96	93	97	94	91	95	92	90	92	90	89	87	87	87	87
4	102	96	91	88	100	95	91	88	93	89	87	91	88	86	89	87	85	83	83	83	83
5	98	92	87	83	97	91	86	83	89	85	82	87	84	82	86	83	81	80	80	80	80
6	95	88	83	79	93	87	82	79	86	82	79	84	81	78	83	80	78	76	76	76	76
7	91	84	79	76	90	83	79	76	82	78	75	81	78	75	80	77	75	73	73	73	73
8	88	81	76	73	87	80	76	73	79	75	72	78	75	72	77	74	72	71	71	71	71
9	85	78	73	70	84	77	73	70	76	72	70	76	72	69	75	72	69	68	68	68	68
10	83	75	70	67	82	75	70	67	74	70	67	73	69	67	73	69	67	66	66	66	66

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	888548
5°	569933
10°	257460
15°	155346
20°	118378
25°	95598
30°	70053
35°	25365
40°	9468
45°	4295
50°	1372
55°	339
60°	197
65°	233
70°	0
75°	0
80°	568
85°	1132



TEST NUMBER: P584748

CATALOG NUMBER: HC845D010-HM82555935-81NDC

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	1404.3	29.7
10°-20°	1426.3	30.2
20°-30°	1276.8	27.0
30°-40°	514.3	10.9
40°-50°	84.3	1.8
50°-60°	7.7	0.2
60°-70°	2.8	0.1
70°-80°	2.1	0.0
80°-90°	3.1	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	4107.4	87.0
0°-40°	4621.7	97.9
0°-60°	4713.7	99.8
0°-90°	4721.7	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	4720.8	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	28815	
5°	18412	###
15°	4866	1426
25°	2810	1277
35°	674	514
45°	98	84
55°	6	8
65°	3	3
75°	0	2
85°	3	3
90°	0	



TEST NUMBER: P584748

CATALOG NUMBER: HC845D010-HM82555935-81NDC

CANDELA DISTRIBUTION (FULL):

	0°
0°	28815.0
0.5°	28725.9
1°	28354.1
1.5°	27756.6
2°	26850.7
2.5°	25779.6
3°	24438.4
3.5°	22966.8
4°	21511.1
4.5°	19880.6
5°	18412.2
5.5°	16813.4
6°	15516.7
6.5°	14166.0
7°	13104.4
7.5°	11982.4
8°	11079.7
8.5°	10173.9
9°	9493.8
9.5°	8743.7
10°	8222.4
12.5°	6064.3
15°	4866.1
17.5°	4157.2
20°	3607.4
22.5°	3168.9
25°	2809.7
27.5°	2450.5
30°	1967.4
32.5°	1265.0
35°	673.8
37.5°	371.8
40°	235.2
42.5°	155.8
45°	98.5
47.5°	60.4
50°	28.6
52.5°	9.5
55°	6.3
57.5°	3.2
60°	3.2
62.5°	3.2
65°	3.2



TEST NUMBER: P584748

CATALOG NUMBER: HC845D010-HM82555935-81NDC

CANDELA DISTRIBUTION (continued):

	0°
72.5°	0.0
75°	0.0
77.5°	3.2
80°	3.2
82.5°	3.2
85°	3.2
87.5°	3.2
90°	0.0



Report Generated By 670245859 / DESKTOP-HRDQ47P





— 0°-180°







67.5°		3.2
70°		0.0



(END OF REPORT)