

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: HALO COMMERCIAL

Report Number: P583445

Luminaire Tested: **HC805D010-HM80520830-81NDW**

Issue Date: 10/21/2021

Test Information

Test Method: LM-41-14
Report Number: P583445
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2109-368-3)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 10/21/2021
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: HALO COMMERCIAL
Catalog Number: HC805D010-HM80520830-81NDW
Description: HALO COMMERCIAL 8" ROUND, NEW CONSTRUCTION FRAME, WITH 8" NARROW DISTRIBUTION, WHITE TRIM
Light Source: (1) HIGH LUMEN LED 80CRI / 3000K CCT
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 631.7 lumens
Efficiency: N/A
Efficacy: 105.3 lumens/watt
Spacing Criteria (0/90/45): 1.06 / 1.06 / 0.92
Luminous Opening: Circular (Dia: 0.67' x H: 0')
CIE Type: Direct


Input Watts (W): 6
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P583445

CATALOG NUMBER: HC805D010-HM80520830-81NDW

Luminous Intensity Polar Plot

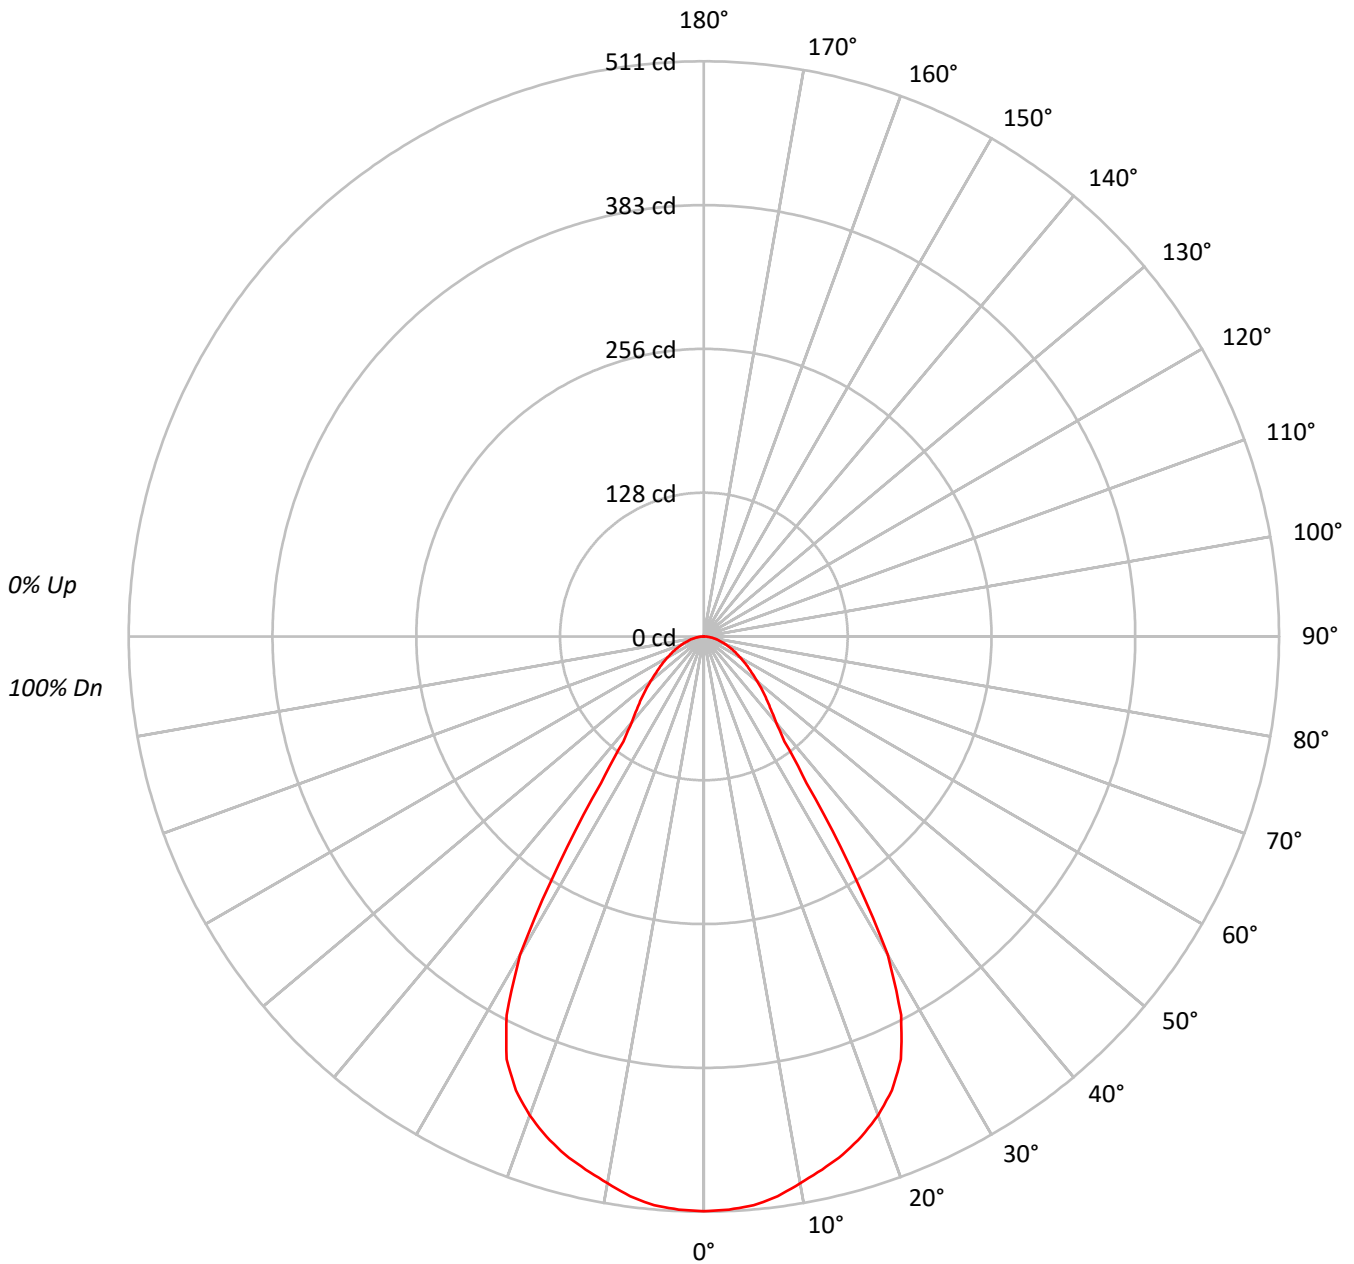



TEST NUMBER: P583445

CATALOG NUMBER: HC805D010-HM80520830-81NDW

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			
1	112	108	105	102	109	106	103	101	102	100	98	98	96	95	95	93	92	90			
2	105	99	94	90	102	97	92	88	94	90	87	91	87	85	88	85	83	81			
3	98	90	84	79	96	89	83	79	86	81	77	84	80	76	81	78	75	73			
4	92	83	76	71	90	82	76	71	80	74	70	77	73	69	75	72	68	67			
5	87	77	70	65	85	76	69	64	74	68	64	72	67	63	70	66	63	61			
6	82	71	64	59	80	70	64	59	69	63	58	67	62	58	66	61	58	56			
7	77	66	59	54	76	66	59	54	64	58	54	63	58	54	62	57	53	52			
8	73	62	55	50	71	61	55	50	60	54	50	59	54	50	58	53	49	48			
9	69	58	51	47	68	57	51	47	56	51	46	55	50	46	55	50	46	45			
10	65	55	48	44	64	54	48	44	53	47	43	52	47	43	52	47	43	42			

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	15745
5°	15703
10°	15443
15°	15215
20°	14852
25°	14100
30°	11626
35°	5989
40°	4009
45°	3436
50°	2965
55°	2586
60°	2294
65°	2072
70°	1866
75°	1680
80°	1509
85°	1486



TEST NUMBER: P583445

CATALOG NUMBER: HC805D010-HM80520830-81NDW

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	48.0	7.6
10°-20°	134.1	21.2
20°-30°	185.8	29.4
30°-40°	111.6	17.7
40°-50°	61.1	9.7
50°-60°	43.4	6.9
60°-70°	28.2	4.5
70°-80°	15.1	2.4
80°-90°	4.5	0.7
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	367.9	58.2
0°-40°	479.5	75.9
0°-60°	584.0	92.4
0°-90°	631.7	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	631.7	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	511	
5°	507	48
15°	477	134
25°	414	186
35°	159	112
45°	79	61
55°	48	43
65°	28	28
75°	14	15
85°	4	4
90°	0	



TEST NUMBER: P583445

CATALOG NUMBER: HC805D010-HM80520830-81NDW

CANDELA DISTRIBUTION (FULL):

	0°
0°	510.6
2.5°	509.7
5°	507.3
7.5°	501.7
10°	493.2
12.5°	485.1
15°	476.6
17.5°	465.8
20°	452.6
22.5°	436.5
25°	414.4
27.5°	379.4
30°	326.5
32.5°	239.3
35°	159.1
37.5°	117.5
40°	99.6
42.5°	88.2
45°	78.8
47.5°	69.9
50°	61.8
52.5°	54.2
55°	48.1
57.5°	42.5
60°	37.2
62.5°	32.6
65°	28.4
67.5°	24.1
70°	20.7
72.5°	17.0
75°	14.1
77.5°	11.4
80°	8.5
82.5°	6.1
85°	4.2
87.5°	1.9
90°	0.0



Report Generated By 670245859 / DESKTOP-HRDQ47P





— 0°-180°







(END OF REPORT)