

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: HALO COMMERCIAL

Report Number: P583496

Luminaire Tested: **HC805D010-HM80520927-81NDW**

Issue Date: 10/21/2021

Test Information

Test Method: LM-41-14
Report Number: P583496
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2109-368-3)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 10/21/2021
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: HALO COMMERCIAL
Catalog Number: HC805D010-HM80520927-81NDW
Description: HALO COMMERCIAL 8" ROUND, NEW CONSTRUCTION FRAME, WITH 8" NARROW DISTRIBUTION, WHITE TRIM
Light Source: (1) HIGH LUMEN LED 90CRI / 2700K CCT
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 515.8 lumens
Efficiency: N/A
Efficacy: 86.0 lumens/watt
Spacing Criteria (0/90/45): 1.06 / 1.06 / 0.92
Luminous Opening: Circular (Dia: 0.67' x H: 0')
CIE Type: Direct


Input Watts (W): 6
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P583496

CATALOG NUMBER: HC805D010-HM80520927-81NDW

Luminous Intensity Polar Plot

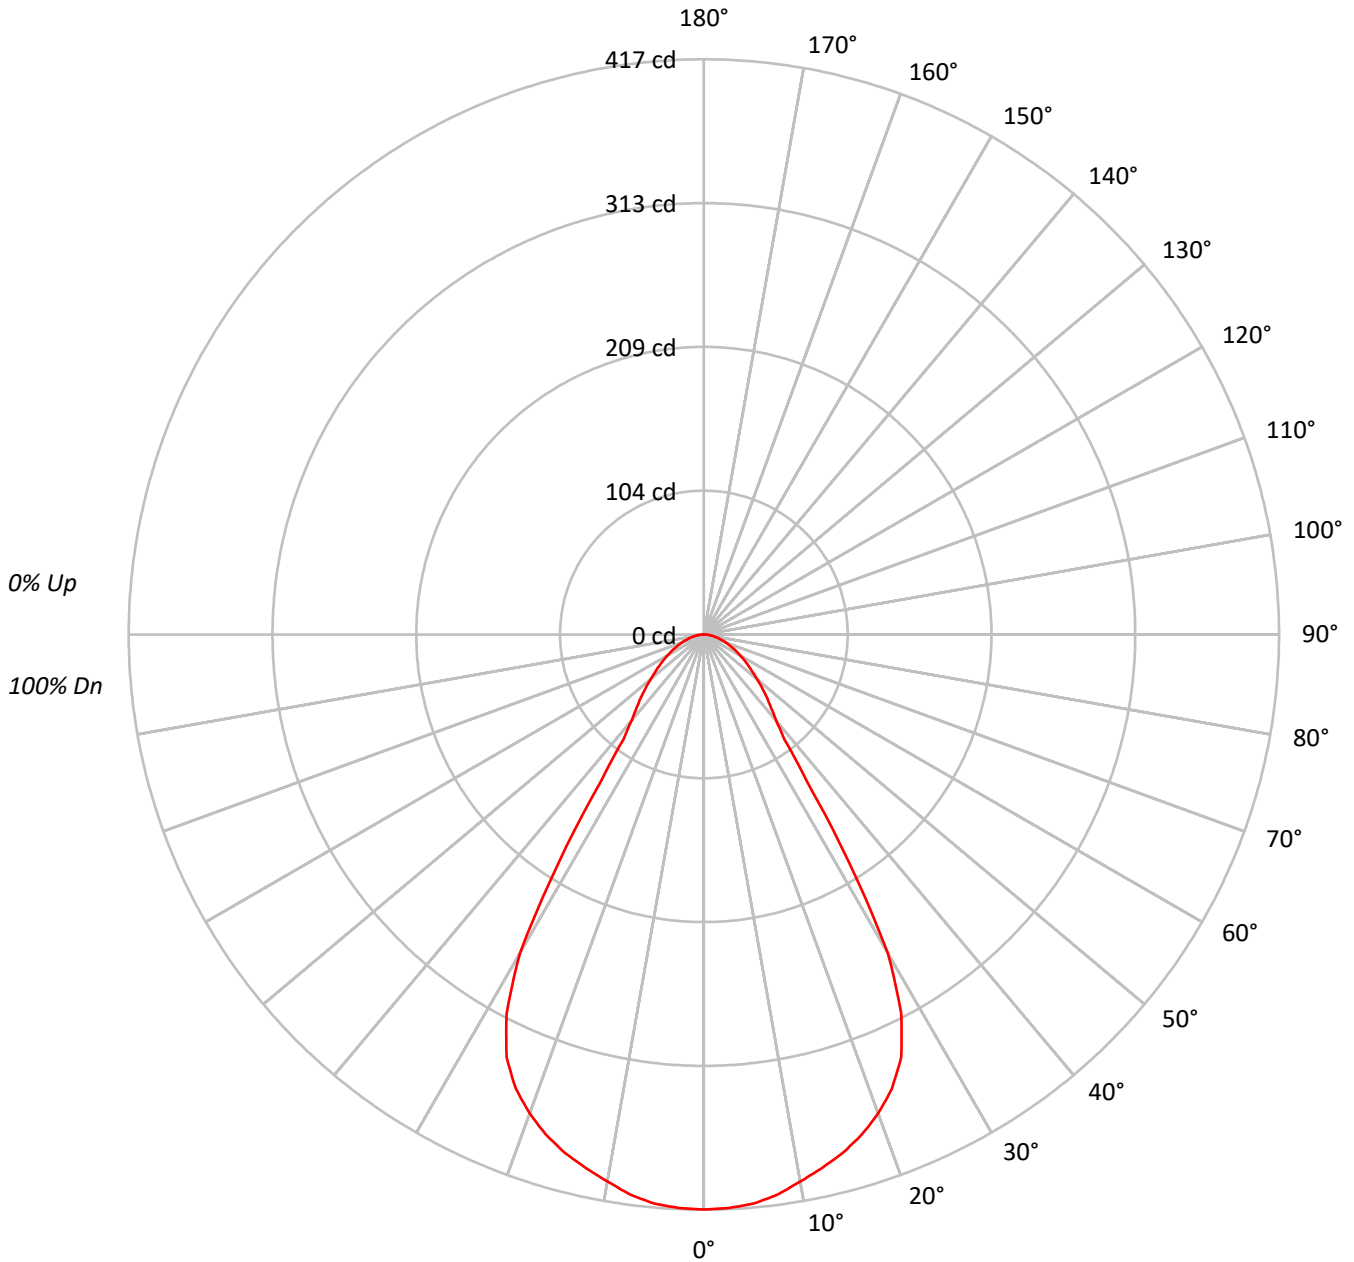



TEST NUMBER: P583496

CATALOG NUMBER: HC805D010-HM80520927-81NDW

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			
1	112	108	105	102	109	106	103	101	102	100	98	98	96	95	95	93	92	90			
2	105	99	94	90	102	97	92	88	94	90	87	91	87	85	88	85	83	81			
3	98	90	84	79	96	89	83	79	86	81	77	84	80	76	81	78	75	73			
4	92	83	76	71	90	82	76	71	80	74	70	77	73	69	75	72	68	67			
5	87	77	70	65	85	76	69	64	74	68	64	72	67	63	70	66	63	61			
6	82	71	64	59	80	70	64	59	69	63	58	67	62	58	66	61	58	56			
7	77	66	59	54	76	66	59	54	64	58	54	63	58	54	62	57	53	52			
8	73	62	55	50	71	61	55	50	60	54	50	59	54	50	58	53	49	48			
9	69	58	51	47	68	57	51	47	56	51	46	55	50	46	55	50	46	45			
10	65	55	48	44	64	54	48	44	53	47	43	52	47	43	52	47	43	42			

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	12856
5°	12821
10°	12606
15°	12422
20°	12125
25°	11510
30°	9493
35°	4890
40°	3273
45°	2808
50°	2423
55°	2113
60°	1875
65°	1685
70°	1533
75°	1382
80°	1225
85°	1238



TEST NUMBER: P583496

CATALOG NUMBER: HC805D010-HM80520927-81NDW

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	39.2	7.6
10°-20°	109.5	21.2
20°-30°	151.7	29.4
30°-40°	91.1	17.7
40°-50°	49.9	9.7
50°-60°	35.4	6.9
60°-70°	23.0	4.5
70°-80°	12.3	2.4
80°-90°	3.7	0.7
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	300.3	58.2
0°-40°	391.5	75.9
0°-60°	476.8	92.4
0°-90°	515.8	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	515.8	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	417	
5°	414	39
15°	389	109
25°	338	152
35°	130	91
45°	64	50
55°	39	35
65°	23	23
75°	12	12
85°	4	4
90°	0	



TEST NUMBER: P583496

CATALOG NUMBER: HC805D010-HM80520927-81NDW

CANDELA DISTRIBUTION (FULL):

0°	
0°	416.9
2.5°	416.1
5°	414.2
7.5°	409.5
10°	402.6
12.5°	396.1
15°	389.1
17.5°	380.3
20°	369.5
22.5°	356.3
25°	338.3
27.5°	309.8
30°	266.6
32.5°	195.4
35°	129.9
37.5°	95.9
40°	81.3
42.5°	72.1
45°	64.4
47.5°	57.0
50°	50.5
52.5°	44.3
55°	39.3
57.5°	34.7
60°	30.4
62.5°	26.6
65°	23.1
67.5°	19.6
70°	17.0
72.5°	13.9
75°	11.6
77.5°	9.2
80°	6.9
82.5°	5.0
85°	3.5
87.5°	1.6
90°	0.0



Report Generated By 670245859 / DESKTOP-HRDQ47P





— 0°-180°







(END OF REPORT)