

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: HALO COMMERCIAL

Report Number: P583520

Luminaire Tested: **HC805D010-HM80520930-81WDW**

Issue Date: 10/21/2021

**Test Information**

Test Method: LM-41-14  
Report Number: P583520  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2109-368-9)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 10/21/2021  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: HALO COMMERCIAL  
Catalog Number: HC805D010-HM80520930-81WDW  
Description: HALO COMMERCIAL 8" ROUND, NEW CONSTRUCTION FRAME, WITH 8" WIDE DISTRIBUTION, WHITE TRIM  
Light Source: (1) HIGH LUMEN LED 90CRI / 3000K CCT  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 655.2 lumens  
Efficiency: N/A  
Efficacy: 109.2 lumens/watt  
Spacing Criteria (0/90/45): 1.17 / 1.17 / 1.06  
Luminous Opening: Circular (Dia: 0.67' x H: 0')  
CIE Type: Direct


Input Watts (W): 6  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P583520

CATALOG NUMBER: HC805D010-HM80520930-81WDW

### Luminous Intensity Polar Plot

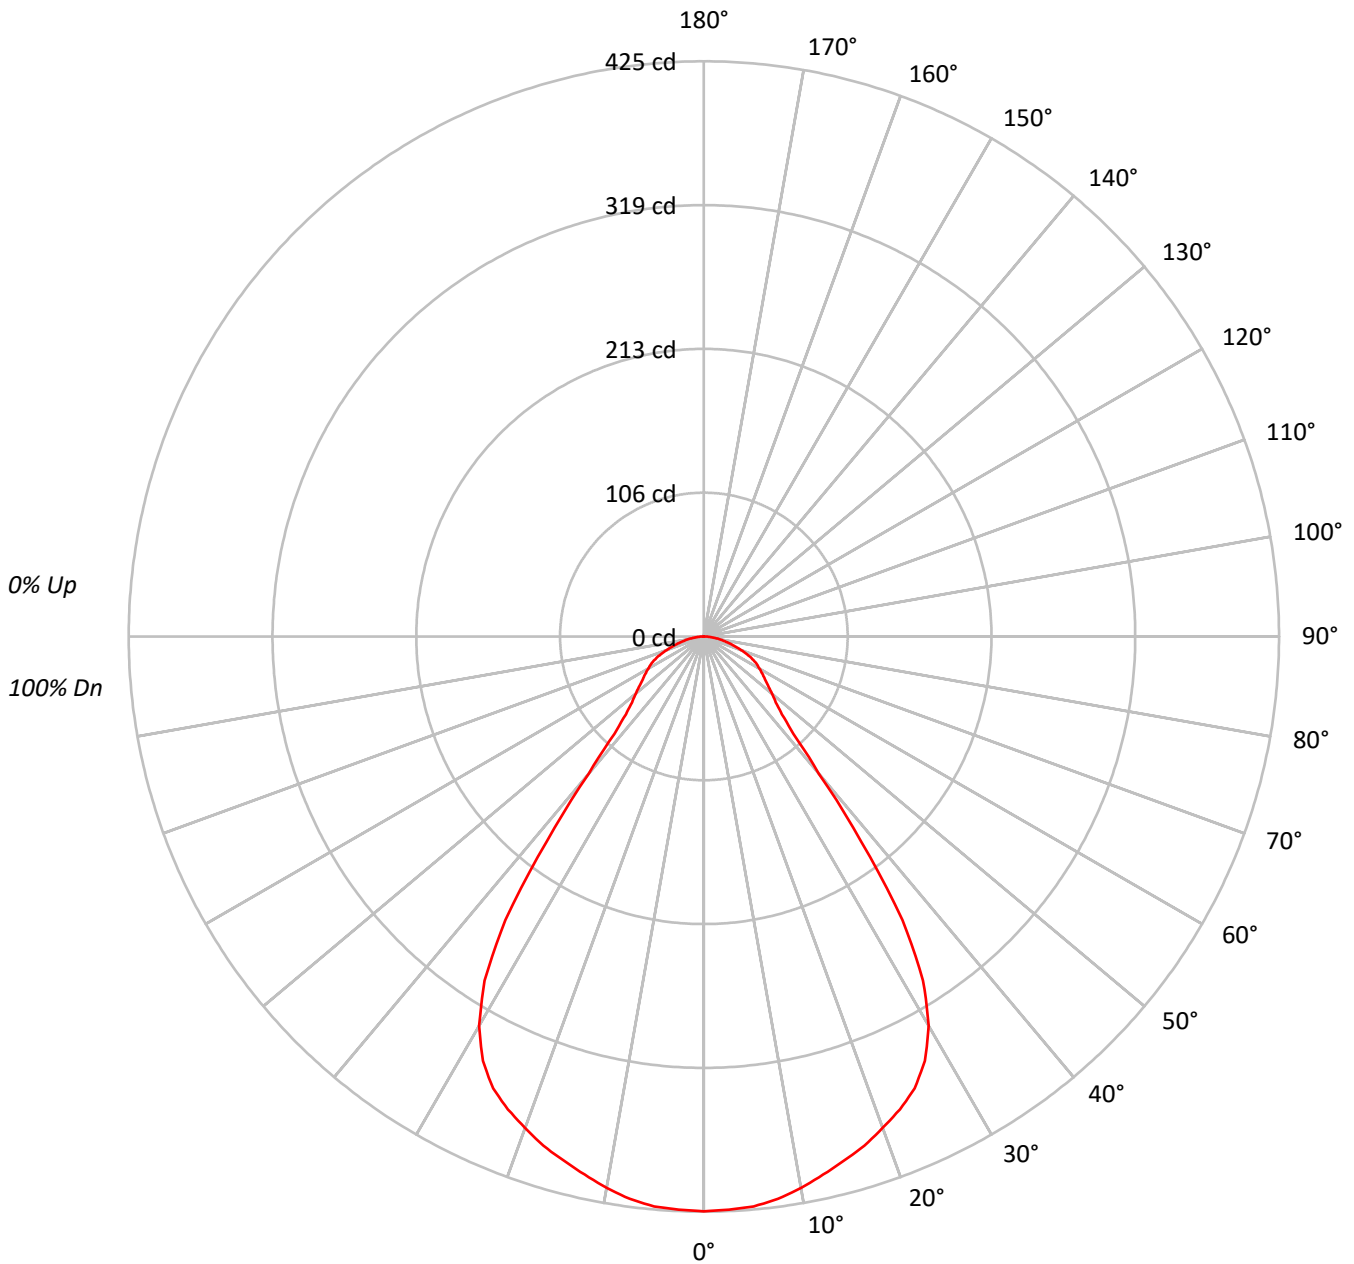



TEST NUMBER: P583520

CATALOG NUMBER: HC805D010-HM80520930-81WDW

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			100
1	111	108	104	101	109	105	102	100	101	99	96	97	95	94	94	92	91	89			89
2	104	97	92	87	101	95	90	86	92	88	84	89	85	82	86	83	81	79			79
3	97	88	82	76	94	87	81	76	84	79	75	81	77	73	79	75	72	70			70
4	90	80	73	68	88	79	73	67	77	71	67	75	70	66	73	68	65	63			63
5	84	74	66	61	82	73	66	61	71	65	60	69	64	59	67	63	59	57			57
6	79	68	61	55	77	67	60	55	65	59	55	64	58	54	62	58	54	52			52
7	74	63	56	50	73	62	55	50	61	54	50	59	54	50	58	53	49	48			48
8	70	58	51	46	69	58	51	46	57	50	46	55	50	46	54	49	45	44			44
9	66	54	47	43	65	54	47	42	53	47	42	52	46	42	51	46	42	40			40
10	62	51	44	39	61	50	44	39	49	43	39	49	43	39	48	43	39	37			37

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	13099
5°	13084
10°	12954
15°	12798
20°	12680
25°	12534
30°	11829
35°	9633
40°	5318
45°	3554
50°	3152
55°	2962
60°	2917
65°	2889
70°	2615
75°	2335
80°	2042
85°	1804



TEST NUMBER: P583520

CATALOG NUMBER: HC805D010-HM80520930-81WDW

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	40.1	6.1
10°-20°	113.2	17.3
20°-30°	168.2	25.7
30°-40°	151.4	23.1
40°-50°	67.2	10.3
50°-60°	49.8	7.6
60°-70°	38.7	5.9
70°-80°	20.9	3.2
80°-90°	5.8	0.9
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	321.4	49.1
0°-40°	472.9	72.2
0°-60°	589.8	90.0
0°-90°	655.2	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	655.2	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	425	
5°	423	40
15°	401	113
25°	368	168
35°	256	151
45°	82	67
55°	55	50
65°	40	39
75°	20	21
85°	5	6
90°	0	



TEST NUMBER: P583520

CATALOG NUMBER: HC805D010-HM80520930-81WDW

**CANDELA DISTRIBUTION (FULL):**

0°	
0°	424.8
2.5°	423.9
5°	422.7
7.5°	419.2
10°	413.7
12.5°	407.3
15°	400.9
17.5°	394.5
20°	386.4
22.5°	378.3
25°	368.4
27.5°	353.6
30°	332.2
32.5°	301.5
35°	255.9
37.5°	191.0
40°	132.1
42.5°	97.7
45°	81.5
47.5°	72.1
50°	65.7
52.5°	59.7
55°	55.1
57.5°	51.2
60°	47.3
62.5°	43.9
65°	39.6
67.5°	34.6
70°	29.0
72.5°	24.3
75°	19.6
77.5°	15.3
80°	11.5
82.5°	8.1
85°	5.1
87.5°	2.2
90°	0.0



Report Generated By 670245859 / DESKTOP-HRDQ47P







— 0°-180°







(END OF REPORT)