

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: HALO COMMERCIAL

Report Number: P583534

Luminaire Tested: **HC805D010-HM80520935-81WDBB**

Issue Date: 10/21/2021

Test Information

Test Method: LM-41-14
Report Number: P583534
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2109-368-11)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 10/21/2021
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: HALO COMMERCIAL
Catalog Number: HC805D010-HM80520935-81WDBB
Description: HALO COMMERCIAL 8" ROUND, NEW CONSTRUCTION FRAME, WITH 8" WIDE DISTRIBUTION, BLACK BAFFLE TRIM
Light Source: (1) HIGH LUMEN LED 90CRI / 3500K CCT
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 674.9 lumens
Efficiency: N/A
Efficacy: 112.5 lumens/watt
Spacing Criteria (0/90/45): 1.32 / 1.32 / 1.13
Luminous Opening: Circular (Dia: 0.67' x H: 0')
CIE Type: Direct


Input Watts (W): 6
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P583534

CATALOG NUMBER: HC805D010-HM80520935-81WDBB

Luminous Intensity Polar Plot

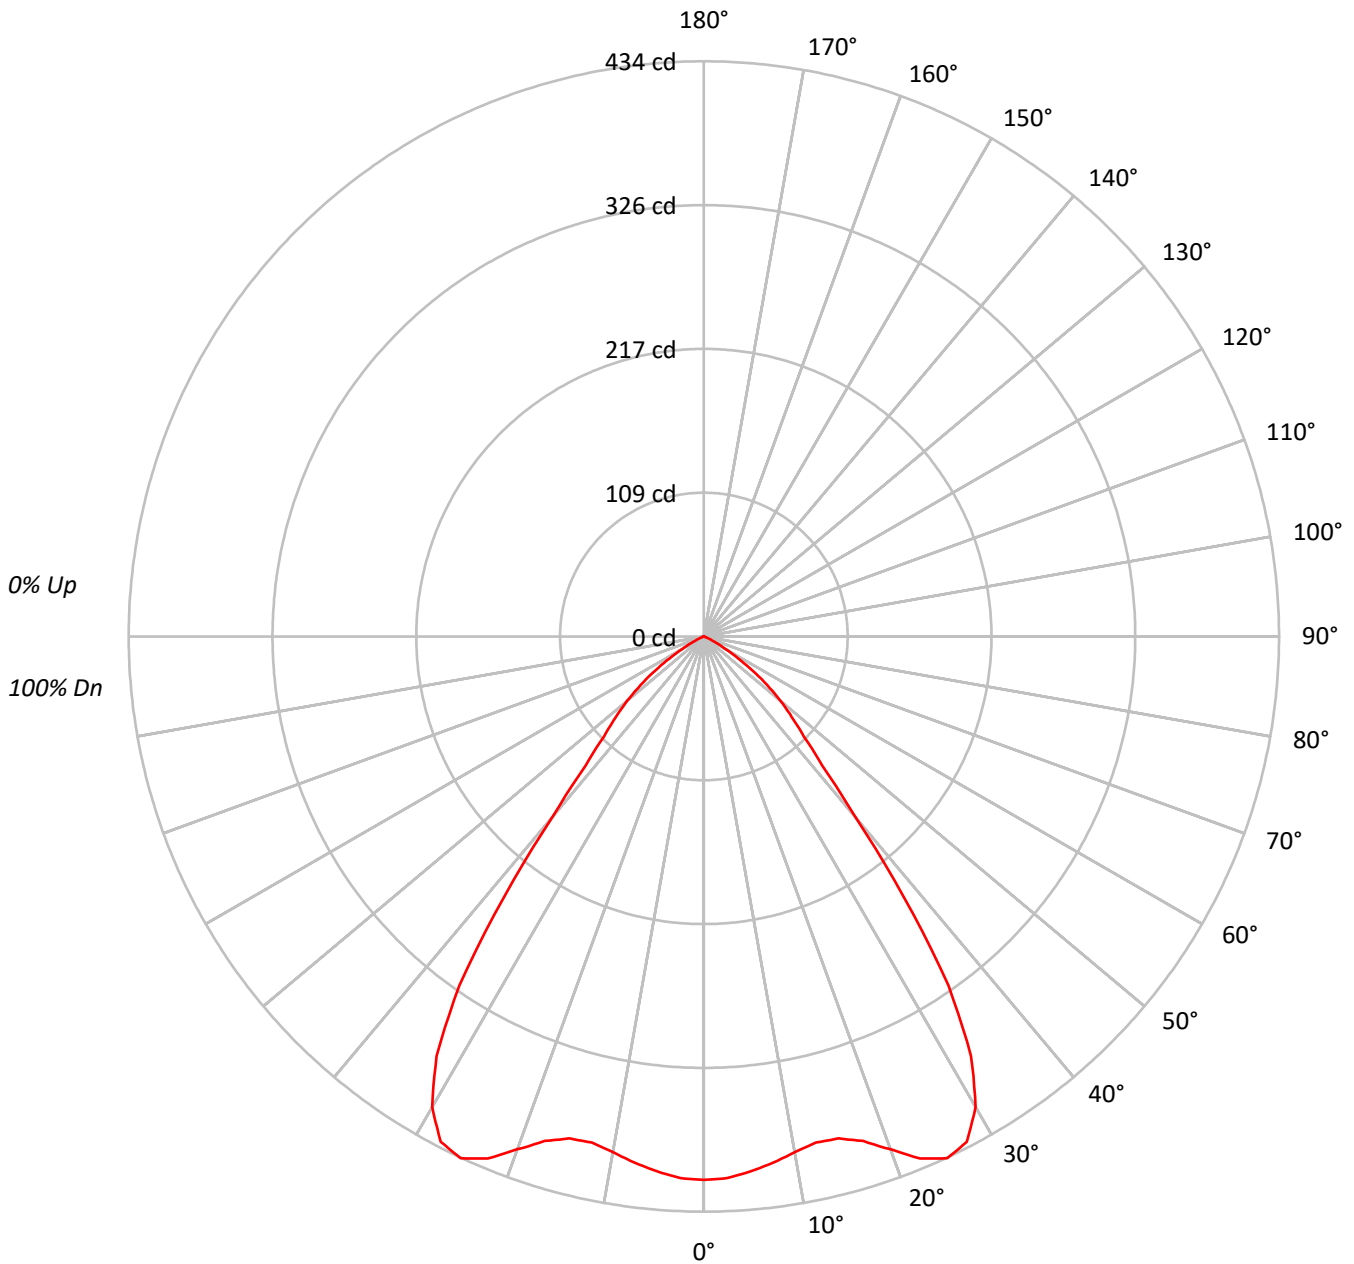



TEST NUMBER: P583534

CATALOG NUMBER: HC805D010-HM80520935-81WDBB

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			
1	113	109	107	104	110	107	105	102	103	101	99	99	98	96	96	95	93	92			
2	106	100	95	92	104	98	94	91	95	92	88	92	89	87	89	87	85	83			
3	99	92	86	81	97	90	85	81	88	83	79	85	81	78	83	80	77	75			
4	93	84	78	73	91	83	77	72	81	76	71	79	74	71	77	73	70	68			
5	87	77	71	66	85	76	70	65	74	69	65	73	68	64	71	67	63	62			
6	82	71	64	59	80	70	64	59	69	63	59	67	62	58	66	61	58	56			
7	77	66	59	54	75	65	59	54	64	58	54	63	57	53	61	57	53	51			
8	72	61	54	49	71	61	54	49	59	53	49	58	53	49	57	52	49	47			
9	68	57	50	45	67	56	50	45	55	49	45	54	49	45	53	48	45	43			
10	64	53	46	42	63	52	46	42	52	46	42	51	45	41	50	45	41	40			

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	12643
5°	12540
10°	12371
15°	12514
20°	13513
25°	14780
30°	14599
35°	12114
40°	7125
45°	4657
50°	3612
55°	2398
60°	1166
65°	358
70°	117
75°	119
80°	89
85°	177



TEST NUMBER: P583534

CATALOG NUMBER: HC805D010-HM80520935-81WDBB

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	38.4	5.7
10°-20°	112.6	16.7
20°-30°	196.9	29.2
30°-40°	191.5	28.4
40°-50°	87.1	12.9
50°-60°	40.4	6.0
60°-70°	6.8	1.0
70°-80°	0.9	0.1
80°-90°	0.3	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	347.9	51.5
0°-40°	539.4	79.9
0°-60°	666.9	98.8
0°-90°	674.9	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	674.9	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	410	
5°	405	38
15°	392	113
25°	434	197
35°	322	192
45°	107	87
55°	45	40
65°	5	7
75°	1	1
85°	0	0
90°	0	



TEST NUMBER: P583534

CATALOG NUMBER: HC805D010-HM80520935-81WDBB

CANDELA DISTRIBUTION (FULL):

	0°
0°	410.0
2.5°	409.1
5°	405.1
7.5°	400.5
10°	395.1
12.5°	391.1
15°	392.0
17.5°	399.2
20°	411.8
22.5°	426.3
25°	434.4
27.5°	429.8
30°	410.0
32.5°	375.3
35°	321.8
37.5°	247.8
40°	177.0
42.5°	132.0
45°	106.8
47.5°	90.1
50°	75.3
52.5°	60.0
55°	44.6
57.5°	30.6
60°	18.9
62.5°	10.4
65°	4.9
67.5°	2.3
70°	1.3
72.5°	1.0
75°	1.0
77.5°	0.5
80°	0.5
82.5°	0.5
85°	0.5
87.5°	0.0
90°	0.0



Report Generated By 670245859 / DESKTOP-HRDQ47P





— 0°-180°







(END OF REPORT)