

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: HALO COMMERCIAL

Report Number: P583526

Luminaire Tested: **HC805D010-HM80520935-81MDH**

Issue Date: 10/21/2021

Test Information

Test Method: LM-41-14
Report Number: P583526
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2109-368-5)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 10/21/2021
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: HALO COMMERCIAL
Catalog Number: HC805D010-HM80520935-81MDH
Description: HALO COMMERCIAL 8" ROUND, NEW CONSTRUCTION FRAME, WITH 8" MEDIUM DISTRIBUTION, HAZE TRIM
Light Source: (1) HIGH LUMEN LED 90CRI / 3500K CCT
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 665.4 lumens
Efficiency: N/A
Efficacy: 110.9 lumens/watt
Spacing Criteria (0/90/45): 0.68 / 0.68 / 0.81
Luminous Opening: Circular (Dia: 0.67' x H: 0')
CIE Type: Direct


Input Watts (W): 6
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P583526

CATALOG NUMBER: HC805D010-HM80520935-81MDH

Luminous Intensity Polar Plot

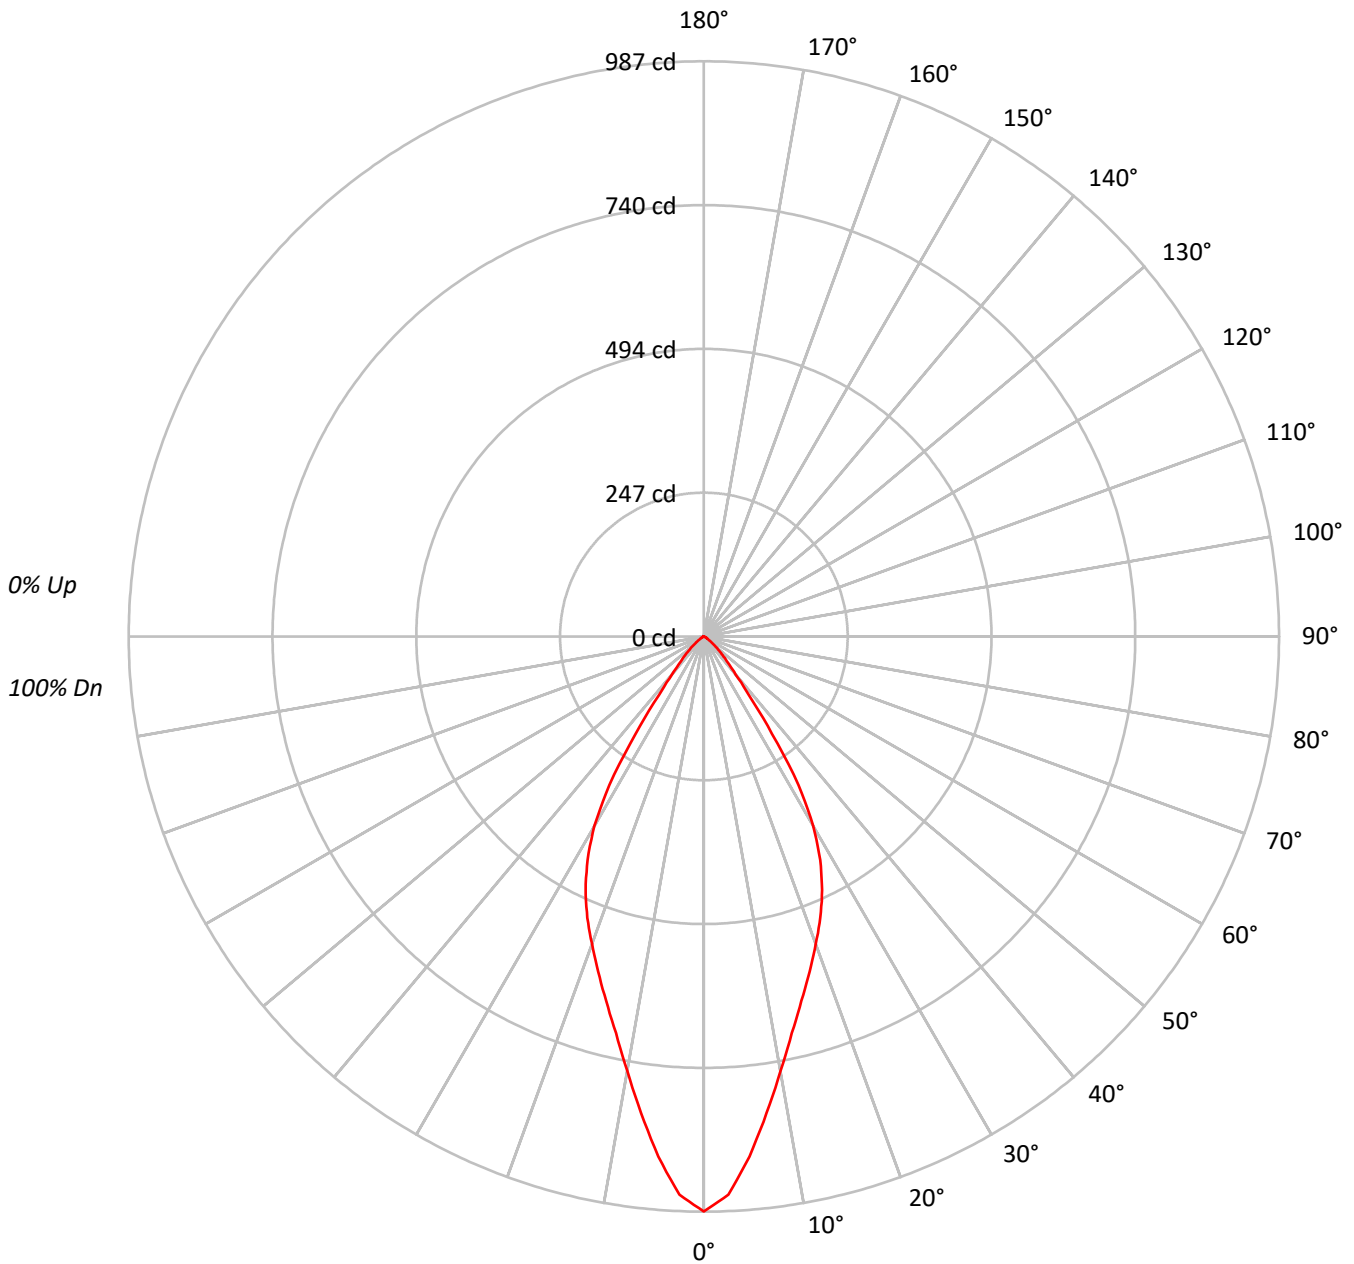



TEST NUMBER: P583526

CATALOG NUMBER: HC805D010-HM80520935-81MDH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20			
RC	80				70				50				30				10		0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100		
1	114	111	108	106	111	109	106	104	105	103	101	101	99	98	97	96	95	94		
2	108	103	99	96	106	101	98	95	98	95	93	95	93	91	92	90	89	87		
3	103	96	91	87	101	95	90	87	92	88	85	90	87	84	88	85	83	81		
4	97	90	84	80	96	89	84	80	87	82	79	85	81	78	83	80	77	76		
5	93	84	79	74	91	83	78	74	82	77	73	80	76	73	78	75	72	71		
6	88	79	73	69	87	78	73	69	77	72	68	76	71	68	74	70	67	66		
7	84	75	69	64	82	74	68	64	73	68	64	71	67	64	70	66	63	62		
8	80	70	64	60	79	70	64	60	69	64	60	68	63	60	67	63	60	58		
9	76	67	61	57	75	66	60	57	65	60	56	64	60	56	63	59	56	55		
10	73	63	57	54	72	63	57	53	62	57	53	61	56	53	60	56	53	52		

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	30426
5°	27726
10°	23691
15°	20658
20°	18416
25°	16335
30°	13374
35°	7679
40°	3405
45°	1984
50°	1142
55°	656
60°	364
65°	226
70°	162
75°	119
80°	89
85°	177



TEST NUMBER: P583526

CATALOG NUMBER: HC805D010-HM80520935-81MDH

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	81.1	12.2
10°-20°	181.9	27.3
20°-30°	217.8	32.7
30°-40°	131.7	19.8
40°-50°	36.9	5.5
50°-60°	11.5	1.7
60°-70°	3.3	0.5
70°-80°	1.0	0.1
80°-90°	0.3	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	480.7	72.2
0°-40°	612.5	92.0
0°-60°	660.8	99.3
0°-90°	665.4	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	665.4	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	987	
5°	896	81
15°	647	182
25°	480	218
35°	204	132
45°	46	37
55°	12	11
65°	3	3
75°	1	1
85°	0	0
90°	0	



TEST NUMBER: P583526

CATALOG NUMBER: HC805D010-HM80520935-81MDH

CANDELA DISTRIBUTION (FULL):

0°	
0°	986.7
2.5°	958.8
5°	895.7
7.5°	824.6
10°	756.6
12.5°	697.1
15°	647.1
17.5°	603.0
20°	561.2
22.5°	522.4
25°	480.1
27.5°	432.4
30°	375.6
32.5°	302.2
35°	204.0
37.5°	127.0
40°	84.6
42.5°	60.8
45°	45.5
47.5°	33.3
50°	23.8
52.5°	16.6
55°	12.2
57.5°	8.1
60°	5.9
62.5°	4.1
65°	3.1
67.5°	2.3
70°	1.8
72.5°	1.0
75°	1.0
77.5°	0.5
80°	0.5
82.5°	0.5
85°	0.5
87.5°	0.0
90°	0.0



Report Generated By 670245859 / DESKTOP-HRDQ47P





— 0°-180°







(END OF REPORT)