

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: HALO COMMERCIAL

Report Number: P585018

Luminaire Tested: **HC855D010-HM82555935-81MDH**

Issue Date: 10/21/2021

Test Information

Test Method: LM-41-14
Report Number: P585018
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2109-368-5)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 10/21/2021
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: HALO COMMERCIAL
Catalog Number: HC855D010-HM82555935-81MDH
Description: HALO COMMERCIAL 8" ROUND, NEW CONSTRUCTION FRAME, WITH 8" MEDIUM DISTRIBUTION, HAZE TRIM
Light Source: (1) HIGH LUMEN LED 90CRI / 3500K CCT
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 5177.0 lumens
Efficiency: N/A
Efficacy: 99.6 lumens/watt
Spacing Criteria (0/90/45): 0.68 / 0.68 / 0.81
Luminous Opening: Circular (Dia: 0.67' x H: 0')
CIE Type: Direct


Input Watts (W): 52
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P585018

CATALOG NUMBER: HC855D010-HM82555935-81MDH

Luminous Intensity Polar Plot

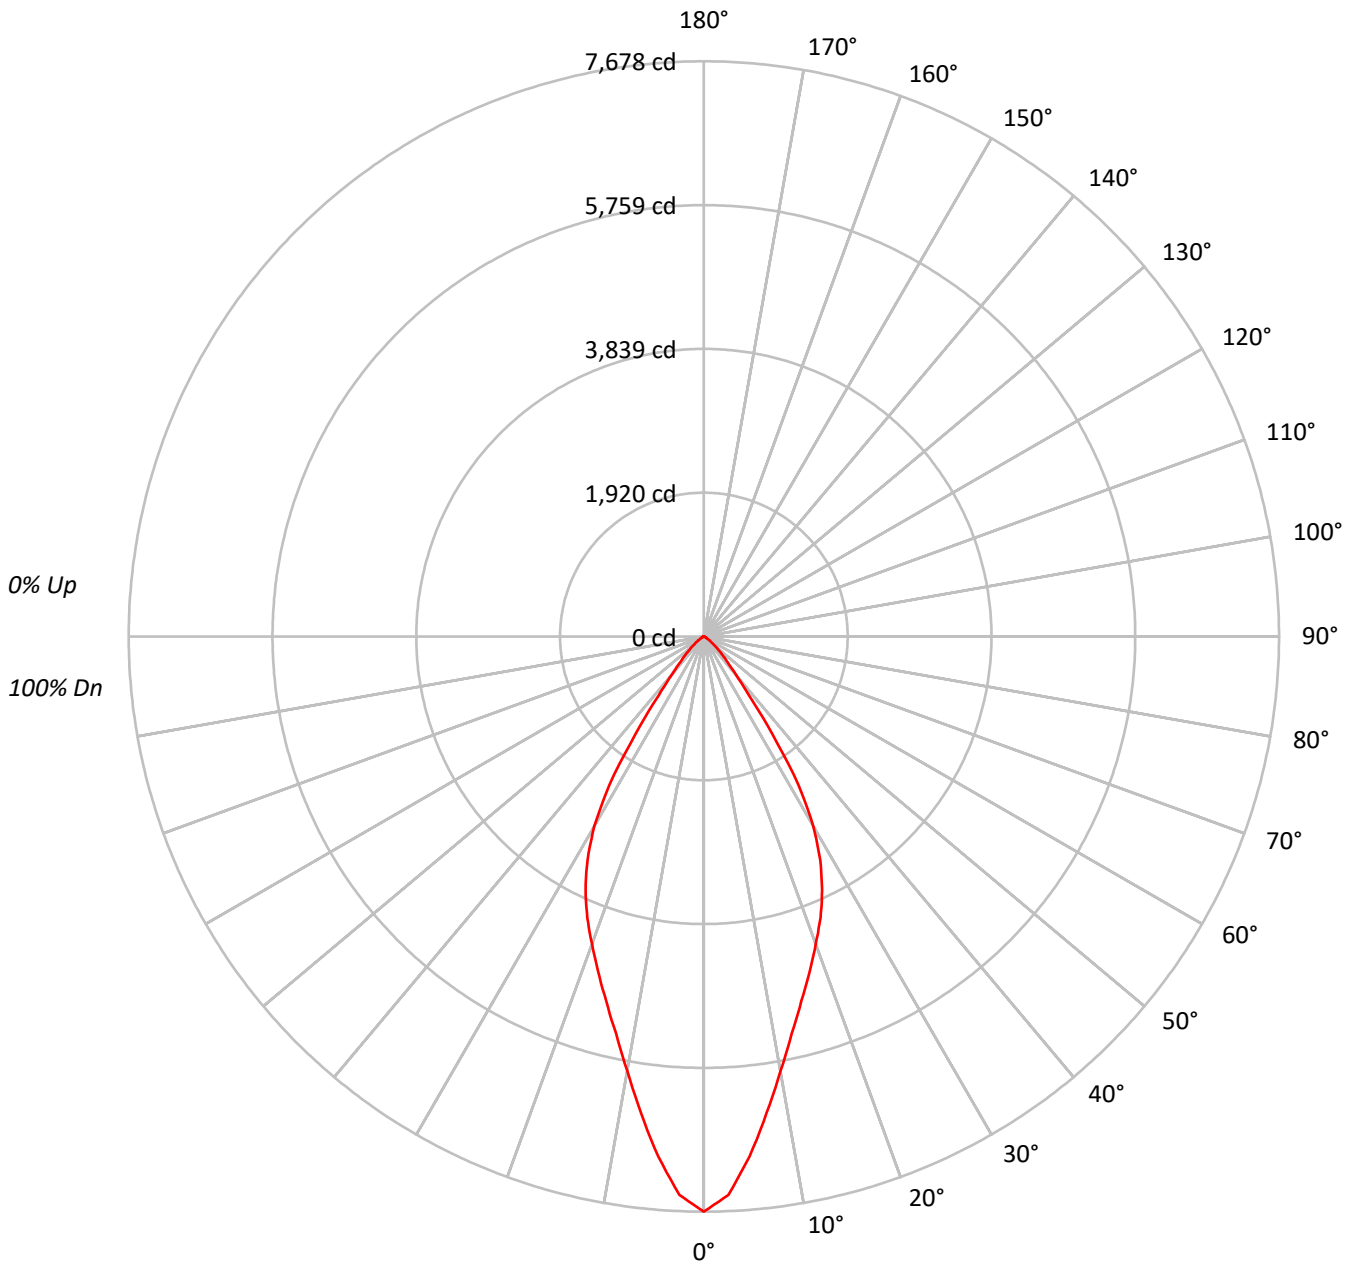



TEST NUMBER: P585018

CATALOG NUMBER: HC855D010-HM82555935-81MDH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			
1	114	111	108	106	111	109	106	104	105	103	101	101	99	98	97	96	95	94			
2	108	103	99	96	106	101	98	95	98	95	93	95	93	91	92	90	89	87			
3	103	96	91	87	101	95	90	87	92	88	85	90	87	84	88	85	83	81			
4	97	90	85	80	96	89	84	80	87	82	79	85	81	78	83	80	77	76			
5	93	84	79	74	91	83	78	74	82	77	73	80	76	73	78	75	72	71			
6	88	79	73	69	87	78	73	69	77	72	68	76	71	68	74	70	67	66			
7	84	75	69	64	82	74	68	64	73	68	64	71	67	64	70	66	63	62			
8	80	70	64	60	79	70	64	60	69	64	60	68	63	60	67	63	60	58			
9	76	67	61	57	75	66	61	57	65	60	56	64	60	56	63	59	56	55			
10	73	63	57	54	72	63	57	53	62	57	53	61	56	53	60	56	53	52			

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	236755
5°	215750
10°	184340
15°	160757
20°	143282
25°	127097
30°	104061
35°	59760
40°	26519
45°	15433
50°	8913
55°	5086
60°	2812
65°	1788
70°	1271
75°	834
80°	622
85°	1238



TEST NUMBER: P585018

CATALOG NUMBER: HC855D010-HM82555935-81MDH

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	630.9	12.2
10°-20°	1415.5	27.3
20°-30°	1694.3	32.7
30°-40°	1025.0	19.8
40°-50°	287.3	5.5
50°-60°	89.2	1.7
60°-70°	25.5	0.5
70°-80°	6.9	0.1
80°-90°	2.4	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	3740.7	72.3
0°-40°	4765.7	92.1
0°-60°	5142.2	99.3
0°-90°	5177.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	5177.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	7678	
5°	6970	631
15°	5036	1415
25°	3736	1694
35°	1588	1025
45°	354	287
55°	95	89
65°	24	25
75°	7	7
85°	4	2
90°	0	



TEST NUMBER: P585018

CATALOG NUMBER: HC855D010-HM82555935-81MDH

CANDELA DISTRIBUTION (FULL):

	0°
0°	7677.8
2.5°	7460.6
5°	6970.0
7.5°	6416.2
10°	5887.2
12.5°	5424.6
15°	5035.6
17.5°	4692.2
20°	4366.3
22.5°	4065.0
25°	3735.5
27.5°	3364.1
30°	2922.5
32.5°	2351.4
35°	1587.5
37.5°	988.2
40°	658.8
42.5°	473.0
45°	353.9
47.5°	259.4
50°	185.8
52.5°	129.6
55°	94.6
57.5°	63.1
60°	45.6
62.5°	31.5
65°	24.5
67.5°	17.5
70°	14.1
72.5°	7.0
75°	7.0
77.5°	3.5
80°	3.5
82.5°	3.5
85°	3.5
87.5°	0.0
90°	0.0



Report Generated By 670245859 / DESKTOP-HRDQ47P





— 0°-180°







(END OF REPORT)