

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: HALO COMMERCIAL

Report Number: P585060

Luminaire Tested: **HC860D010-HM86080827-81WDBB**

Issue Date: 10/21/2021

Test Information

Test Method: LM-41-14
Report Number: P585060
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2109-368-11)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 10/21/2021
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: HALO COMMERCIAL
Catalog Number: HC860D010-HM86080827-81WDBB
Description: HALO COMMERCIAL 8" ROUND, NEW CONSTRUCTION FRAME, WITH 8" WIDE DISTRIBUTION, BLACK BAFFLE TRIM
Light Source: (1) HIGH LUMEN LED 80CRI / 2700K CCT
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 5222.9 lumens
Efficiency: N/A
Efficacy: 93.3 lumens/watt
Spacing Criteria (0/90/45): 1.32 / 1.32 / 1.13
Luminous Opening: Circular (Dia: 0.67' x H: 0')
CIE Type: Direct


Input Watts (W): 56
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P585060

CATALOG NUMBER: HC860D010-HM86080827-81WDBB

Luminous Intensity Polar Plot

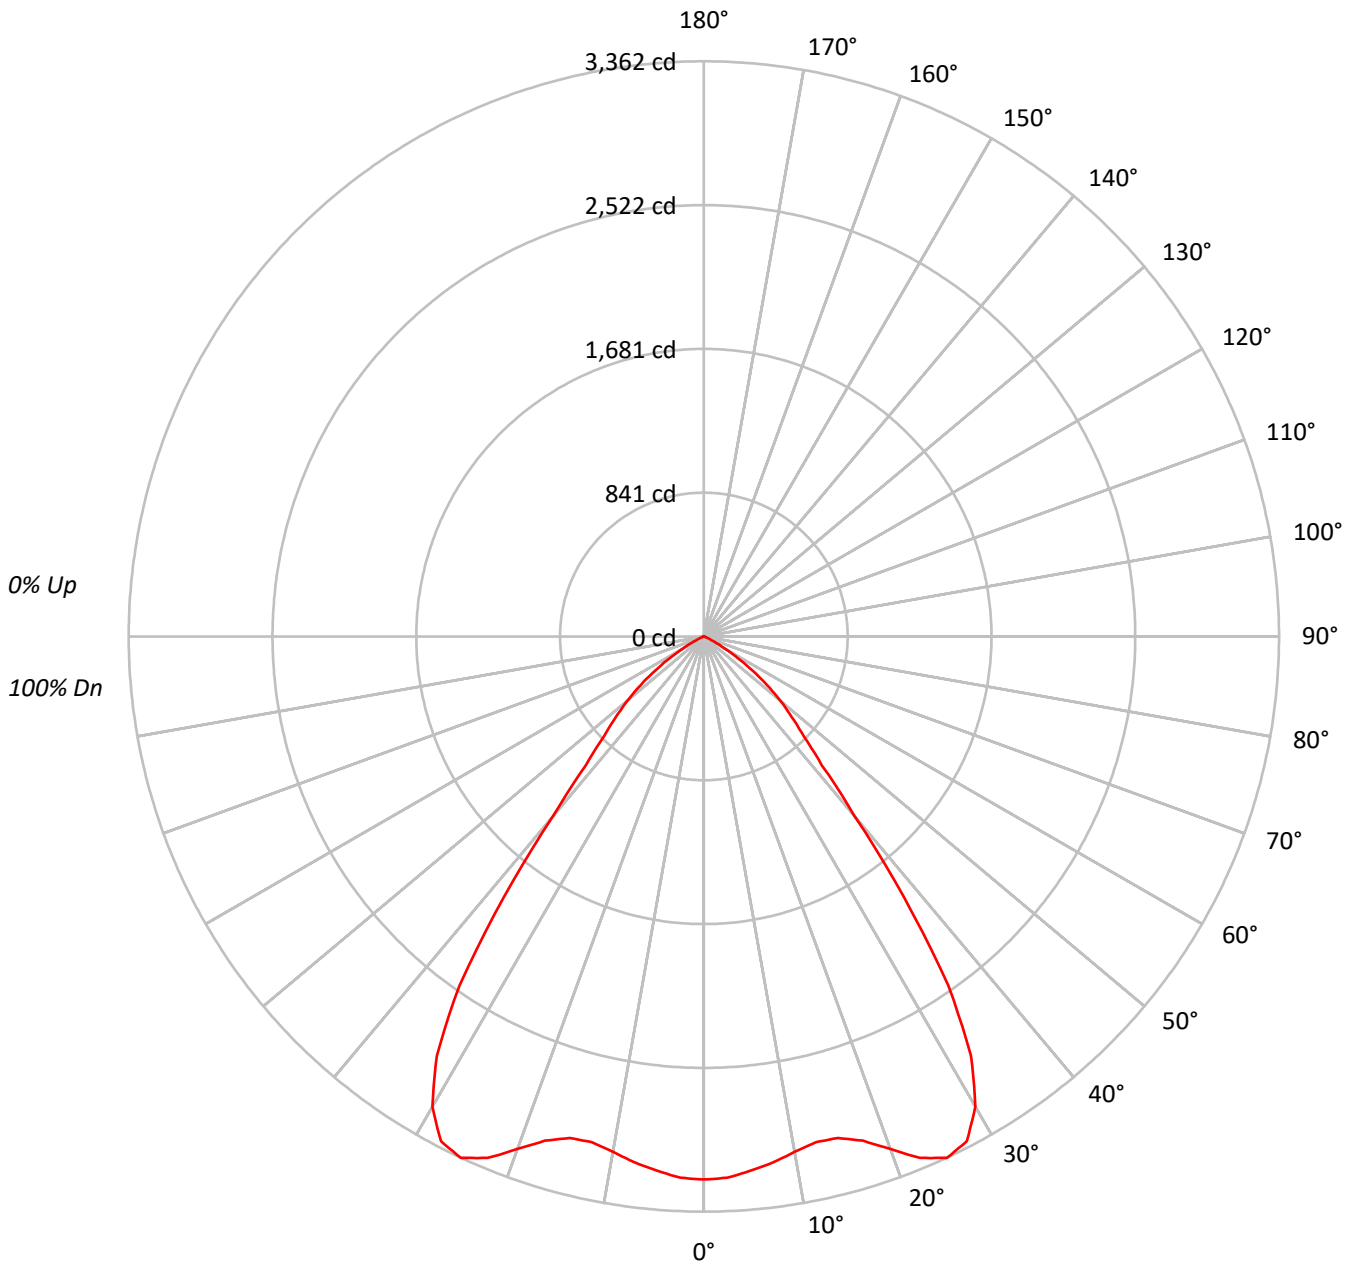



TEST NUMBER: P585060

CATALOG NUMBER: HC860D010-HM86080827-81WDBB

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			
1	113	109	107	104	110	107	105	102	103	101	99	99	98	96	96	95	93	92			
2	106	100	95	92	104	98	94	91	95	92	89	92	89	87	89	87	85	83			
3	99	92	86	81	97	90	85	81	88	83	79	85	81	78	83	80	77	75			
4	93	84	78	73	91	83	77	72	81	76	71	79	74	71	77	73	70	68			
5	87	77	71	66	85	76	70	65	74	69	65	73	68	64	71	67	63	62			
6	82	71	64	59	80	70	64	59	69	63	59	67	62	58	66	61	58	56			
7	77	66	59	54	75	65	59	54	64	58	54	63	57	53	61	57	53	51			
8	72	61	54	49	71	61	54	49	59	53	49	58	53	49	57	52	49	47			
9	68	57	50	45	67	56	50	45	55	49	45	54	49	45	53	48	45	43			
10	64	53	46	42	63	53	46	42	52	46	42	51	45	42	50	45	41	40			

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	97859
5°	97044
10°	95765
15°	96858
20°	104596
25°	114382
30°	112998
35°	93734
40°	55168
45°	36043
50°	27939
55°	18558
60°	9035
65°	2802
70°	947
75°	822
80°	622
85°	1238



TEST NUMBER: P585060

CATALOG NUMBER: HC860D010-HM86080827-81WDBB

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	296.9	5.7
10°-20°	871.6	16.7
20°-30°	1524.0	29.2
30°-40°	1482.4	28.4
40°-50°	674.2	12.9
50°-60°	312.6	6.0
60°-70°	52.4	1.0
70°-80°	6.4	0.1
80°-90°	2.4	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	2692.5	51.6
0°-40°	4175.0	79.9
0°-60°	5161.7	98.8
0°-90°	5222.9	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	5222.9	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	3174	
5°	3135	297
15°	3034	872
25°	3362	1524
35°	2490	1482
45°	826	674
55°	345	313
65°	38	52
75°	7	6
85°	4	2
90°	0	



TEST NUMBER: P585060

CATALOG NUMBER: HC860D010-HM86080827-81WDBB

CANDELA DISTRIBUTION (FULL):

	0°
0°	3173.5
2.5°	3166.5
5°	3135.1
7.5°	3100.2
10°	3058.4
12.5°	3027.0
15°	3034.0
17.5°	3089.7
20°	3187.4
22.5°	3299.1
25°	3361.8
27.5°	3326.9
30°	3173.5
32.5°	2905.0
35°	2490.0
37.5°	1918.0
40°	1370.5
42.5°	1021.8
45°	826.5
47.5°	697.5
50°	582.4
52.5°	463.8
55°	345.2
57.5°	237.1
60°	146.5
62.5°	80.2
65°	38.4
67.5°	17.4
70°	10.5
72.5°	6.9
75°	6.9
77.5°	3.5
80°	3.5
82.5°	3.5
85°	3.5
87.5°	0.0
90°	0.0



Report Generated By 670245859 / DESKTOP-HRDQ47P





— 0°-180°







(END OF REPORT)