

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: HALO COMMERCIAL

Report Number: P585072

Luminaire Tested: **HC860D010-HM86080830-81NDH**

Issue Date: 10/21/2021

Test Information

Test Method: LM-41-14
Report Number: P585072
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2109-368-2)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 10/21/2021
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: HALO COMMERCIAL
Catalog Number: HC860D010-HM86080830-81NDH
Description: HALO COMMERCIAL 8" ROUND, NEW CONSTRUCTION FRAME, WITH 8" NARROW DISTRIBUTION, HAZE TRIM
Light Source: (1) HIGH LUMEN LED 80CRI / 3000K CCT
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 4686.7 lumens
Efficiency: N/A
Efficacy: 83.7 lumens/watt
Spacing Criteria (0/90/45): 0.42 / 0.42 / 0.57
Luminous Opening: Circular (Dia: 0.67' x H: 0')
CIE Type: Direct


Input Watts (W): 56
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P585072

CATALOG NUMBER: HC860D010-HM86080830-81NDH

Luminous Intensity Polar Plot

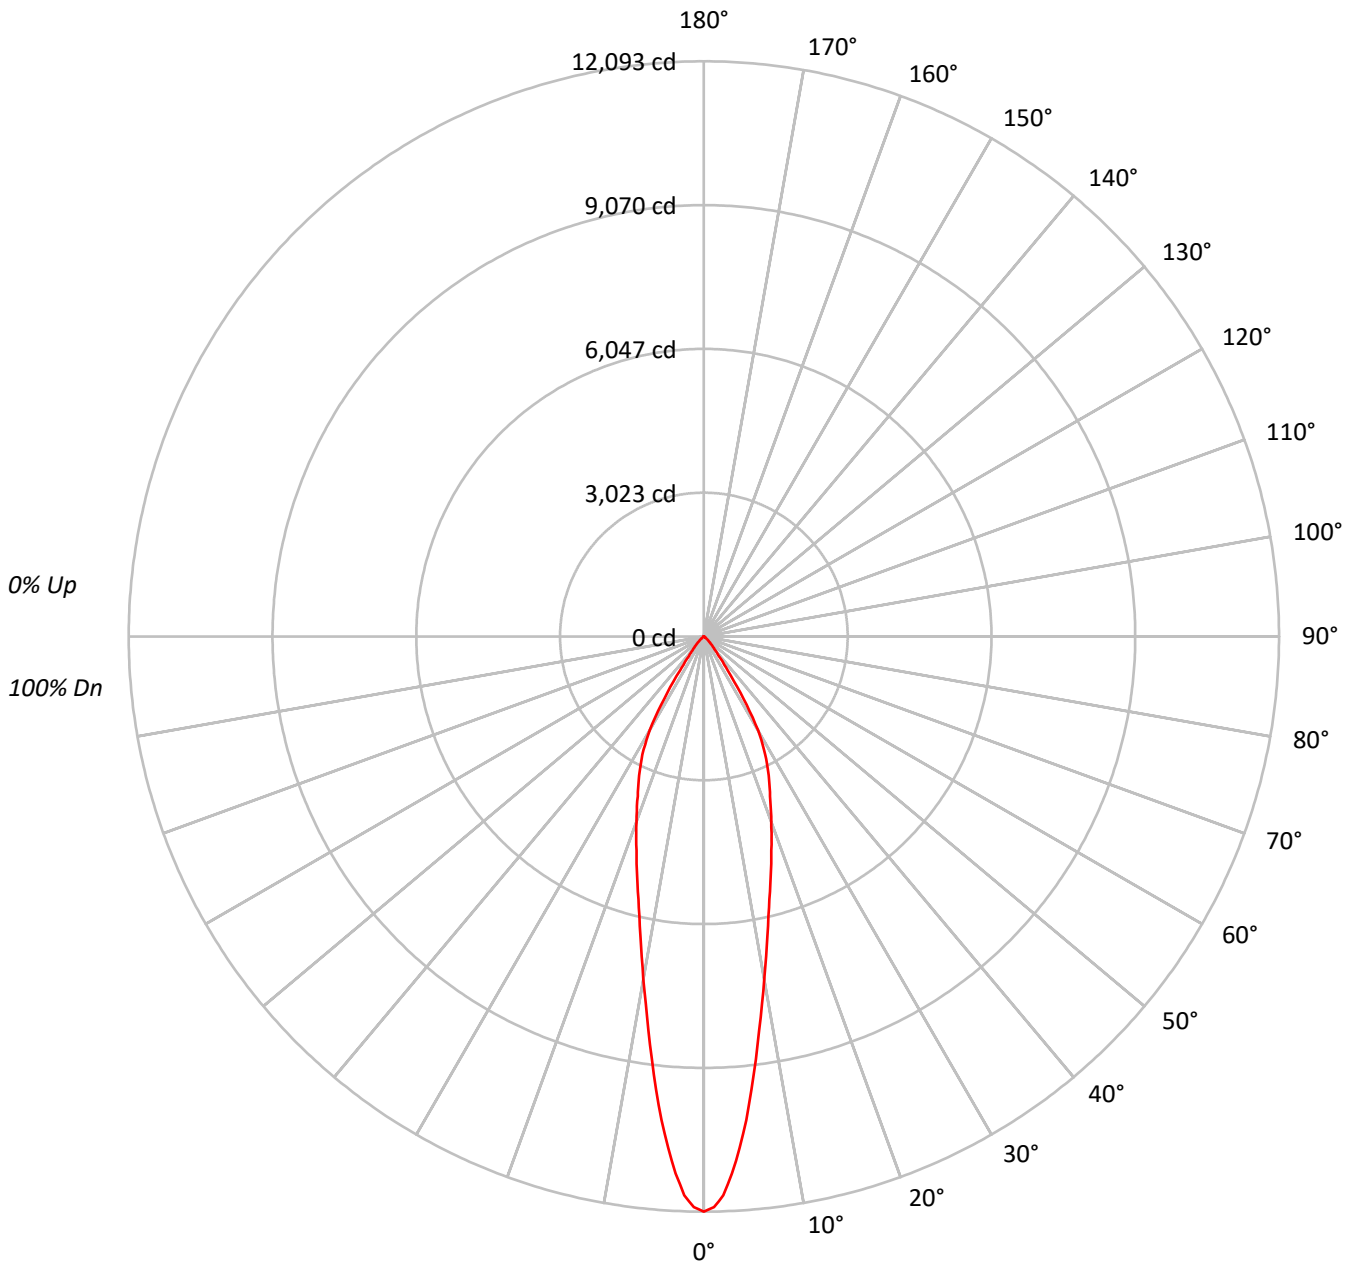



TEST NUMBER: P585072

CATALOG NUMBER: HC860D010-HM86080830-81NDH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	100	100	100
1	114	112	109	107	112	109	107	106	105	104	102	102	100	99	98	97	96	95	95	95	95
2	109	105	101	98	107	103	100	97	100	97	95	97	95	93	94	92	91	89	89	89	89
3	104	99	94	91	102	97	93	90	95	91	88	92	90	87	90	88	86	84	84	84	84
4	100	93	88	84	98	92	87	84	90	86	83	88	85	82	86	83	81	80	80	80	80
5	96	88	83	79	94	87	82	79	86	81	78	84	80	77	82	79	77	75	75	75	75
6	92	84	78	75	90	83	78	74	81	77	74	80	76	73	79	76	73	72	72	72	72
7	88	80	74	70	87	79	74	70	78	73	70	77	73	70	76	72	69	68	68	68	68
8	84	76	71	67	83	75	70	67	74	70	66	73	69	66	72	69	66	65	65	65	65
9	81	72	67	64	80	72	67	63	71	66	63	70	66	63	69	66	63	62	62	62	62
10	78	69	64	61	77	69	64	61	68	63	60	67	63	60	67	63	60	59	59	59	59

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	372916
5°	315939
10°	229226
15°	172144
20°	135826
25°	109561
30°	81190
35°	32893
40°	13872
45°	7440
50°	3344
55°	1688
60°	1073
65°	766
70°	622
75°	417
80°	622
85°	1238



TEST NUMBER: P585072

CATALOG NUMBER: HC860D010-HM86080830-81NDH

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	876.3	18.7
10°-20°	1514.5	32.3
20°-30°	1464.3	31.2
30°-40°	643.1	13.7
40°-50°	139.0	3.0
50°-60°	31.2	0.7
60°-70°	10.7	0.2
70°-80°	4.1	0.1
80°-90°	3.3	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	3855.1	82.3
0°-40°	4498.2	96.0
0°-60°	4668.5	99.6
0°-90°	4686.7	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	4686.7	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	12093	
5°	10207	876
15°	5392	1515
25°	3220	1464
35°	874	643
45°	171	139
55°	31	31
65°	10	11
75°	4	4
85°	4	3
90°	0	



TEST NUMBER: P585072

CATALOG NUMBER: HC860D010-HM86080830-81NDH

CANDELA DISTRIBUTION (FULL):

	0°
0°	12093.4
1°	12002.9
2°	11755.7
3°	11310.1
4°	10777.5
5°	10206.7
6°	9583.5
7°	8957.0
8°	8368.6
9°	7822.0
10°	7320.7
11°	6847.4
12°	6422.7
13°	6036.2
14°	5695.1
15°	5392.3
17.5°	4713.5
20°	4139.1
22.5°	3634.2
25°	3220.1
27.5°	2798.8
30°	2280.2
32.5°	1549.1
35°	873.8
37.5°	515.2
40°	344.6
42.5°	243.7
45°	170.6
47.5°	111.4
50°	69.7
52.5°	41.8
55°	31.4
57.5°	24.3
60°	17.4
62.5°	14.0
65°	10.5
67.5°	6.9
70°	6.9
72.5°	3.5
75°	3.5
77.5°	3.5
80°	3.5
82.5°	3.5



TEST NUMBER: P585072

CATALOG NUMBER: HC860D010-HM86080830-81NDH

CANDELA DISTRIBUTION (continued):

0°
90° | 0.0



Report Generated By 670245859 / DESKTOP-HRDQ47P





— 0°-180°







85°	3.5
87.5°	3.5



(END OF REPORT)