

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: HALO COMMERCIAL

Report Number: P585086

Luminaire Tested: **HC860D010-HM86080835-81MDH**

Issue Date: 10/21/2021

Test Information

Test Method: LM-41-14
Report Number: P585086
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2109-368-5)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 10/21/2021
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: HALO COMMERCIAL
Catalog Number: HC860D010-HM86080835-81MDH
Description: HALO COMMERCIAL 8" ROUND, NEW CONSTRUCTION FRAME, WITH 8" MEDIUM DISTRIBUTION, HAZE TRIM
Light Source: (1) HIGH LUMEN LED 80CRI / 3500K CCT
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 6148.8 lumens
Efficiency: N/A
Efficacy: 109.8 lumens/watt
Spacing Criteria (0/90/45): 0.68 / 0.68 / 0.81
Luminous Opening: Circular (Dia: 0.67' x H: 0')
CIE Type: Direct


Input Watts (W): 56
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P585086

CATALOG NUMBER: HC860D010-HM86080835-81MDH

Luminous Intensity Polar Plot

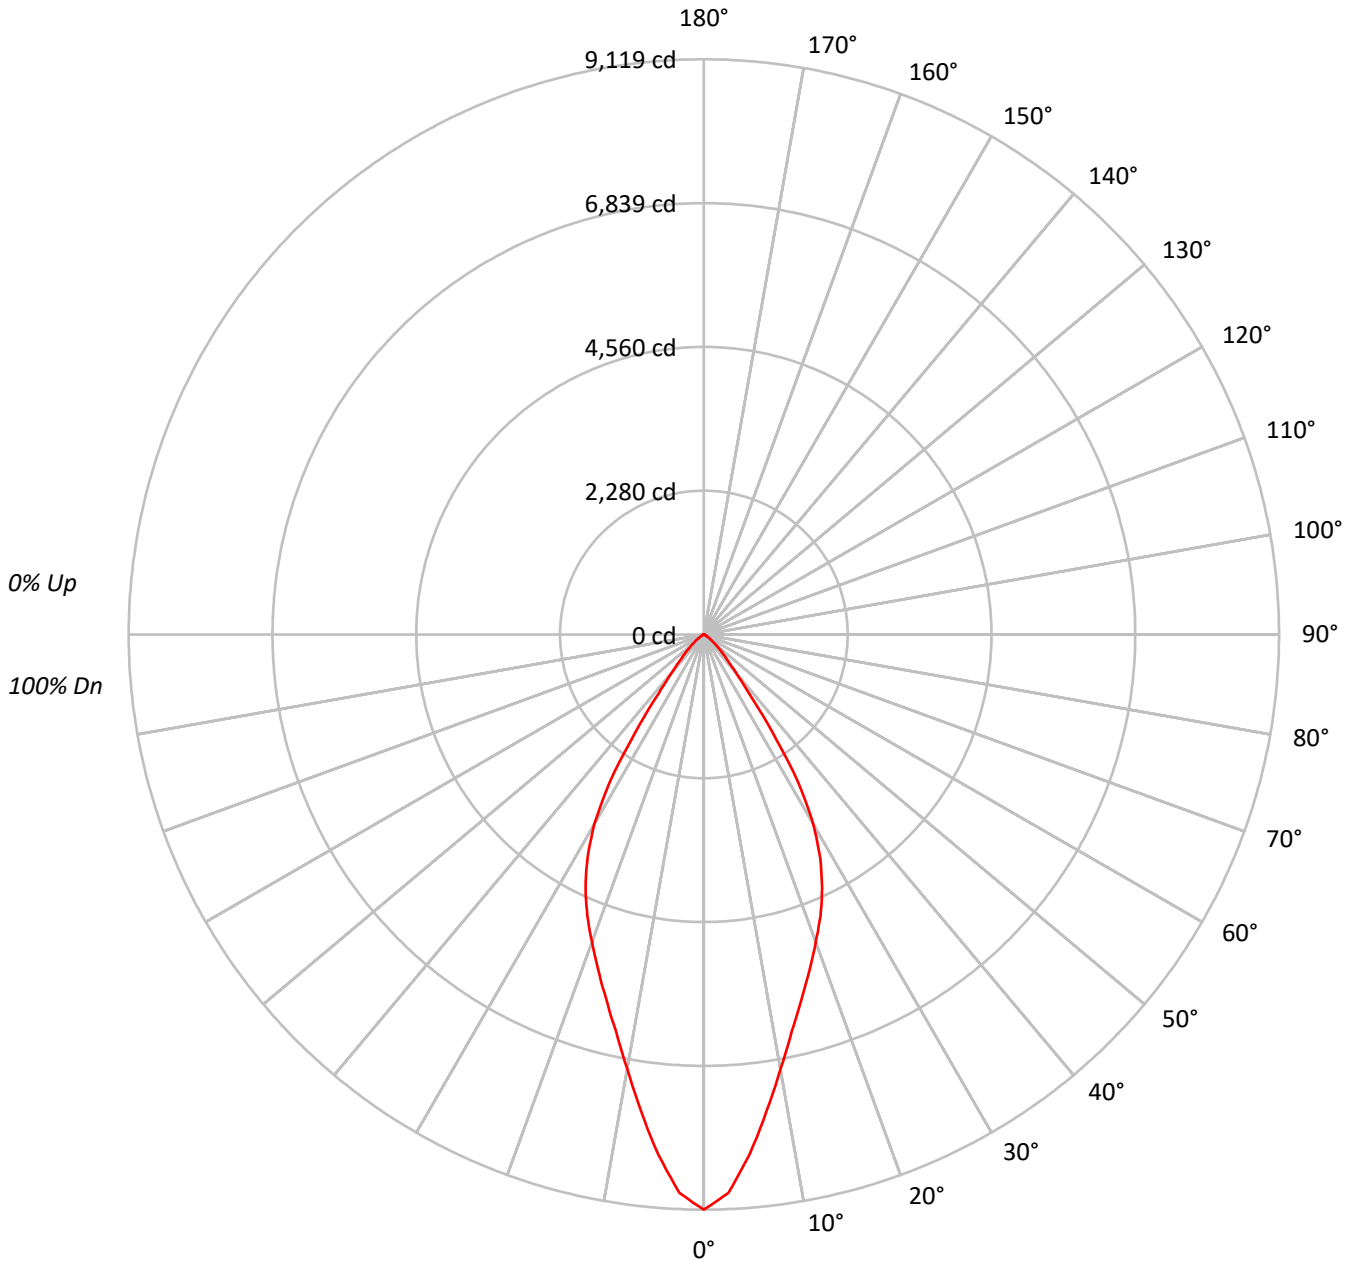



TEST NUMBER: P585086

CATALOG NUMBER: HC860D010-HM86080835-81MDH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			
1	114	111	108	106	111	109	106	104	105	103	101	101	99	98	97	96	95	94			
2	108	103	99	96	106	101	98	95	98	95	93	95	93	91	92	90	89	87			
3	103	96	91	87	101	95	90	87	92	88	85	90	87	84	88	85	83	81			
4	97	90	85	80	96	89	84	80	87	82	79	85	81	78	83	80	77	76			
5	93	84	79	74	91	83	78	74	82	77	73	80	76	73	78	75	72	71			
6	88	79	73	69	87	78	73	69	77	72	68	76	71	68	74	70	67	66			
7	84	75	69	64	82	74	68	64	73	68	64	71	67	64	70	66	63	62			
8	80	70	64	60	79	70	64	60	69	64	60	68	63	60	67	63	60	58			
9	76	67	61	57	75	66	61	57	65	60	56	64	60	56	63	59	56	55			
10	73	63	57	54	72	63	57	53	62	57	53	61	56	53	60	56	53	52			

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	281199
5°	256250
10°	218943
15°	190938
20°	170177
25°	150958
30°	123598
35°	70978
40°	31499
45°	18333
50°	10583
55°	6037
60°	3336
65°	2131
70°	1497
75°	989
80°	746
85°	1486



TEST NUMBER: P585086

CATALOG NUMBER: HC860D010-HM86080835-81MDH

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	749.4	12.2
10°-20°	1681.2	27.3
20°-30°	2012.4	32.7
30°-40°	1217.4	19.8
40°-50°	341.2	5.5
50°-60°	106.0	1.7
60°-70°	30.3	0.5
70°-80°	8.2	0.1
80°-90°	2.9	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	4442.9	72.3
0°-40°	5660.4	92.1
0°-60°	6107.5	99.3
0°-90°	6148.8	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	6148.8	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	9119	
5°	8278	749
15°	5981	1681
25°	4437	2012
35°	1886	1217
45°	420	341
55°	112	106
65°	29	30
75°	8	8
85°	4	3
90°	0	



TEST NUMBER: P585086

CATALOG NUMBER: HC860D010-HM86080835-81MDH

CANDELA DISTRIBUTION (FULL):

	0°
0°	9119.1
2.5°	8861.1
5°	8278.4
7.5°	7620.7
10°	6992.3
12.5°	6442.9
15°	5981.0
17.5°	5573.0
20°	5185.9
22.5°	4828.0
25°	4436.8
27.5°	3995.6
30°	3471.2
32.5°	2792.7
35°	1885.5
37.5°	1173.7
40°	782.5
42.5°	561.9
45°	420.4
47.5°	308.0
50°	220.6
52.5°	154.0
55°	112.3
57.5°	75.0
60°	54.1
62.5°	37.5
65°	29.2
67.5°	20.8
70°	16.6
72.5°	8.3
75°	8.3
77.5°	4.2
80°	4.2
82.5°	4.2
85°	4.2
87.5°	0.0
90°	0.0



Report Generated By 670245859 / DESKTOP-HRDQ47P





— 0°-180°







(END OF REPORT)