

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: HALO COMMERCIAL

Report Number: P593875

Luminaire Tested: **HC860D010-HM86080950-81MDH**

Issue Date: 10/21/2021

Test Information

Test Method: LM-41-14
Report Number: P593875
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2109-368-5)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 10/21/2021
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: HALO COMMERCIAL
Catalog Number: HC860D010-HM86080950-81MDH
Description: HALO COMMERCIAL 8" ROUND, NEW CONSTRUCTION FRAME, WITH 8" MEDIUM DISTRIBUTION, HAZE TRIM
Light Source: (1) HIGH LUMEN LED 90CRI / 5000K CCT
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 5627.6 lumens
Efficiency: N/A
Efficacy: 100.5 lumens/watt
Spacing Criteria (0/90/45): 0.68 / 0.68 / 0.81
Luminous Opening: Circular (Dia: 0.67' x H: 0')
CIE Type: Direct


Input Watts (W): 56
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P593875

CATALOG NUMBER: HC860D010-HM86080950-81MDH

Luminous Intensity Polar Plot

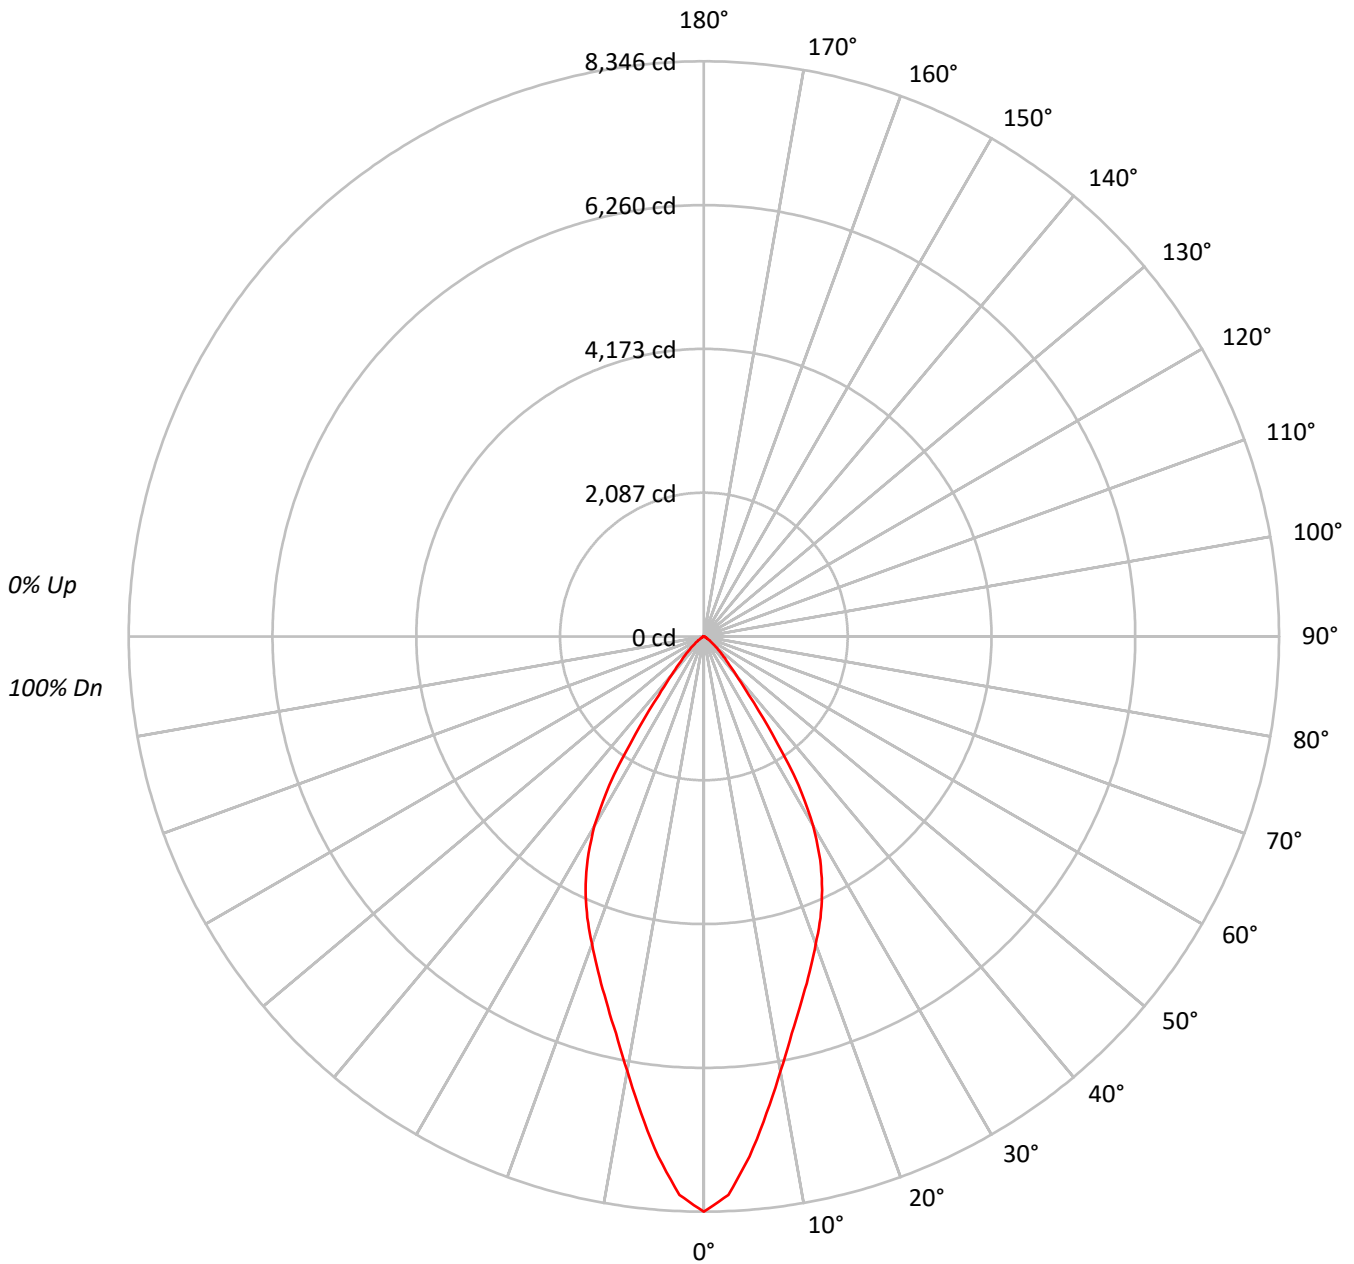



TEST NUMBER: P593875

CATALOG NUMBER: HC860D010-HM86080950-81MDH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			
1	114	111	108	106	111	109	106	104	105	103	101	101	99	98	97	96	95	94			
2	108	103	99	96	106	101	98	95	98	95	93	95	93	91	92	90	89	87			
3	103	96	91	87	101	95	90	87	92	88	85	90	87	84	88	85	83	81			
4	97	90	85	80	96	89	84	80	87	82	79	85	81	78	83	80	77	76			
5	93	84	79	74	91	83	78	74	82	77	73	80	76	73	78	75	72	71			
6	88	79	73	69	87	78	73	69	77	72	68	76	71	68	74	70	67	66			
7	84	75	69	64	82	74	68	64	73	68	64	71	67	64	70	66	63	62			
8	80	70	64	60	79	70	64	60	69	64	60	68	63	60	67	63	60	58			
9	76	67	61	57	75	66	61	57	65	60	57	64	60	56	63	59	56	55			
10	73	63	57	54	72	63	57	53	62	57	53	61	56	53	60	56	53	52			

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	257366
5°	234533
10°	200384
15°	174753
20°	155758
25°	138165
30°	113119
35°	64959
40°	28826
45°	16781
50°	9681
55°	5532
60°	3053
65°	1941
70°	1370
75°	905
80°	675
85°	1344



TEST NUMBER: P593875

CATALOG NUMBER: HC860D010-HM86080950-81MDH

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	685.8	12.2
10°-20°	1538.7	27.3
20°-30°	1841.8	32.7
30°-40°	1114.2	19.8
40°-50°	312.3	5.5
50°-60°	96.9	1.7
60°-70°	27.6	0.5
70°-80°	7.5	0.1
80°-90°	2.6	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	4066.4	72.3
0°-40°	5180.6	92.1
0°-60°	5589.8	99.3
0°-90°	5627.6	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	5627.6	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	8346	
5°	7577	686
15°	5474	1539
25°	4061	1842
35°	1726	1114
45°	385	312
55°	103	97
65°	27	28
75°	8	7
85°	4	3
90°	0	



TEST NUMBER: P593875

CATALOG NUMBER: HC860D010-HM86080950-81MDH

CANDELA DISTRIBUTION (FULL):

0°	
0°	8346.2
2.5°	8110.0
5°	7576.8
7.5°	6974.8
10°	6399.6
12.5°	5896.9
15°	5474.0
17.5°	5100.7
20°	4746.5
22.5°	4418.8
25°	4060.8
27.5°	3657.0
30°	3176.9
32.5°	2556.0
35°	1725.6
37.5°	1074.3
40°	716.1
42.5°	514.3
45°	384.8
47.5°	281.9
50°	201.8
52.5°	140.9
55°	102.9
57.5°	68.5
60°	49.5
62.5°	34.3
65°	26.6
67.5°	19.0
70°	15.2
72.5°	7.6
75°	7.6
77.5°	3.8
80°	3.8
82.5°	3.8
85°	3.8
87.5°	0.0
90°	0.0



Report Generated By 670245859 / DESKTOP-HRDQ47P





— 0°-180°







(END OF REPORT)