

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: HALO COMMERCIAL

Report Number: P583560

Luminaire Tested: **HC807D010-HM80520827-81MDH**

Issue Date: 10/21/2021

Test Information

Test Method: LM-41-14
Report Number: P583560
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2109-368-5)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 10/21/2021
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: HALO COMMERCIAL
Catalog Number: HC807D010-HM80520827-81MDH
Description: HALO COMMERCIAL 8" ROUND, NEW CONSTRUCTION FRAME, WITH 8" MEDIUM DISTRIBUTION, HAZE TRIM
Light Source: (1) HIGH LUMEN LED 80CRI / 2700K CCT
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 924.3 lumens
Efficiency: N/A
Efficacy: 115.5 lumens/watt
Spacing Criteria (0/90/45): 0.68 / 0.68 / 0.81
Luminous Opening: Circular (Dia: 0.67' x H: 0')
CIE Type: Direct


Input Watts (W): 8
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P583560

CATALOG NUMBER: HC807D010-HM80520827-81MDH

Luminous Intensity Polar Plot

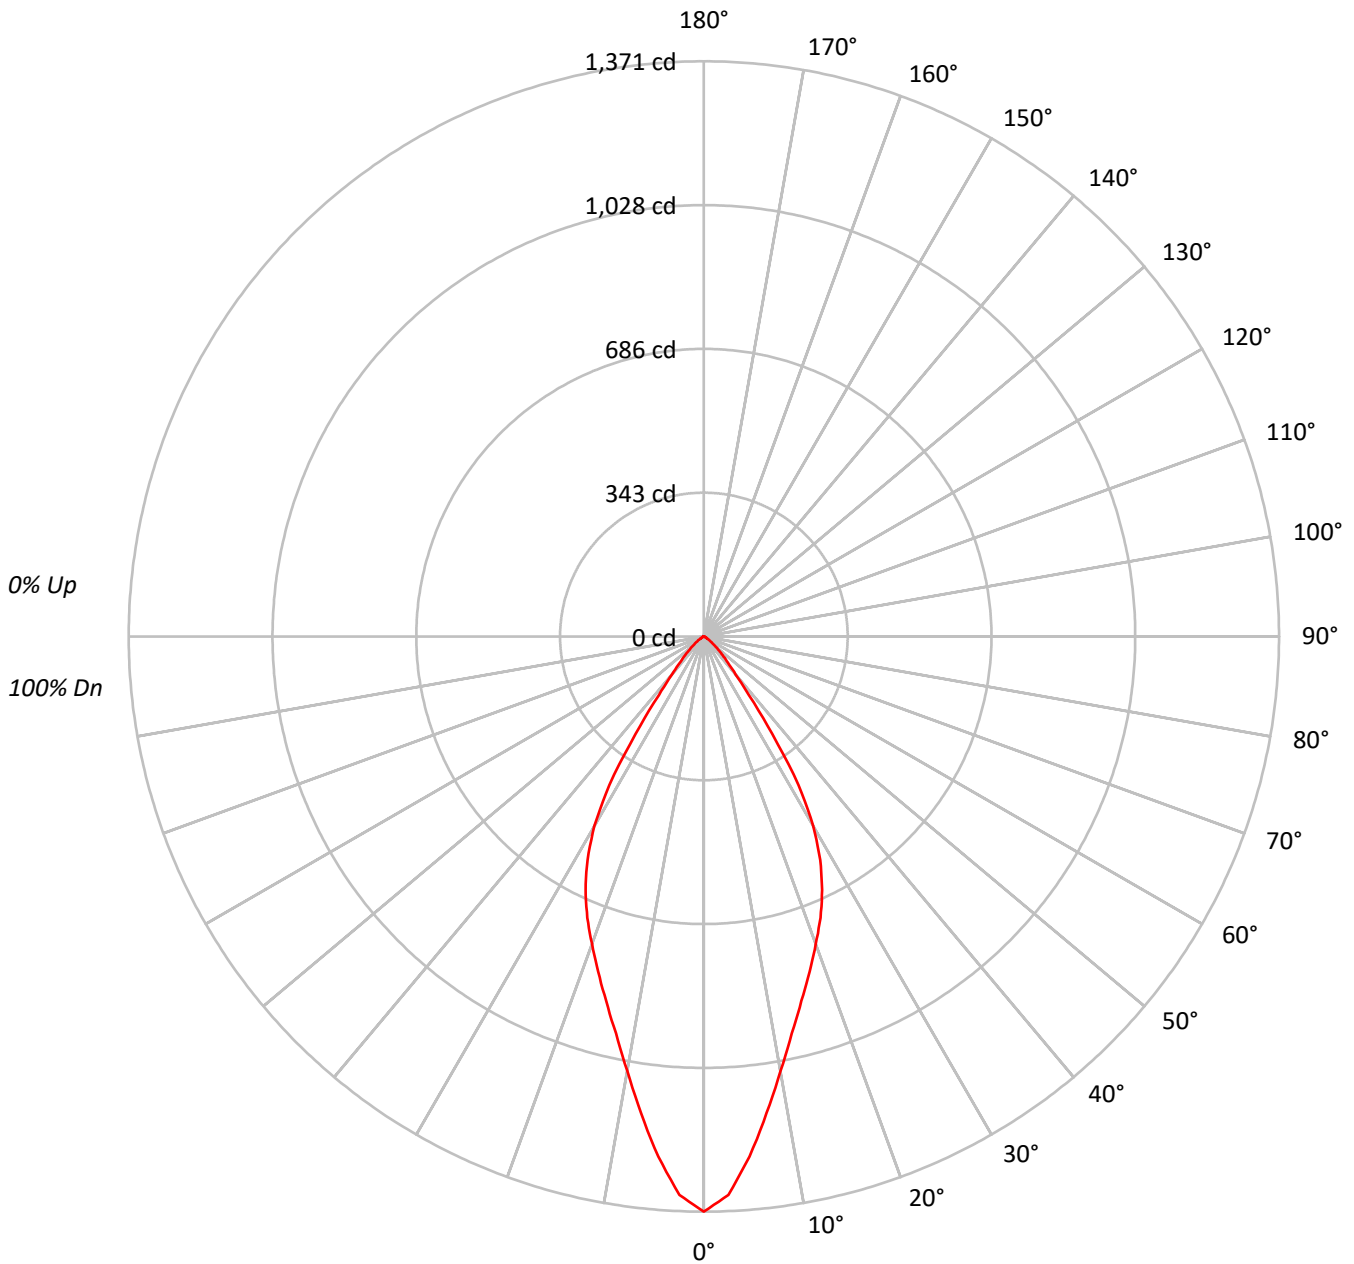



TEST NUMBER: P583560

CATALOG NUMBER: HC807D010-HM80520827-81MDH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			
1	114	111	108	106	111	109	106	104	105	103	101	101	99	98	97	96	95	94			
2	108	103	99	96	106	101	98	95	98	95	93	95	93	91	92	91	89	87			
3	103	96	91	87	101	95	90	87	92	88	85	90	87	84	88	85	83	81			
4	97	90	85	80	96	89	84	80	87	82	79	85	81	78	83	80	77	76			
5	93	84	79	74	91	83	78	74	82	77	73	80	76	73	78	75	72	71			
6	88	79	73	69	87	78	73	69	77	72	68	76	71	68	74	70	67	66			
7	84	75	69	65	82	74	68	64	73	68	64	71	67	64	70	66	63	62			
8	80	70	64	60	79	70	64	60	69	64	60	68	63	60	67	63	60	58			
9	76	67	61	57	75	66	61	57	65	60	57	64	60	56	63	59	56	55			
10	73	63	57	54	72	63	57	53	62	57	53	61	56	53	60	56	53	52			

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	42274
5°	38525
10°	32915
15°	28703
20°	25583
25°	22694
30°	18583
35°	10672
40°	4734
45°	2756
50°	1593
55°	903
60°	500
65°	321
70°	225
75°	143
80°	107
85°	212



TEST NUMBER: P583560

CATALOG NUMBER: HC807D010-HM80520827-81MDH

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	112.7	12.2
10°-20°	252.7	27.3
20°-30°	302.5	32.7
30°-40°	183.0	19.8
40°-50°	51.3	5.5
50°-60°	15.9	1.7
60°-70°	4.5	0.5
70°-80°	1.2	0.1
80°-90°	0.4	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	667.9	72.3
0°-40°	851.0	92.1
0°-60°	918.1	99.3
0°-90°	924.3	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	924.3	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1371	
5°	1245	113
15°	899	253
25°	667	303
35°	284	183
45°	63	51
55°	17	16
65°	4	5
75°	1	1
85°	1	0
90°	0	



TEST NUMBER: P583560

CATALOG NUMBER: HC807D010-HM80520827-81MDH

CANDELA DISTRIBUTION (FULL):

0°	
0°	1370.9
2.5°	1332.2
5°	1244.6
7.5°	1145.6
10°	1051.2
12.5°	968.7
15°	899.1
17.5°	837.8
20°	779.6
22.5°	725.8
25°	667.0
27.5°	600.7
30°	521.9
32.5°	419.8
35°	283.5
37.5°	176.5
40°	117.6
42.5°	84.5
45°	63.2
47.5°	46.2
50°	33.2
52.5°	23.2
55°	16.8
57.5°	11.2
60°	8.1
62.5°	5.6
65°	4.4
67.5°	3.1
70°	2.5
72.5°	1.2
75°	1.2
77.5°	0.6
80°	0.6
82.5°	0.6
85°	0.6
87.5°	0.0
90°	0.0



Report Generated By 670245859 / DESKTOP-HRDQ47P





— 0°-180°







(END OF REPORT)