

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: HALO COMMERCIAL

Report Number: P593482

Luminaire Tested: **HC807D010-HM80520850-81WDBB**

Issue Date: 10/21/2021

Test Information

Test Method: LM-41-14
Report Number: P593482
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2109-368-11)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 10/21/2021
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: HALO COMMERCIAL
Catalog Number: HC807D010-HM80520850-81WDBB
Description: HALO COMMERCIAL 8" ROUND, NEW CONSTRUCTION FRAME, WITH 8" WIDE DISTRIBUTION, BLACK BAFFLE TRIM
Light Source: (1) HIGH LUMEN LED 80CRI / 5000K CCT
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1042.3 lumens
Efficiency: N/A
Efficacy: 130.3 lumens/watt
Spacing Criteria (0/90/45): 1.32 / 1.32 / 1.13
Luminous Opening: Circular (Dia: 0.67' x H: 0')
CIE Type: Direct


Input Watts (W): 8
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P593482

CATALOG NUMBER: HC807D010-HM80520850-81WDBB

Luminous Intensity Polar Plot

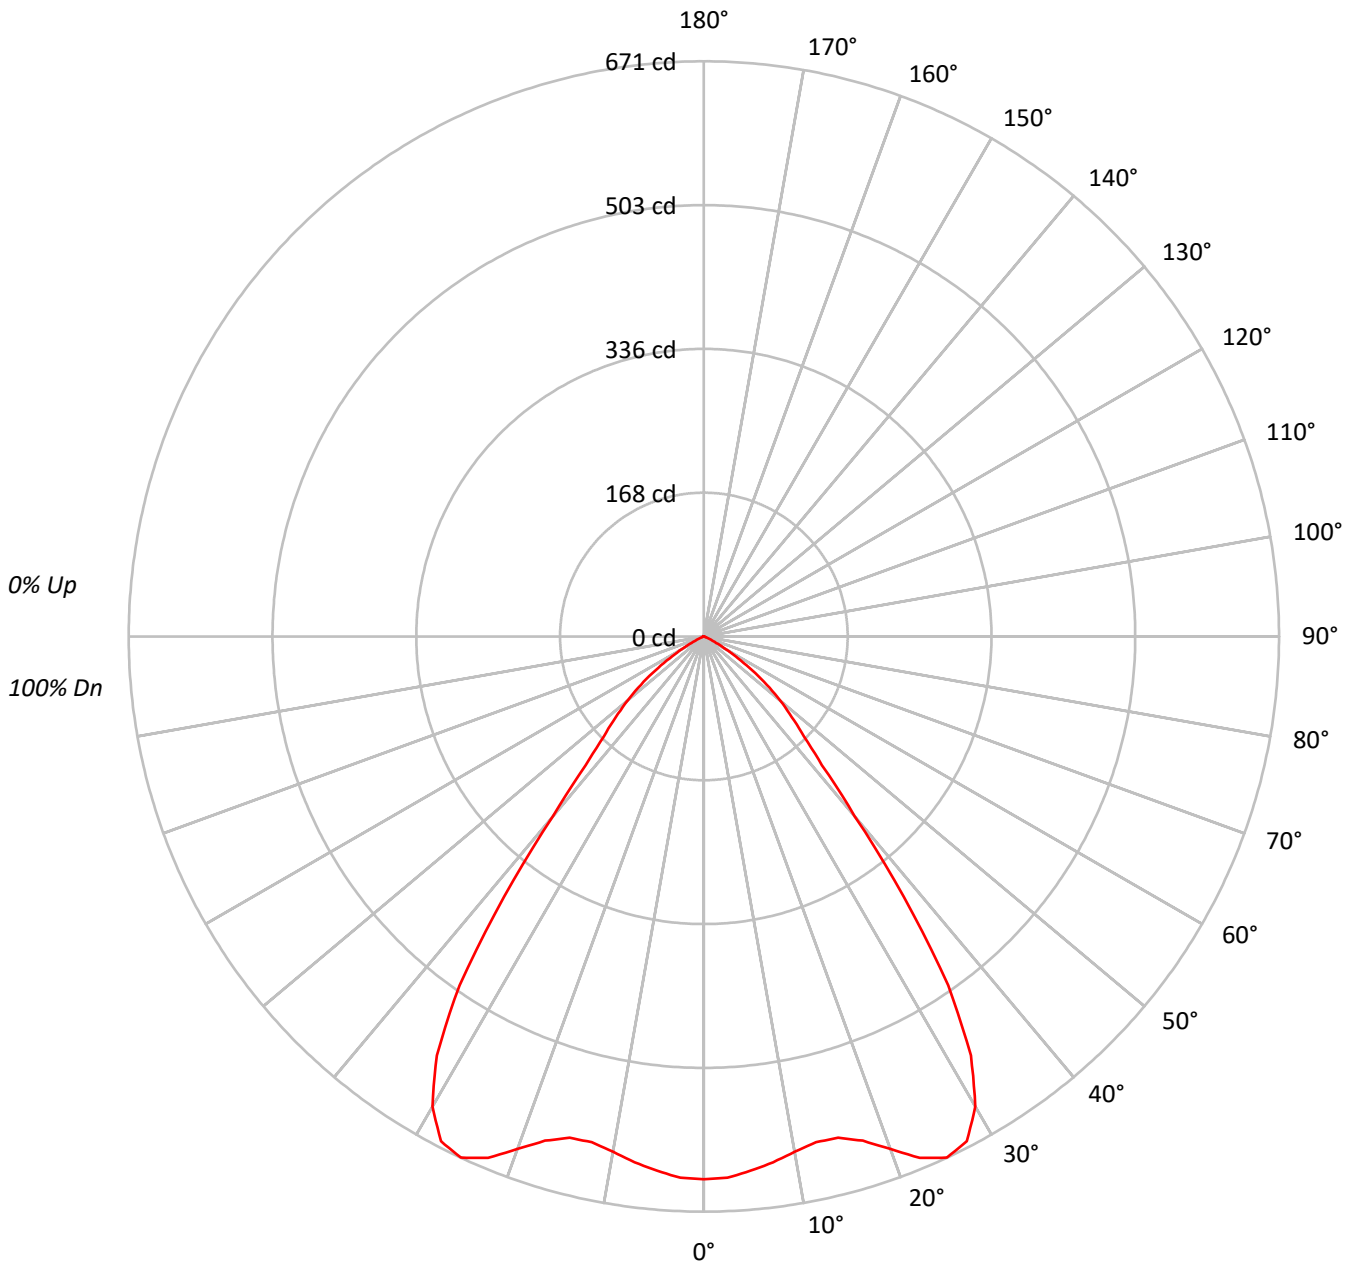



TEST NUMBER: P593482

CATALOG NUMBER: HC807D010-HM80520850-81WDBB

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			
1	113	109	107	104	110	107	105	102	103	101	99	99	98	96	96	95	93	92			
2	106	100	95	92	104	98	94	91	95	92	89	92	89	87	89	87	85	83			
3	99	92	86	81	97	90	85	81	88	83	79	85	81	78	83	80	77	75			
4	93	84	78	73	91	83	77	72	81	76	71	79	74	71	77	73	70	68			
5	87	77	71	66	85	76	70	65	74	69	65	73	68	64	71	67	63	62			
6	82	71	64	59	80	70	64	59	69	63	59	67	62	58	66	61	58	56			
7	77	66	59	54	75	65	59	54	64	58	54	63	57	53	61	57	53	51			
8	72	61	54	49	71	61	54	49	59	53	49	58	53	49	57	52	49	47			
9	68	57	50	45	67	56	50	45	55	49	45	54	49	45	53	48	45	43			
10	64	53	46	42	63	53	46	42	52	46	42	51	45	42	50	45	41	40			

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	19526
5°	19365
10°	19110
15°	19327
20°	20874
25°	22827
30°	22546
35°	18705
40°	11009
45°	7191
50°	5579
55°	3710
60°	1807
65°	555
70°	180
75°	167
80°	124
85°	248



TEST NUMBER: P593482

CATALOG NUMBER: HC807D010-HM80520850-81WDBB

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	59.2	5.7
10°-20°	173.9	16.7
20°-30°	304.1	29.2
30°-40°	295.8	28.4
40°-50°	134.5	12.9
50°-60°	62.4	6.0
60°-70°	10.4	1.0
70°-80°	1.3	0.1
80°-90°	0.5	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	537.3	51.6
0°-40°	833.1	79.9
0°-60°	1030.1	98.8
0°-90°	1042.3	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1042.3	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	633	
5°	626	59
15°	605	174
25°	671	304
35°	497	296
45°	165	135
55°	69	62
65°	8	10
75°	1	1
85°	1	0
90°	0	



TEST NUMBER: P593482

CATALOG NUMBER: HC807D010-HM80520850-81WDBB

CANDELA DISTRIBUTION (FULL):

	0°
0°	633.2
2.5°	631.9
5°	625.6
7.5°	618.7
10°	610.3
12.5°	604.1
15°	605.4
17.5°	616.6
20°	636.1
22.5°	658.3
25°	670.9
27.5°	663.9
30°	633.2
32.5°	579.7
35°	496.9
37.5°	382.8
40°	273.5
42.5°	203.9
45°	164.9
47.5°	139.2
50°	116.3
52.5°	92.6
55°	69.0
57.5°	47.3
60°	29.3
62.5°	16.0
65°	7.6
67.5°	3.5
70°	2.0
72.5°	1.4
75°	1.4
77.5°	0.7
80°	0.7
82.5°	0.7
85°	0.7
87.5°	0.0
90°	0.0



Report Generated By 670245859 / DESKTOP-HRDQ47P





— 0°-180°







(END OF REPORT)