

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: HALO COMMERCIAL

Report Number: P583644

Luminaire Tested: **HC807D010-HM80520930-81MDC**

Issue Date: 10/21/2021

Test Information

Test Method: LM-41-14
Report Number: P583644
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2109-368-4)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 10/21/2021
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: HALO COMMERCIAL
Catalog Number: HC807D010-HM80520930-81MDC
Description: HALO COMMERCIAL 8" ROUND, NEW CONSTRUCTION FRAME, WITH 8" MEDIUM DISTRIBUTION, SPECULAR TRIM
Light Source: (1) HIGH LUMEN LED 90CRI / 3000K CCT
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 909.5 lumens
Efficiency: N/A
Efficacy: 113.7 lumens/watt
Spacing Criteria (0/90/45): 0.58 / 0.58 / 0.67
Luminous Opening: Circular (Dia: 0.67' x H: 0')
CIE Type: Direct


Input Watts (W): 8
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P583644

CATALOG NUMBER: HC807D010-HM80520930-81MDC

Luminous Intensity Polar Plot

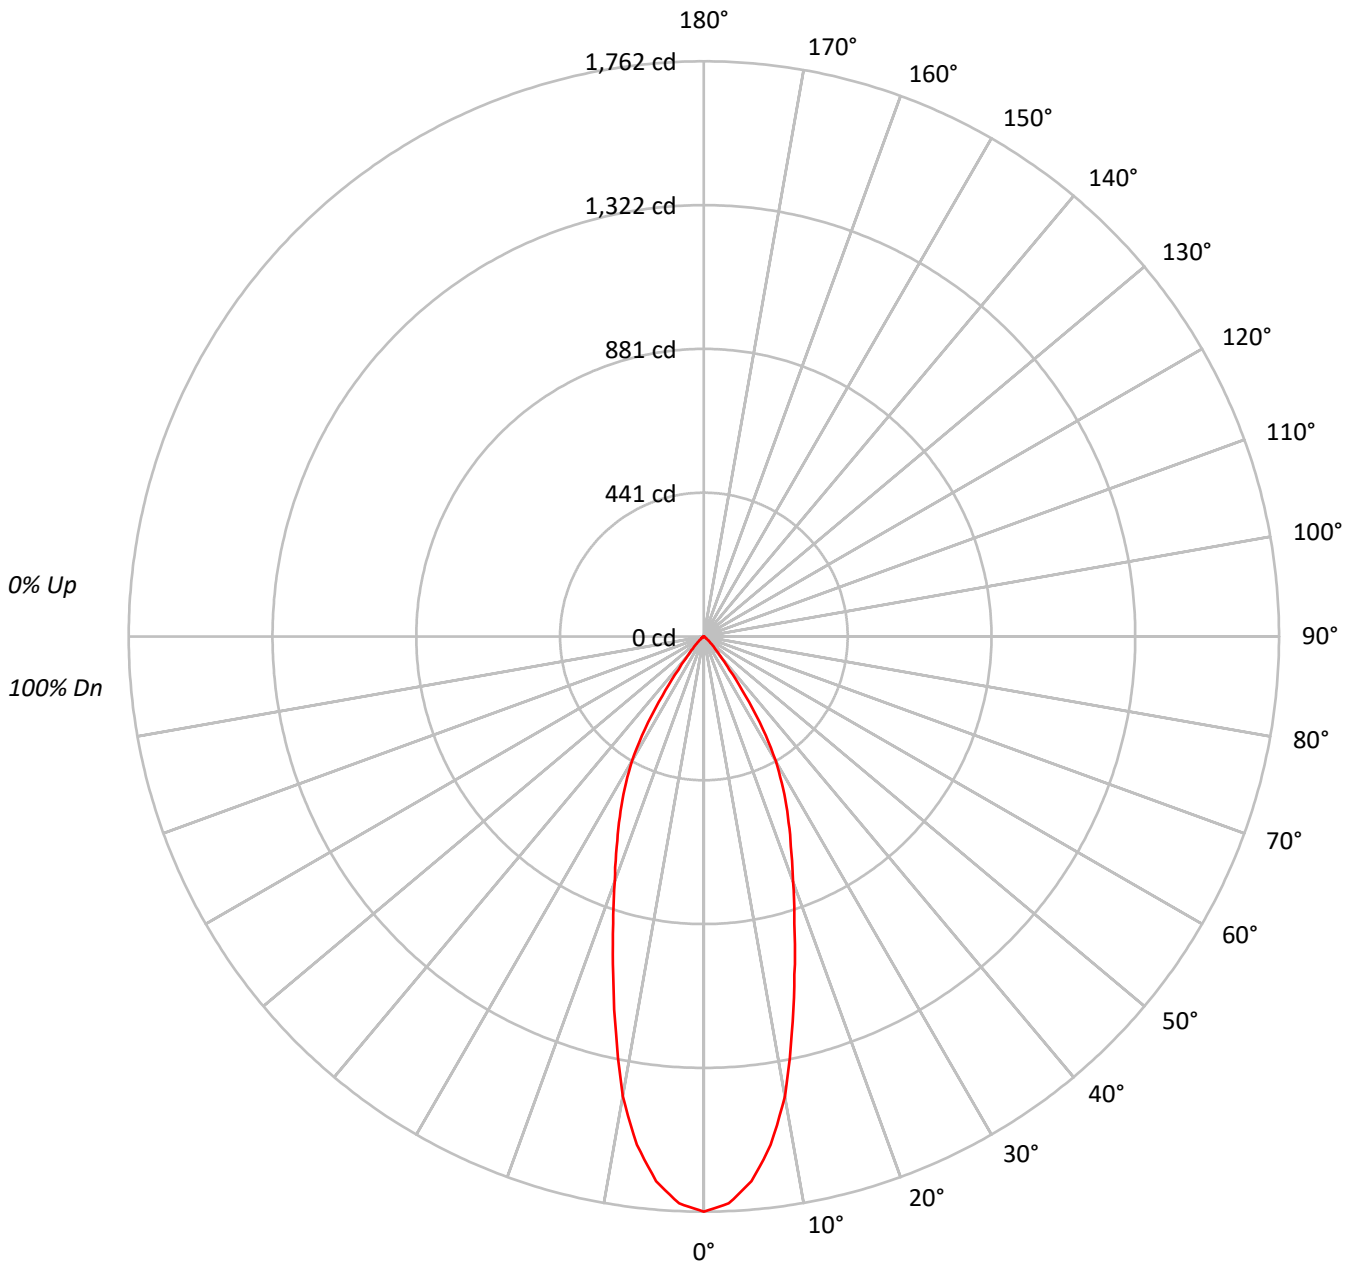



TEST NUMBER: P583644

CATALOG NUMBER: HC807D010-HM80520930-81MDC

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			
1	114	111	109	107	112	109	107	105	105	104	102	102	100	99	98	97	96	95			
2	109	105	101	98	107	103	100	97	100	97	95	97	95	93	94	92	91	89			
3	104	98	94	90	102	97	93	90	94	91	88	92	89	87	90	87	85	84			
4	100	93	88	84	98	92	87	83	90	86	82	88	84	82	86	83	81	79			
5	95	88	82	78	94	87	82	78	85	81	77	83	80	77	82	79	76	75			
6	91	83	78	74	90	82	77	73	81	76	73	79	76	73	78	75	72	71			
7	87	79	73	70	86	78	73	69	77	72	69	76	72	69	75	71	68	67			
8	84	75	70	66	82	74	69	66	73	69	65	72	68	65	71	68	65	64			
9	80	71	66	62	79	71	66	62	70	65	62	69	65	62	68	65	62	61			
10	77	68	63	59	76	68	63	59	67	62	59	66	62	59	65	62	59	58			

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	54337
5°	51845
10°	44761
15°	34229
20°	26187
25°	20721
30°	15649
35°	8327
40°	3172
45°	1522
50°	648
55°	269
60°	105
65°	80
70°	54
75°	0
80°	0
85°	0



TEST NUMBER: P583644

CATALOG NUMBER: HC807D010-HM80520930-81MDC

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	152.0	16.7
10°-20°	299.3	32.9
20°-30°	278.8	30.7
30°-40°	143.8	15.8
40°-50°	29.3	3.2
50°-60°	5.0	0.6
60°-70°	1.0	0.1
70°-80°	0.2	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	730.1	80.3
0°-40°	873.9	96.1
0°-60°	908.3	99.9
0°-90°	909.5	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	909.5	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1762	
5°	1675	152
15°	1072	299
25°	609	279
35°	221	144
45°	35	29
55°	5	5
65°	1	1
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P583644

CATALOG NUMBER: HC807D010-HM80520930-81MDC

CANDELA DISTRIBUTION (FULL):

	0°
0°	1762.1
2.5°	1738.5
5°	1674.9
7.5°	1570.2
10°	1429.5
12.5°	1245.0
15°	1072.2
17.5°	922.4
20°	798.0
22.5°	696.8
25°	609.0
27.5°	525.7
30°	439.5
32.5°	337.1
35°	221.2
37.5°	128.3
40°	78.8
42.5°	51.7
45°	34.9
47.5°	22.0
50°	13.5
52.5°	7.9
55°	5.0
57.5°	2.3
60°	1.7
62.5°	1.1
65°	1.1
67.5°	0.6
70°	0.6
72.5°	0.6
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By 670245859 / DESKTOP-HRDQ47P





— 0°-180°







(END OF REPORT)