

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: HALO COMMERCIAL

Report Number: P583674

Luminaire Tested: **HC807D010-HM80520935-81WDWB**

Issue Date: 10/21/2021

**Test Information**

Test Method: LM-41-14  
Report Number: P583674  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2109-368-10)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 10/21/2021  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: HALO COMMERCIAL  
Catalog Number: HC807D010-HM80520935-81WDWB  
Description: HALO COMMERCIAL 8" ROUND, NEW CONSTRUCTION FRAME, WITH 8" WIDE DISTRIBUTION, WHITE BAFFLE TRIM  
Light Source: (1) HIGH LUMEN LED 90CRI / 3500K CCT  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 978.8 lumens  
Efficiency: N/A  
Efficacy: 122.4 lumens/watt  
Spacing Criteria (0/90/45): 1.32 / 1.32 / 1.14  
Luminous Opening: Circular (Dia: 0.67' x H: 0')  
CIE Type: Direct


Input Watts (W): 8  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P583674

CATALOG NUMBER: HC807D010-HM80520935-81WDWB

### Luminous Intensity Polar Plot

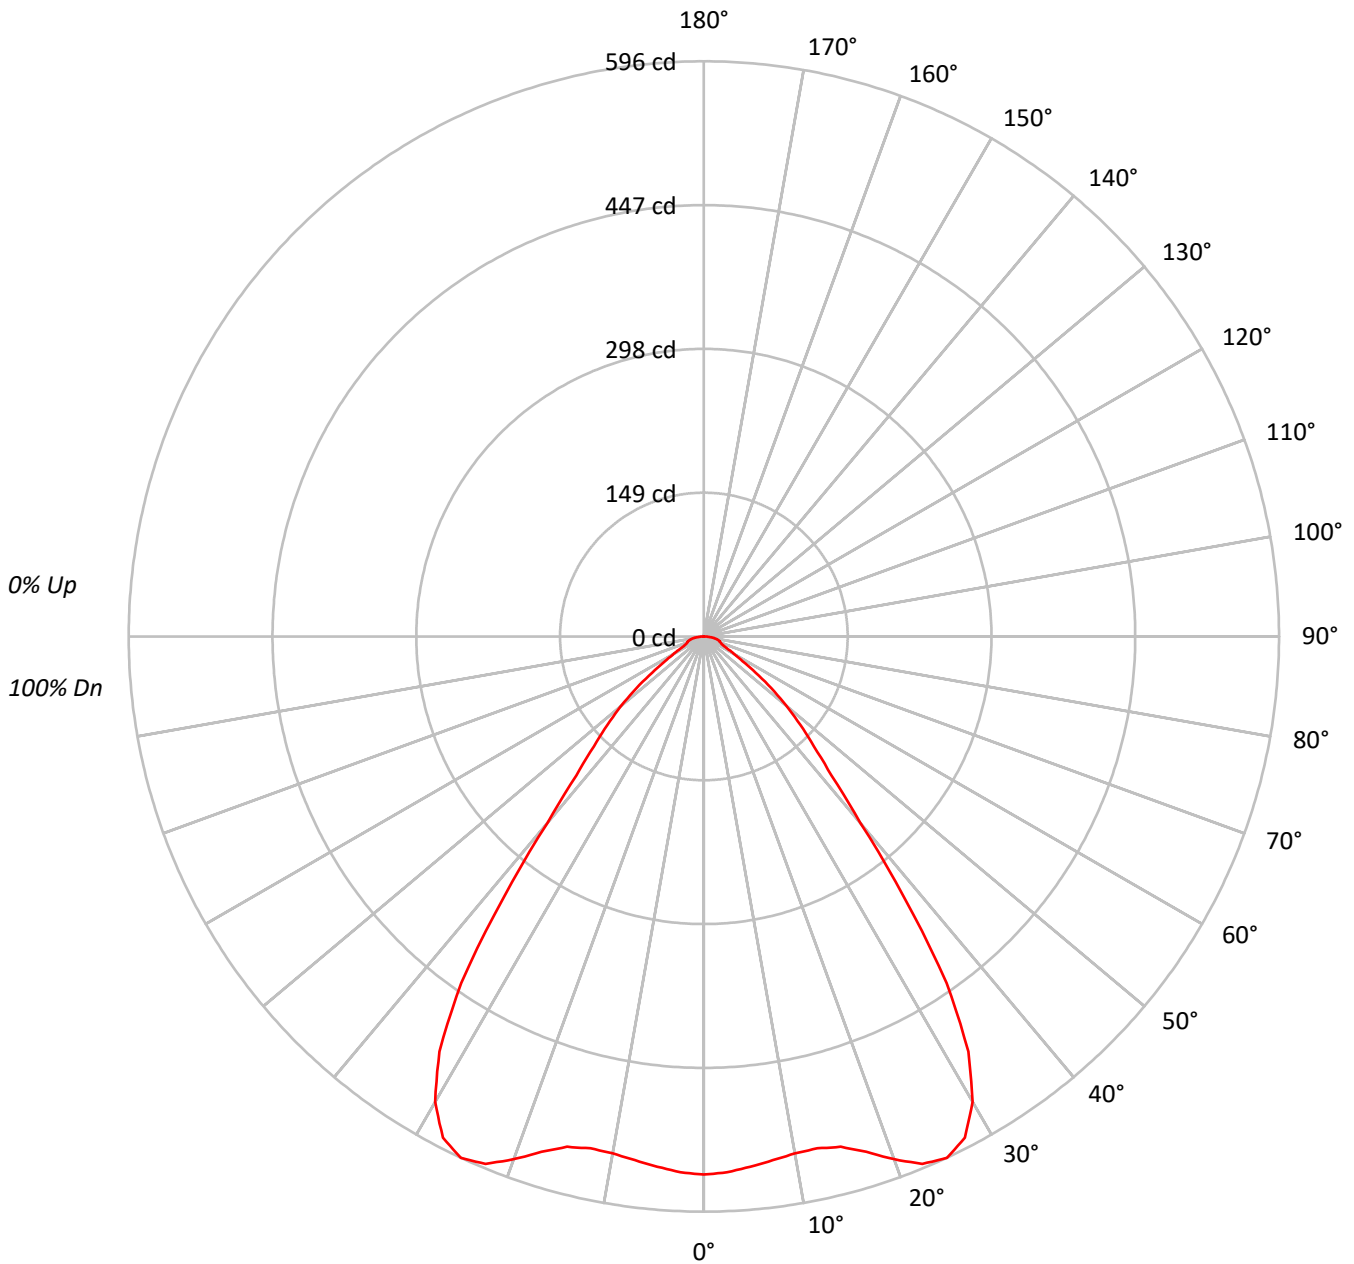



TEST NUMBER: P583674

CATALOG NUMBER: HC807D010-HM80520935-81WDWB

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			100
1	112	108	105	103	109	106	103	101	102	100	98	98	97	95	95	93	92	90			90
2	105	99	94	89	102	97	92	88	93	90	86	90	87	84	88	85	83	81			81
3	98	90	84	79	96	88	83	78	86	81	77	83	79	76	81	77	74	73			73
4	92	82	75	70	90	81	75	70	79	73	69	77	72	68	75	71	67	65			65
5	86	75	68	63	84	74	68	63	73	67	62	71	66	62	69	65	61	59			59
6	80	69	62	57	79	69	62	57	67	61	56	65	60	56	64	59	56	54			54
7	75	64	57	52	74	63	57	52	62	56	51	61	55	51	59	55	51	49			49
8	71	59	52	47	69	59	52	47	58	51	47	56	51	47	55	50	47	45			45
9	67	55	48	43	65	55	48	43	54	47	43	53	47	43	52	47	43	41			41
10	63	51	45	40	62	51	44	40	50	44	40	49	44	40	48	43	40	38			38

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	17191
5°	17071
10°	17027
15°	17475
20°	18918
25°	20282
30°	19829
35°	16511
40°	10144
45°	7025
50°	5359
55°	3516
60°	2196
65°	1649
70°	1659
75°	1906
80°	2095
85°	1911



TEST NUMBER: P583674

CATALOG NUMBER: HC807D010-HM80520935-81WDWB

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	52.4	5.4
10°-20°	157.1	16.1
20°-30°	270.5	27.6
30°-40°	262.1	26.8
40°-50°	129.1	13.2
50°-60°	60.9	6.2
60°-70°	24.0	2.5
70°-80°	16.5	1.7
80°-90°	6.2	0.6
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	480.0	49.0
0°-40°	742.1	75.8
0°-60°	932.1	95.2
0°-90°	978.8	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	978.8	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	558	
5°	552	52
15°	547	157
25°	596	271
35°	439	262
45°	161	129
55°	65	61
65°	23	24
75°	16	17
85°	5	6
90°	0	



TEST NUMBER: P583674

CATALOG NUMBER: HC807D010-HM80520935-81WDWB

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	557.5
2.5°	555.7
5°	551.5
7.5°	547.4
10°	543.8
12.5°	543.2
15°	547.4
17.5°	559.9
20°	576.5
22.5°	591.4
25°	596.1
27.5°	585.4
30°	556.9
32.5°	509.9
35°	438.6
37.5°	340.6
40°	252.0
42.5°	195.5
45°	161.1
47.5°	135.5
50°	111.7
52.5°	88.0
55°	65.4
57.5°	47.6
60°	35.6
62.5°	28.0
65°	22.6
67.5°	19.6
70°	18.4
72.5°	17.2
75°	16.0
77.5°	14.2
80°	11.8
82.5°	9.0
85°	5.4
87.5°	2.4
90°	0.0



Report Generated By 670245859 / DESKTOP-HRDQ47P







— 0°-180°







(END OF REPORT)