

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: HALO COMMERCIAL

Report Number: P583689

Luminaire Tested: **HC807D010-HM80520940-81WDH**

Issue Date: 10/21/2021

**Test Information**

Test Method: LM-41-14  
Report Number: P583689  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2109-368-8)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 10/21/2021  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: HALO COMMERCIAL  
Catalog Number: HC807D010-HM80520940-81WDH  
Description: HALO COMMERCIAL 8" ROUND, NEW CONSTRUCTION FRAME, WITH 8" WIDE DISTRIBUTION, HAZE TRIM  
Light Source: (1) HIGH LUMEN LED 90CRI / 4000K CCT  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 973.6 lumens  
Efficiency: N/A  
Efficacy: 121.7 lumens/watt  
Spacing Criteria (0/90/45): 1.12 / 1.12 / 1.06  
Luminous Opening: Circular (Dia: 0.67' x H: 0')  
CIE Type: Direct


Input Watts (W): 8  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P583689

CATALOG NUMBER: HC807D010-HM80520940-81WDH

### Luminous Intensity Polar Plot

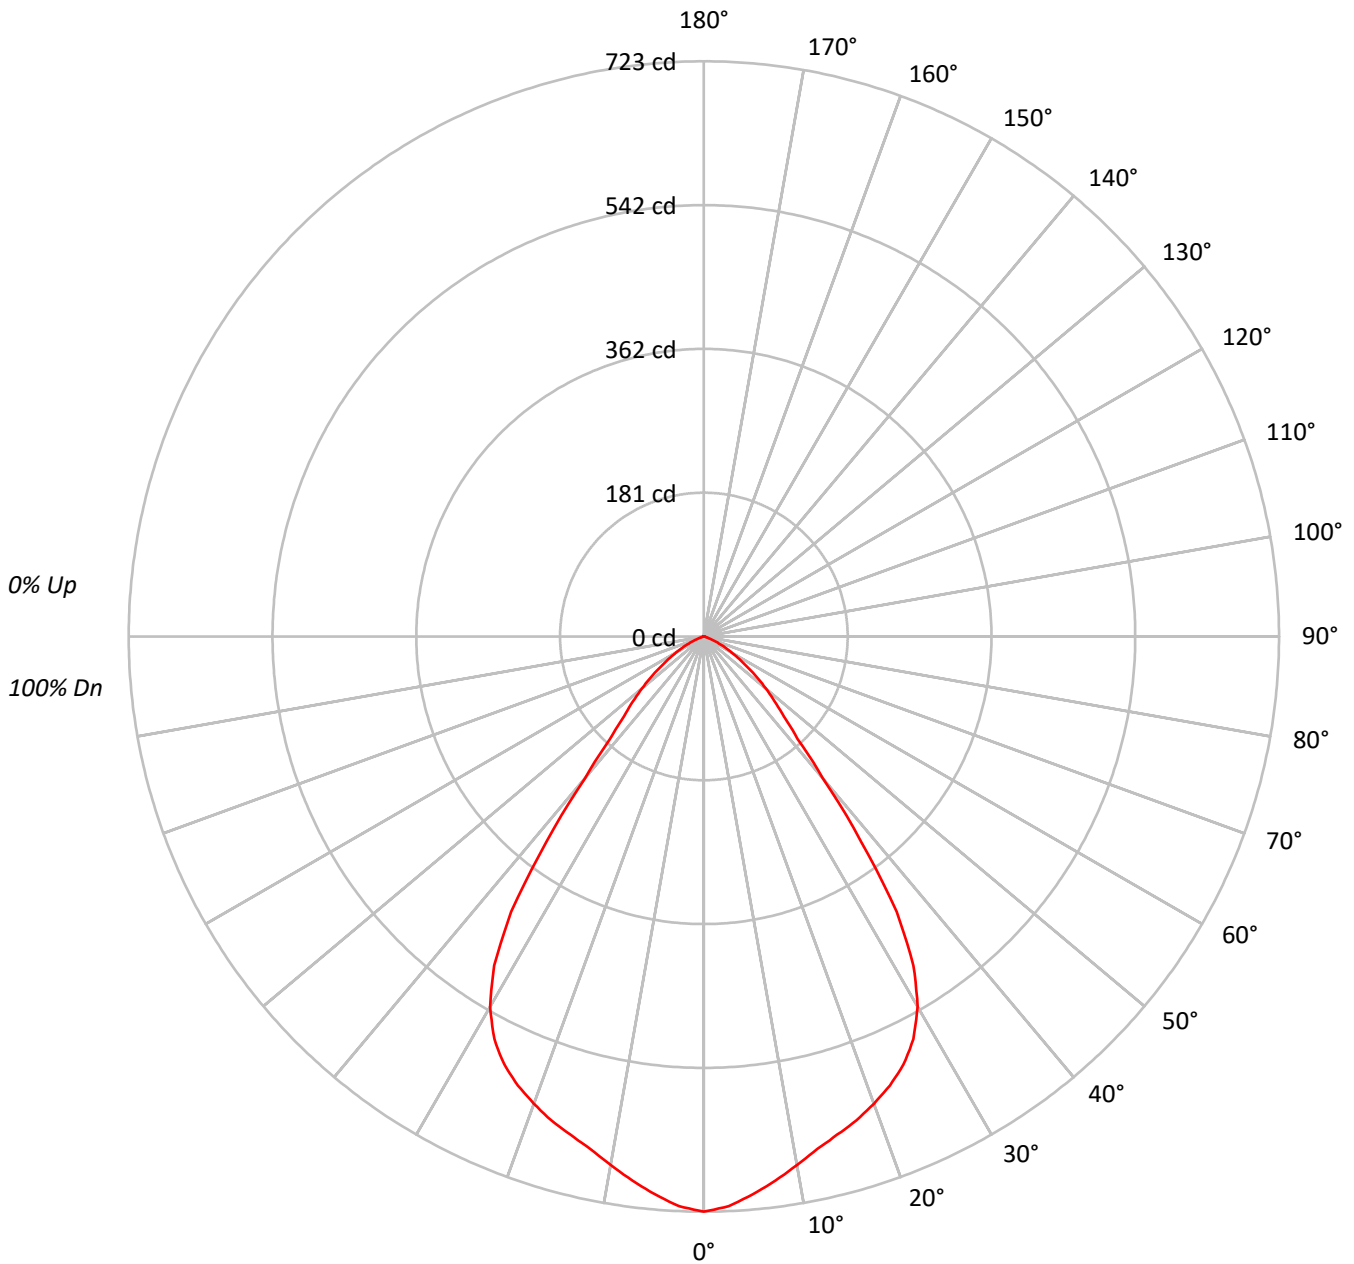



TEST NUMBER: P583689

CATALOG NUMBER: HC807D010-HM80520940-81WDH

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

|     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |    |    |   |
|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|----|----|---|
| RF  | 20  |     |     |     | 20  |     |     |     | 20  |     |     |     | 20  |     |     |     | 20  |     |    |    |   |
| RC  | 80  |     |     |     | 70  |     |     |     | 50  |     |     |     | 30  |     |     |     | 10  |     |    | 0  |   |
| RW  | 70  | 50  | 30  | 10  | 70  | 50  | 30  | 10  | 50  | 30  | 10  | 50  | 30  | 10  | 50  | 30  | 10  | 50  | 30 | 10 | 0 |
| RCR |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |    |    |   |
| 0   | 119 | 119 | 119 | 119 | 116 | 116 | 116 | 116 | 111 | 111 | 111 | 106 | 106 | 106 | 102 | 102 | 102 | 100 |    |    |   |
| 1   | 113 | 109 | 107 | 104 | 110 | 107 | 105 | 102 | 103 | 101 | 99  | 99  | 98  | 96  | 96  | 95  | 93  | 92  |    |    |   |
| 2   | 106 | 100 | 95  | 91  | 103 | 98  | 94  | 90  | 95  | 91  | 88  | 92  | 89  | 86  | 89  | 87  | 85  | 83  |    |    |   |
| 3   | 99  | 92  | 86  | 81  | 97  | 90  | 85  | 81  | 88  | 83  | 79  | 85  | 81  | 78  | 83  | 80  | 77  | 75  |    |    |   |
| 4   | 93  | 84  | 78  | 73  | 91  | 83  | 77  | 72  | 81  | 76  | 72  | 79  | 74  | 71  | 77  | 73  | 70  | 68  |    |    |   |
| 5   | 87  | 78  | 71  | 66  | 86  | 77  | 70  | 66  | 75  | 69  | 65  | 73  | 68  | 64  | 71  | 67  | 64  | 62  |    |    |   |
| 6   | 82  | 72  | 65  | 60  | 80  | 71  | 64  | 60  | 69  | 64  | 59  | 68  | 63  | 59  | 66  | 62  | 58  | 57  |    |    |   |
| 7   | 77  | 67  | 60  | 55  | 76  | 66  | 59  | 55  | 64  | 59  | 54  | 63  | 58  | 54  | 62  | 57  | 54  | 52  |    |    |   |
| 8   | 73  | 62  | 55  | 50  | 71  | 61  | 55  | 50  | 60  | 54  | 50  | 59  | 54  | 50  | 58  | 53  | 49  | 48  |    |    |   |
| 9   | 69  | 58  | 51  | 46  | 67  | 57  | 51  | 46  | 56  | 50  | 46  | 55  | 50  | 46  | 54  | 49  | 46  | 44  |    |    |   |
| 10  | 65  | 54  | 47  | 43  | 64  | 53  | 47  | 43  | 53  | 47  | 43  | 52  | 46  | 43  | 51  | 46  | 42  | 41  |    |    |   |

**AVERAGE LUMINANCE (cd/sqm):**

|     |       |
|-----|-------|
|     | 0°    |
| 0°  | 22292 |
| 5°  | 21789 |
| 10° | 21120 |
| 15° | 20693 |
| 20° | 20506 |
| 25° | 20200 |
| 30° | 19135 |
| 35° | 15897 |
| 40° | 9359  |
| 45° | 6192  |
| 50° | 4874  |
| 55° | 3586  |
| 60° | 2492  |
| 65° | 1518  |
| 70° | 658   |
| 75° | 286   |
| 80° | 213   |
| 85° | 0     |



TEST NUMBER: P583689

CATALOG NUMBER: HC807D010-HM80520940-81WDH

**ZONAL LUMENS:**

| Zone      | Lumens | % Fixture |
|-----------|--------|-----------|
| 0°-10°    | 66.3   | 6.8       |
| 10°-20°   | 183.3  | 18.8      |
| 20°-30°   | 271.5  | 27.9      |
| 30°-40°   | 250.9  | 25.8      |
| 40°-50°   | 115.7  | 11.9      |
| 50°-60°   | 60.8   | 6.2       |
| 60°-70°   | 21.5   | 2.2       |
| 70°-80°   | 3.3    | 0.3       |
| 80°-90°   | 0.3    | 0.0       |
| 90°-100°  | 0.0    | 0.0       |
| 100°-110° | 0.0    | 0.0       |
| 110°-120° | 0.0    | 0.0       |
| 120°-130° | 0.0    | 0.0       |
| 130°-140° | 0.0    | 0.0       |
| 140°-150° | 0.0    | 0.0       |
| 150°-160° | 0.0    | 0.0       |
| 160°-170° | 0.0    | 0.0       |
| 170°-180° | 0.0    | 0.0       |
| 0°-30°    | 521.0  | 53.5      |
| 0°-40°    | 771.9  | 79.3      |
| 0°-60°    | 948.4  | 97.4      |
| 0°-90°    | 973.6  | 100.0     |
| 90°-120°  | 0.0    | 0.0       |
| 90°-150°  | 0.0    | 0.0       |
| 90°-180°  | 0.0    | 0.0       |
| 0°-180°   | 973.6  | 100.0     |

**CANDELA DISTRIBUTION:**

|     | 0°  | Flux |
|-----|-----|------|
| 0°  | 723 |      |
| 5°  | 704 | 66   |
| 15° | 648 | 183  |
| 25° | 594 | 272  |
| 35° | 422 | 251  |
| 45° | 142 | 116  |
| 55° | 67  | 61   |
| 65° | 21  | 21   |
| 75° | 2   | 3    |
| 85° | 0   | 0    |
| 90° | 0   |      |



TEST NUMBER: P583689

CATALOG NUMBER: HC807D010-HM80520940-81WDH

**CANDELA DISTRIBUTION (FULL):**

|       | 0°    |
|-------|-------|
| 0°    | 722.9 |
| 2.5°  | 716.8 |
| 5°    | 703.9 |
| 7.5°  | 689.8 |
| 10°   | 674.5 |
| 12.5° | 659.8 |
| 15°   | 648.2 |
| 17.5° | 637.8 |
| 20°   | 624.9 |
| 22.5° | 610.9 |
| 25°   | 593.7 |
| 27.5° | 570.5 |
| 30°   | 537.4 |
| 32.5° | 490.3 |
| 35°   | 422.3 |
| 37.5° | 324.4 |
| 40°   | 232.5 |
| 42.5° | 174.5 |
| 45°   | 142.0 |
| 47.5° | 120.6 |
| 50°   | 101.6 |
| 52.5° | 83.3  |
| 55°   | 66.7  |
| 57.5° | 52.6  |
| 60°   | 40.4  |
| 62.5° | 30.6  |
| 65°   | 20.8  |
| 67.5° | 12.2  |
| 70°   | 7.3   |
| 72.5° | 4.3   |
| 75°   | 2.4   |
| 77.5° | 1.8   |
| 80°   | 1.2   |
| 82.5° | 0.6   |
| 85°   | 0.0   |
| 87.5° | 0.0   |
| 90°   | 0.0   |



Report Generated By 670245859 / DESKTOP-HRDQ47P







— 0°-180°







(END OF REPORT)