

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: HALO COMMERCIAL

Report Number: P585196

Luminaire Tested: **HC880D010-HM86080827-81WDBB**

Issue Date: 10/21/2021

**Test Information**

Test Method: LM-41-14  
Report Number: P585196  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2109-368-11)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 10/21/2021  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: HALO COMMERCIAL  
Catalog Number: HC880D010-HM86080827-81WDBB  
Description: HALO COMMERCIAL 8" ROUND, NEW CONSTRUCTION FRAME, WITH 8" WIDE DISTRIBUTION, BLACK BAFFLE TRIM  
Light Source: (1) HIGH LUMEN LED 80CRI / 2700K CCT  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 6238.7 lumens  
Efficiency: N/A  
Efficacy: 89.1 lumens/watt  
Spacing Criteria (0/90/45): 1.32 / 1.32 / 1.13  
Luminous Opening: Circular (Dia: 0.67' x H: 0')  
CIE Type: Direct


Input Watts (W): 70  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P585196

CATALOG NUMBER: HC880D010-HM86080827-81WDBB

### Luminous Intensity Polar Plot

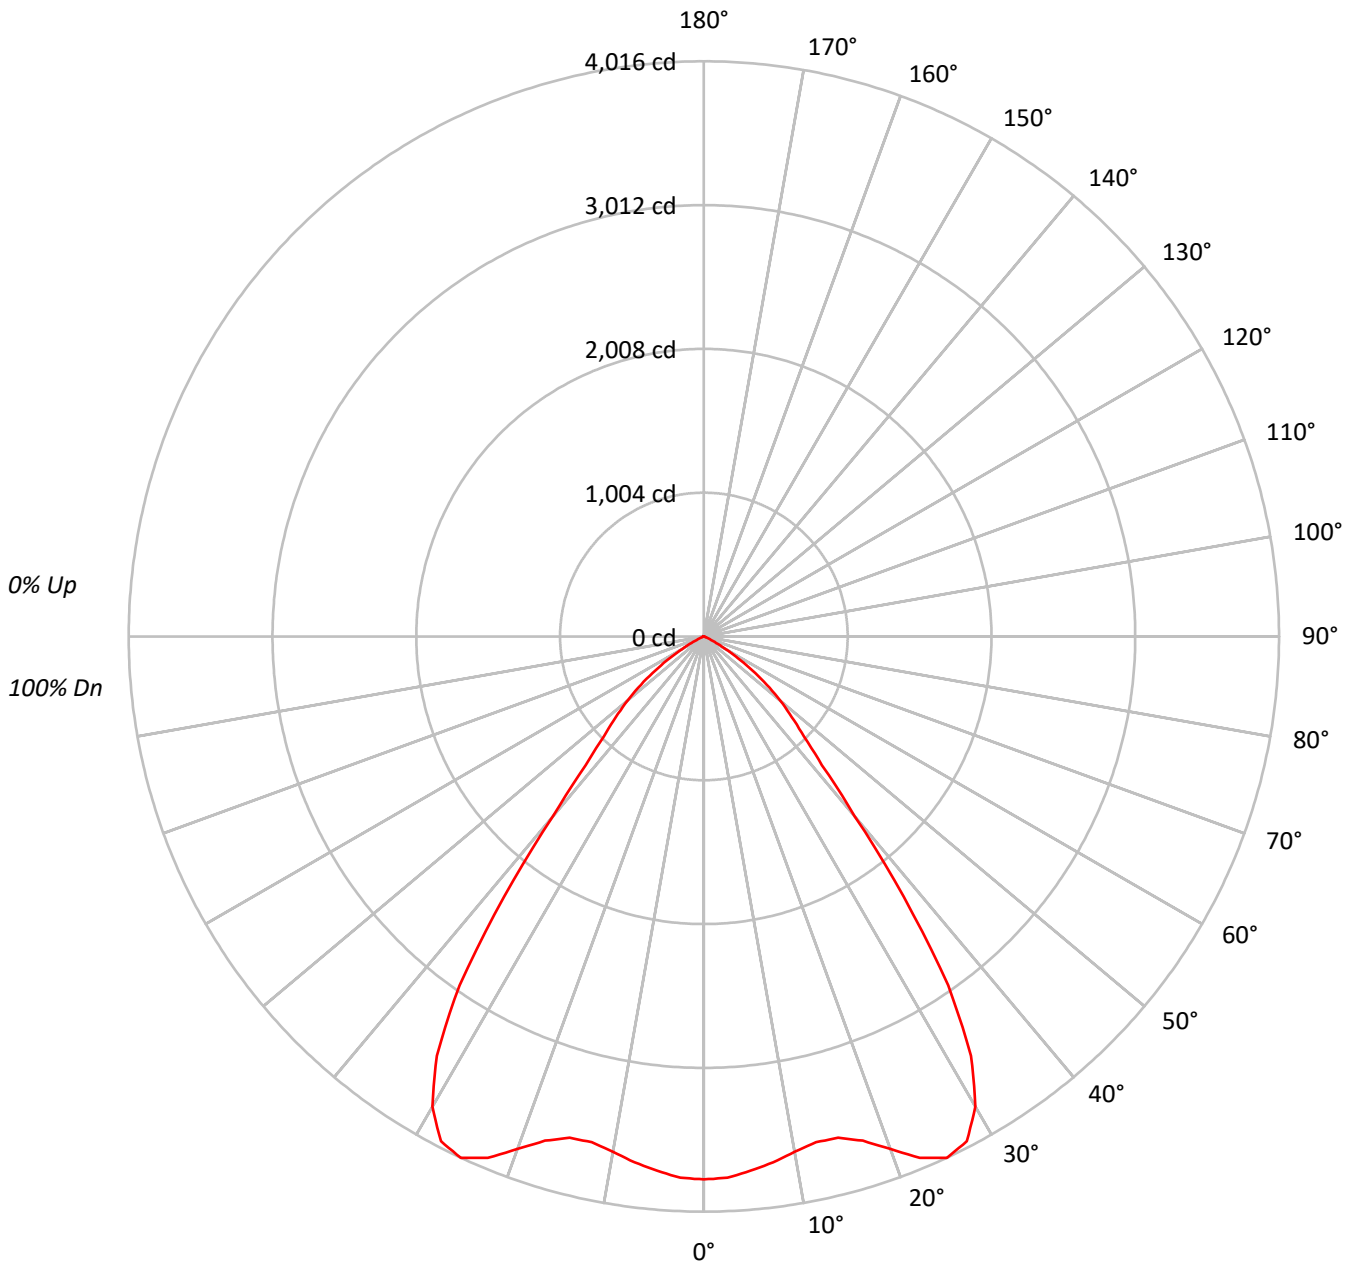



TEST NUMBER: P585196

CATALOG NUMBER: HC880D010-HM86080827-81WDBB

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			
1	113	109	107	104	110	107	105	102	103	101	99	99	98	96	96	95	93	92			
2	106	100	95	92	104	98	94	91	95	92	89	92	89	87	89	87	85	83			
3	99	92	86	81	97	90	85	81	88	83	79	85	81	78	83	80	77	75			
4	93	84	78	73	91	83	77	72	81	76	71	79	74	71	77	73	70	68			
5	87	77	71	66	85	76	70	65	74	69	65	73	68	64	71	67	63	62			
6	82	71	64	59	80	70	64	59	69	63	59	67	62	58	66	61	58	56			
7	77	66	59	54	75	65	59	54	64	58	54	63	57	53	61	57	53	51			
8	72	61	54	49	71	61	54	49	59	53	49	58	53	49	57	52	49	47			
9	68	57	50	45	67	56	50	45	55	49	45	54	49	45	53	48	45	43			
10	64	53	46	42	63	53	46	42	52	46	42	51	45	42	50	45	41	40			

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	116891
5°	115920
10°	114389
15°	115696
20°	124938
25°	136627
30°	134974
35°	111961
40°	65896
45°	43051
50°	33375
55°	22166
60°	10787
65°	3342
70°	1127
75°	989
80°	746
85°	1486



TEST NUMBER: P585196

CATALOG NUMBER: HC880D010-HM86080827-81WDBB

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	354.6	5.7
10°-20°	1041.2	16.7
20°-30°	1820.4	29.2
30°-40°	1770.8	28.4
40°-50°	805.3	12.9
50°-60°	373.4	6.0
60°-70°	62.5	1.0
70°-80°	7.7	0.1
80°-90°	2.9	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	3216.2	51.6
0°-40°	4986.9	79.9
0°-60°	6165.6	98.8
0°-90°	6238.7	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	6238.7	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	3791	
5°	3745	355
15°	3624	1041
25°	4016	1820
35°	2974	1771
45°	987	805
55°	412	373
65°	46	63
75°	8	8
85°	4	3
90°	0	



TEST NUMBER: P585196

CATALOG NUMBER: HC880D010-HM86080827-81WDBB

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	3790.7
2.5°	3782.3
5°	3744.9
7.5°	3703.1
10°	3653.2
12.5°	3615.7
15°	3624.1
17.5°	3690.7
20°	3807.3
22.5°	3940.6
25°	4015.6
27.5°	3974.0
30°	3790.7
32.5°	3470.0
35°	2974.2
37.5°	2291.1
40°	1637.0
42.5°	1220.5
45°	987.2
47.5°	833.1
50°	695.7
52.5°	554.1
55°	412.3
57.5°	283.2
60°	174.9
62.5°	95.8
65°	45.8
67.5°	20.8
70°	12.5
72.5°	8.3
75°	8.3
77.5°	4.2
80°	4.2
82.5°	4.2
85°	4.2
87.5°	0.0
90°	0.0



Report Generated By 670245859 / DESKTOP-HRDQ47P







— 0°-180°







(END OF REPORT)