

Classified  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269



Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: HALO COMMERCIAL

Report Number: P580307

Luminaire Tested: **HCC4W30D010MW-HM43040835-41WWW**

Issue Date: 9/9/2021

**Test Information**

Test Method: LM-41-14  
Report Number: P580307  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-2106-266-16)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 9/9/2021  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: HALO COMMERCIAL  
Catalog Number: HCC4W30D010MW-HM43040835-41WWW  
Description: HALO COMMERCIAL 4" ROUND, NEW CONSTRUCTION FRAME, WITH 4" WALLWASH DISTRIBUTION, WHITE TRIM  
Light Source: (1) HIGH LUMEN LED 80CRI / 3500K CCT  
CYLINDER  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**


Lumens per Lamp: N/A  
Luminaire Lumens: 2987.0 lumens  
Efficiency: N/A  
Efficacy: 106.7 lumens/watt  
Spacing Criteria (0/90/45): 1.06 / 1.03 / 1.1  
Luminous Opening: Circular (Dia: 0.33' x H: 0')  
CIE Type: Direct

Input Watts (W): 28  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P580307  
CATALOG NUMBER: HCC4W30D010MW-HM43040835-41WWW

### Luminous Intensity Polar Plot

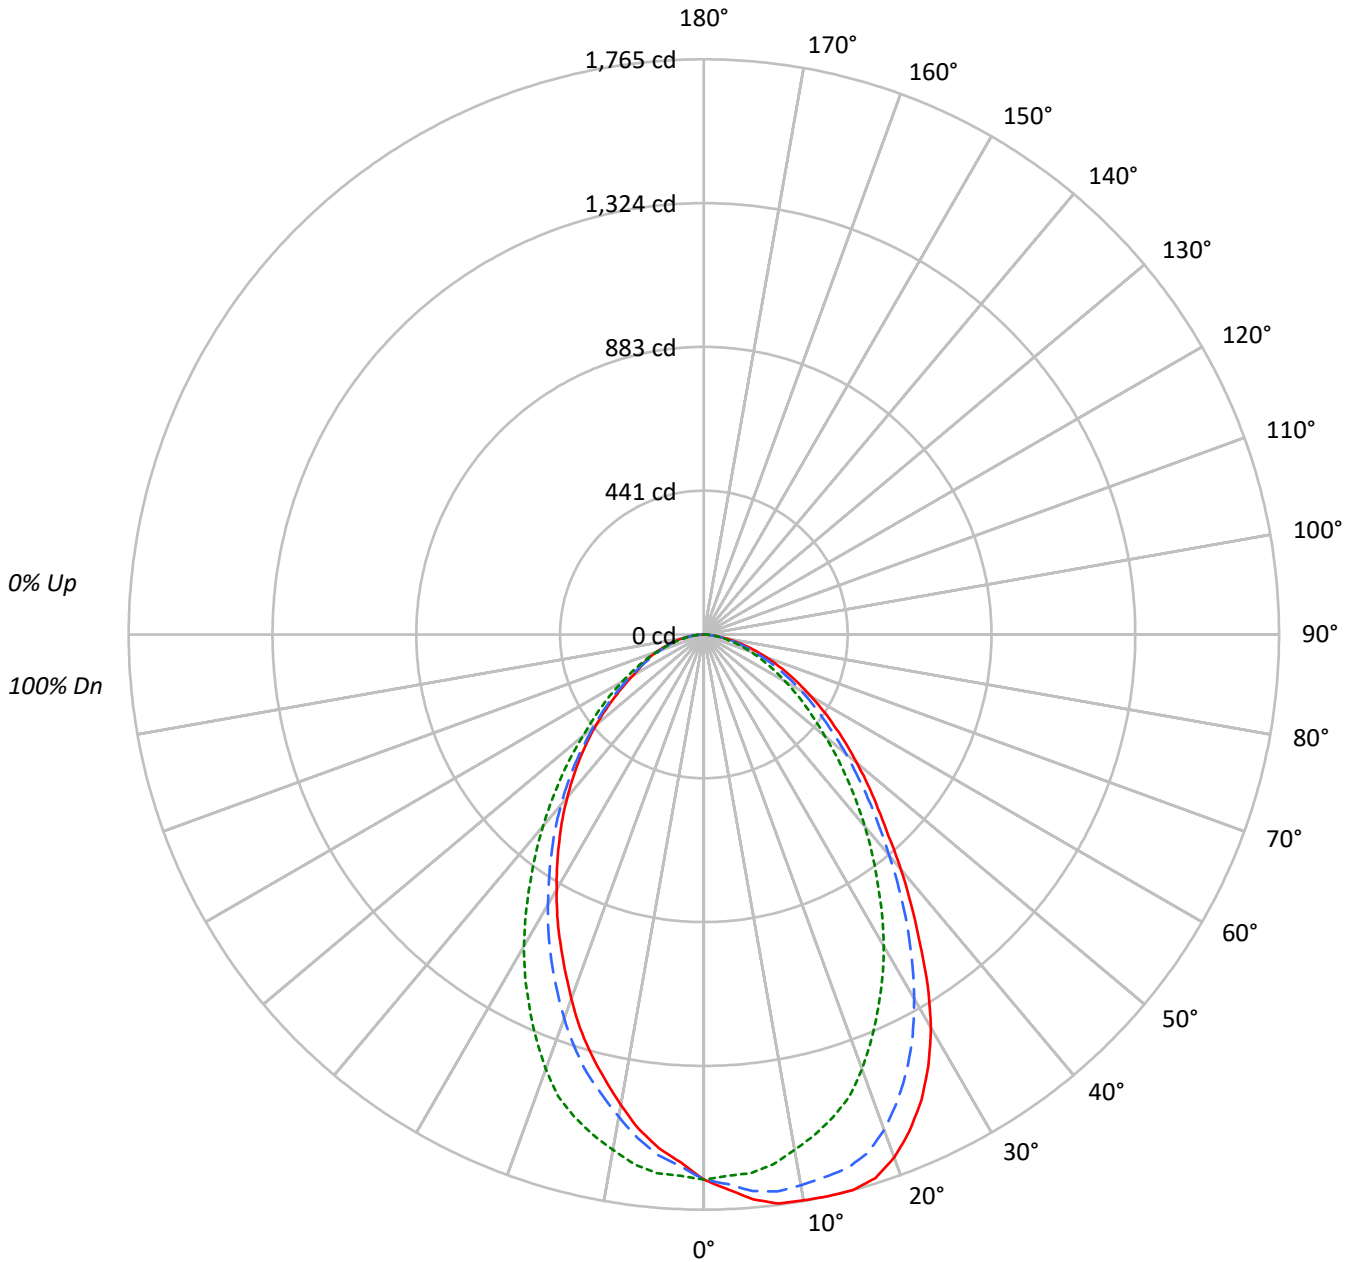



TEST NUMBER: P580307

CATALOG NUMBER: HCC4W30D010MW-HM43040835-41WWW

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			100																
1	111	106	103	100	108	104	101	98	100	97	95	96	94	92	93	91	89	87			87																
2	102	95	89	84	100	93	88	83	90	85	81	87	83	80	84	81	78	76			76																
3	94	85	78	72	92	84	77	72	81	75	71	78	73	69	76	72	68	66			66																
4	87	77	69	63	85	76	68	63	73	67	62	71	66	61	69	64	60	58			58																
5	81	70	62	56	79	69	61	56	67	60	55	65	59	54	63	58	54	52			52																
6	76	64	56	50	74	63	55	50	61	54	49	59	53	49	58	53	48	47			47																
7	71	58	50	45	69	58	50	45	56	49	44	55	49	44	53	48	44	42			42																
8	66	54	46	41	65	53	46	41	52	45	40	51	45	40	50	44	40	38			38																
9	62	50	42	37	61	49	42	37	48	42	37	47	41	37	46	41	37	35			35																
10	59	46	39	34	57	46	39	34	45	38	34	44	38	34	43	38	34	32			32																

**AVERAGE LUMINANCE (cd/sqm):**

	0°	90°	180°
0°	206308	206308	206308
5°	215392	205387	195891
10°	220838	201111	183627
15°	225398	195759	170373
20°	224208	186234	156018
25°	214788	172203	141935
30°	198430	157240	128640
35°	173932	139856	116456
40°	151452	123580	104870
45°	131805	107785	93725
50°	117419	92895	82705
55°	104943	81675	71503
60°	93693	71343	61673
65°	83297	62604	58576
70°	73101	53952	54637
75°	61859	45941	50659
80°	47520	39068	46171
85°	27739	30711	38919



TEST NUMBER: P580307  
 CATALOG NUMBER: HCC4W30D010MW-HM43040835-41WWW

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	156.8	5.2
10°-20°	432.5	14.5
20°-30°	590.9	19.8
30°-40°	593.3	19.9
40°-50°	490.8	16.4
50°-60°	355.7	11.9
60°-70°	225.3	7.5
70°-80°	113.9	3.8
80°-90°	27.9	0.9
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1180.1	39.5
0°-40°	1773.4	59.4
0°-60°	2619.9	87.7
0°-90°	2987.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	2987.0	100.0

**CANDELA DISTRIBUTION:**

	0°	45°	90°	135°	180°	Flux
0°	1673	1673	1673	1673	1673	
5°	1740	1714	1659	1604	1582	167
15°	1765	1696	1533	1391	1334	496
25°	1578	1474	1265	1106	1043	721
35°	1155	1086	929	815	773	724
45°	756	712	618	557	537	588
55°	488	445	380	346	332	439
65°	285	254	214	193	201	284
75°	130	112	96	100	106	139
85°	20	20	22	26	28	27
90°	0	0	0	0	0	



TEST NUMBER: P580307

CATALOG NUMBER: HCC4W30D010MW-HM43040835-41WWW

**CANDELA DISTRIBUTION (FULL):**

	0°	22.5°	45°	67.5°	90°	112.5°	135°	157.5°	180°
0°	1672.6	1672.6	1672.6	1672.6	1672.6	1672.6	1672.6	1672.6	1672.6
2.5°	1704.2	1698.2	1688.4	1676.5	1662.8	1647.1	1633.3	1625.4	1621.5
5°	1739.6	1731.7	1714.0	1688.4	1658.8	1629.4	1603.8	1588.0	1582.1
7.5°	1761.3	1749.4	1723.8	1684.4	1639.2	1595.9	1558.6	1536.9	1530.9
10°	1763.2	1749.4	1715.9	1662.8	1605.7	1548.6	1503.4	1471.9	1466.1
12.5°	1765.1	1747.4	1706.1	1643.2	1572.3	1501.5	1446.3	1409.0	1399.2
15°	1765.1	1747.4	1696.3	1621.5	1533.0	1452.3	1391.3	1348.0	1334.2
17.5°	1749.4	1729.7	1668.8	1582.1	1485.7	1395.2	1324.4	1279.0	1265.3
20°	1708.1	1686.5	1617.6	1523.1	1418.8	1324.4	1253.5	1206.3	1188.6
22.5°	1649.0	1623.4	1550.7	1448.4	1344.0	1247.6	1178.8	1129.6	1113.8
25°	1578.2	1552.6	1474.0	1373.6	1265.3	1174.8	1105.9	1060.7	1042.9
27.5°	1491.7	1464.0	1387.3	1286.9	1186.7	1096.1	1033.1	991.7	974.0
30°	1393.2	1363.8	1290.9	1194.4	1104.0	1017.3	956.3	922.9	903.2
32.5°	1279.0	1253.5	1188.6	1101.9	1017.3	934.8	883.6	854.0	838.3
35°	1155.1	1141.3	1086.3	1011.5	928.8	860.0	814.6	787.1	773.4
37.5°	1044.9	1031.1	984.0	920.9	848.1	785.2	747.8	724.2	712.3
40°	940.6	928.8	883.6	830.4	767.5	712.3	680.9	663.2	651.3
42.5°	838.3	832.4	795.0	745.8	690.7	643.5	617.9	604.2	594.2
45°	755.6	747.8	712.3	665.2	617.9	578.6	556.9	547.1	537.3
47.5°	682.9	673.0	635.6	594.2	551.0	515.6	495.9	486.1	482.1
50°	611.9	602.1	568.7	527.3	484.1	458.5	442.7	432.9	431.0
52.5°	549.0	539.2	501.8	462.5	429.0	407.3	393.6	383.7	379.8
55°	488.0	476.2	444.8	407.3	379.8	360.1	346.3	336.5	332.5
57.5°	432.9	421.1	393.6	358.1	332.5	314.8	303.1	293.2	289.2
60°	379.8	370.0	344.4	310.9	289.2	273.5	261.7	253.8	250.0
62.5°	330.6	322.7	297.1	267.7	250.0	236.1	226.3	218.4	222.3
65°	285.4	277.5	253.8	228.3	214.5	200.7	192.9	192.9	200.7
67.5°	242.1	234.2	214.5	192.9	181.0	171.2	165.3	171.2	177.1
70°	202.7	194.8	177.1	159.4	149.6	141.7	141.7	147.5	151.5
72.5°	165.3	157.5	143.7	129.8	122.0	116.1	122.0	125.9	129.8
75°	129.8	124.0	112.1	102.3	96.4	94.4	100.4	104.3	106.3
77.5°	96.4	92.5	84.6	76.7	72.8	74.8	80.7	82.7	84.6
80°	66.9	65.0	59.0	55.0	55.0	57.1	61.0	62.9	65.0
82.5°	41.3	41.3	37.3	35.4	37.3	41.3	43.3	45.2	45.2
85°	19.6	21.7	19.6	19.6	21.7	25.6	25.6	27.5	27.5
87.5°	5.9	5.9	7.9	7.9	9.8	9.8	9.8	9.8	11.8
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Classified  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Classified  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report





Classified  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°    - - 45°-225°    - - - - 90°-270°

Classified  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Classified  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Classified  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)