

Classified
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: HALO COMMERCIAL

Report Number: P580381

Luminaire Tested: **HCC4S30D010BZ-HM43040940-41WDBB**

Issue Date: 9/9/2021

Test Information

Test Method: LM-41-14
Report Number: P580381
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-2106-266-11)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 9/9/2021
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: HALO COMMERCIAL
Catalog Number: HCC4S30D010BZ-HM43040940-41WDBB
Description: HALO COMMERCIAL 4" ROUND, NEW CONSTRUCTION FRAME, WITH 4" WIDE DISTRIBUTION, BLACK BAFFLE TRIM
Light Source: (1) HIGH LUMEN LED 90CRI / 4000K CCT CYLINDER
Ballast/Driver: ELECTRONIC DRIVER

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 2273.8 lumens
Efficiency: N/A
Efficacy: 81.2 lumens/watt
Spacing Criteria (0/90/45): 1.1 / 1.1 / 1.03
Luminous Opening: Circular (Dia: 0.33' x H: 0')
CIE Type: Direct

Input Watts (W): 28
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P580381
CATALOG NUMBER: HCC4S30D010BZ-HM43040940-41WDBB

Luminous Intensity Polar Plot

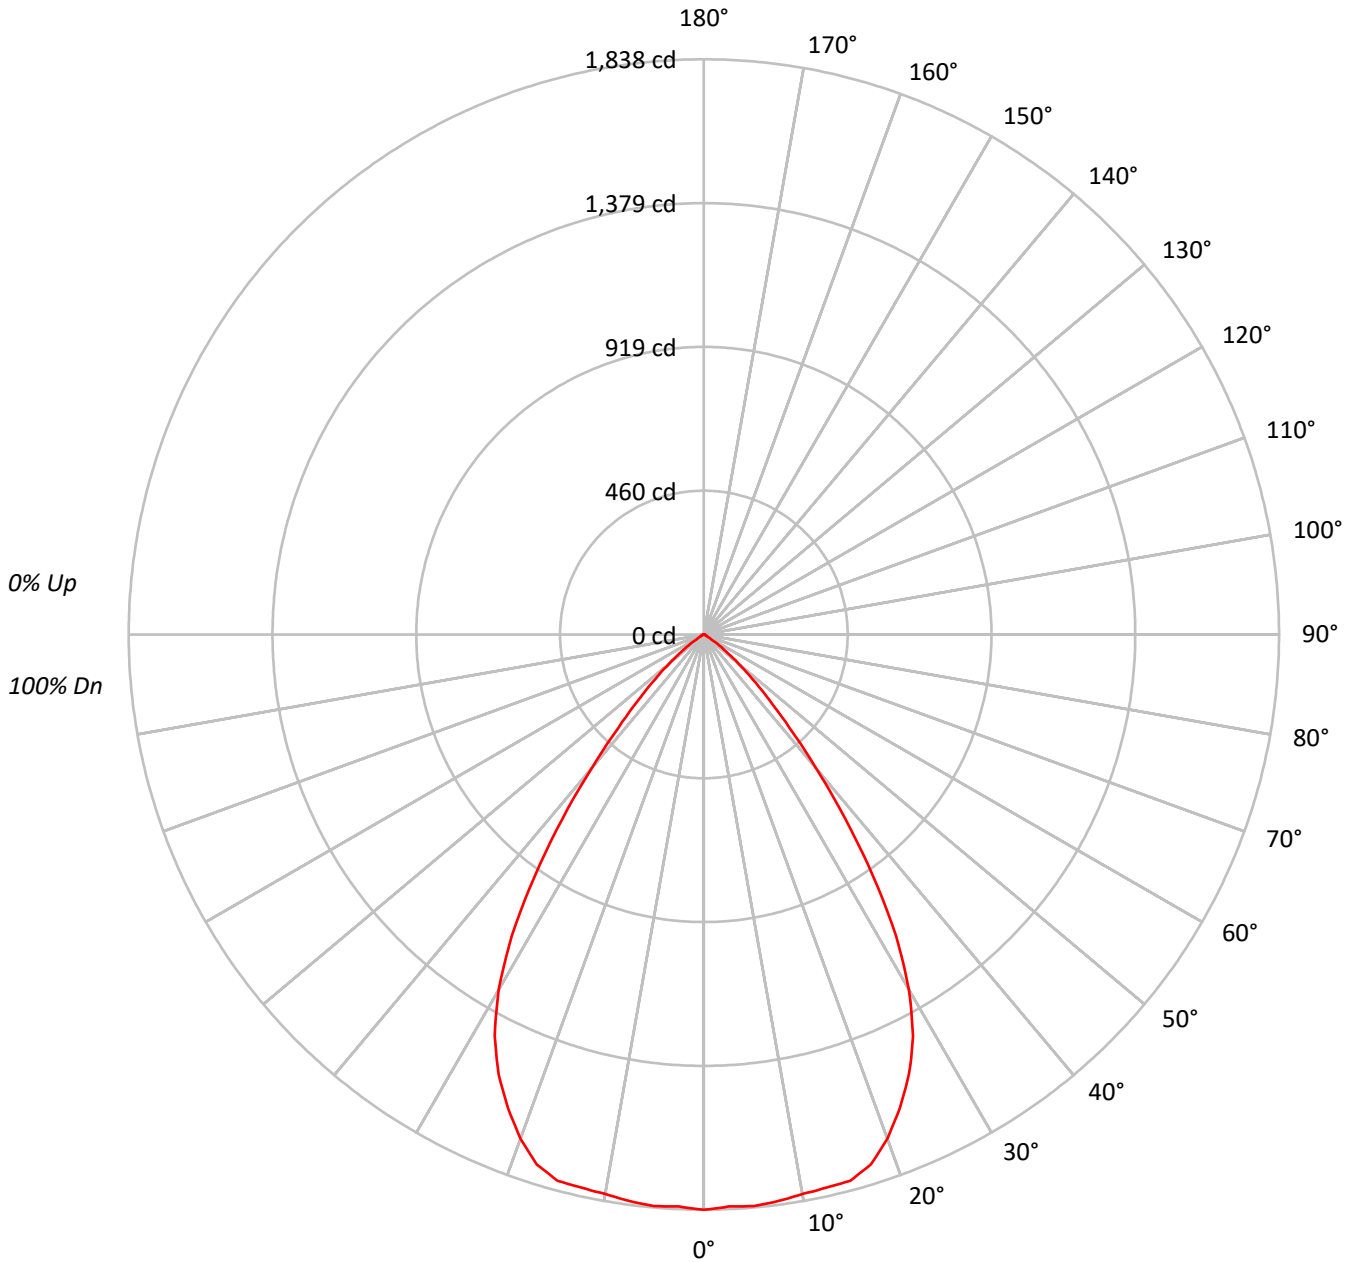

Cooper Lighting Solutions Photometric Lab
 1121 Highway 74 South
 Peachtree City, GA 30269



TEST NUMBER: P580381

CATALOG NUMBER: HCC4S30D010BZ-HM43040940-41WDBB

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									20								
RC	80									50									30									10									0								
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0															
RCR	0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	100	99	97	97	96	94	93	93	91	89	87	85														
	1	113	110	107	105	111	108	106	103	104	102	100	100	99	97	97	96	94	93	93	91	89	87	85	83	81	79	77	75	72															
	2	107	102	97	94	105	100	96	93	97	93	91	94	91	89	91	89	87	85	83	81	79	77	75	72	70	68	66	64	61															
	3	101	94	89	84	99	93	88	84	90	86	82	87	84	81	85	82	80	78	76	74	72	70	68	66	64	62	60	58	56															
	4	95	87	81	77	93	86	80	76	84	79	75	82	78	74	80	76	73	72	70	68	66	64	62	60	58	56	54	52	50															
	5	90	81	75	70	88	80	74	70	78	73	69	76	72	68	75	71	68	66	64	62	60	58	56	54	52	50	48	46	44															
	6	85	75	69	64	83	74	68	64	73	67	63	71	67	63	70	66	62	61	59	57	55	53	51	49	47	45	43	41	39															
	7	80	70	64	59	79	69	63	59	68	63	59	67	62	58	66	61	58	56	54	52	50	48	46	44	42	40	38	36	34															
	8	76	65	59	55	74	65	59	54	64	58	54	63	58	54	62	57	54	52	50	48	46	44	42	40	38	36	34	32	30															
	9	72	61	55	51	71	61	55	51	60	54	50	59	54	50	58	53	50	48	46	44	42	40	38	36	34	32	30	28	26															
	10	68	58	51	47	67	57	51	47	56	51	47	55	50	47	55	50	47	45	43	41	39	37	35	33	31	29	27	25	23															

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	226759
5°	226981
10°	227401
15°	230735
20°	224983
25°	211086
30°	186722
35°	141979
40°	89445
45°	51354
50°	27229
55°	11311
60°	3034
65°	2568
70°	1911
75°	1668
80°	1279
85°	2547



TEST NUMBER: P580381
 CATALOG NUMBER: HCC4S30D010BZ-HM43040940-41WDBB

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	174.3	7.7
10°-20°	505.9	22.3
20°-30°	706.1	31.1
30°-40°	581.1	25.6
40°-50°	239.3	10.5
50°-60°	53.9	2.4
60°-70°	8.7	0.4
70°-80°	3.3	0.1
80°-90°	1.2	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1386.4	61.0
0°-40°	1967.4	86.5
0°-60°	2260.7	99.4
0°-90°	2273.8	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	2273.8	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1838	
5°	1833	174
15°	1807	506
25°	1551	706
35°	943	581
45°	294	239
55°	53	54
65°	9	9
75°	4	3
85°	2	1
90°	0	



TEST NUMBER: P580381
CATALOG NUMBER: HCC4S30D010BZ-HM43040940-41WDBB

CANDELA DISTRIBUTION (FULL):

	0°
0°	1838.4
2.5°	1829.6
5°	1833.2
7.5°	1826.1
10°	1815.6
12.5°	1810.4
15°	1806.9
17.5°	1775.4
20°	1714.0
22.5°	1636.8
25°	1551.0
27.5°	1447.6
30°	1311.0
32.5°	1142.7
35°	942.9
37.5°	741.3
40°	555.5
42.5°	404.8
45°	294.4
47.5°	210.3
50°	141.9
52.5°	89.3
55°	52.6
57.5°	26.3
60°	12.3
62.5°	10.5
65°	8.8
67.5°	7.0
70°	5.3
72.5°	3.5
75°	3.5
77.5°	1.8
80°	1.8
82.5°	1.8
85°	1.8
87.5°	0.0
90°	0.0

Classified
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Classified
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Classified
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Classified
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Classified
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Classified
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)