

Classified  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269



Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: HALO COMMERCIAL

Report Number: P580446

Luminaire Tested: **HCC4W35D010BZ-HM43040835-41PSMDW**

Issue Date: 9/9/2021

**Test Information**

Test Method: LM-41-14  
Report Number: P580446  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-2106-266-12)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 9/9/2021  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: HALO COMMERCIAL  
Catalog Number: HCC4W35D010BZ-HM43040835-41PSMDW  
Description: HALO COMMERCIAL 4" ROUND, NEW CONSTRUCTION FRAME, WITH 4" PLASTIC TRIM  
Light Source: (1) HIGH LUMEN LED 80CRI / 3500K CCT  
CYLINDER  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**


Lumens per Lamp: N/A  
Luminaire Lumens: 3332.6 lumens  
Efficiency: N/A  
Efficacy: 98.9 lumens/watt  
Spacing Criteria (0/90/45): 1.03 / 1.03 / 0.99  
Luminous Opening: Circular (Dia: 0.33' x H: 0')  
CIE Type: Direct

Input Watts (W): 33.7  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P580446  
CATALOG NUMBER: HCC4W35D010BZ-HM43040835-41PSMDW

### Luminous Intensity Polar Plot

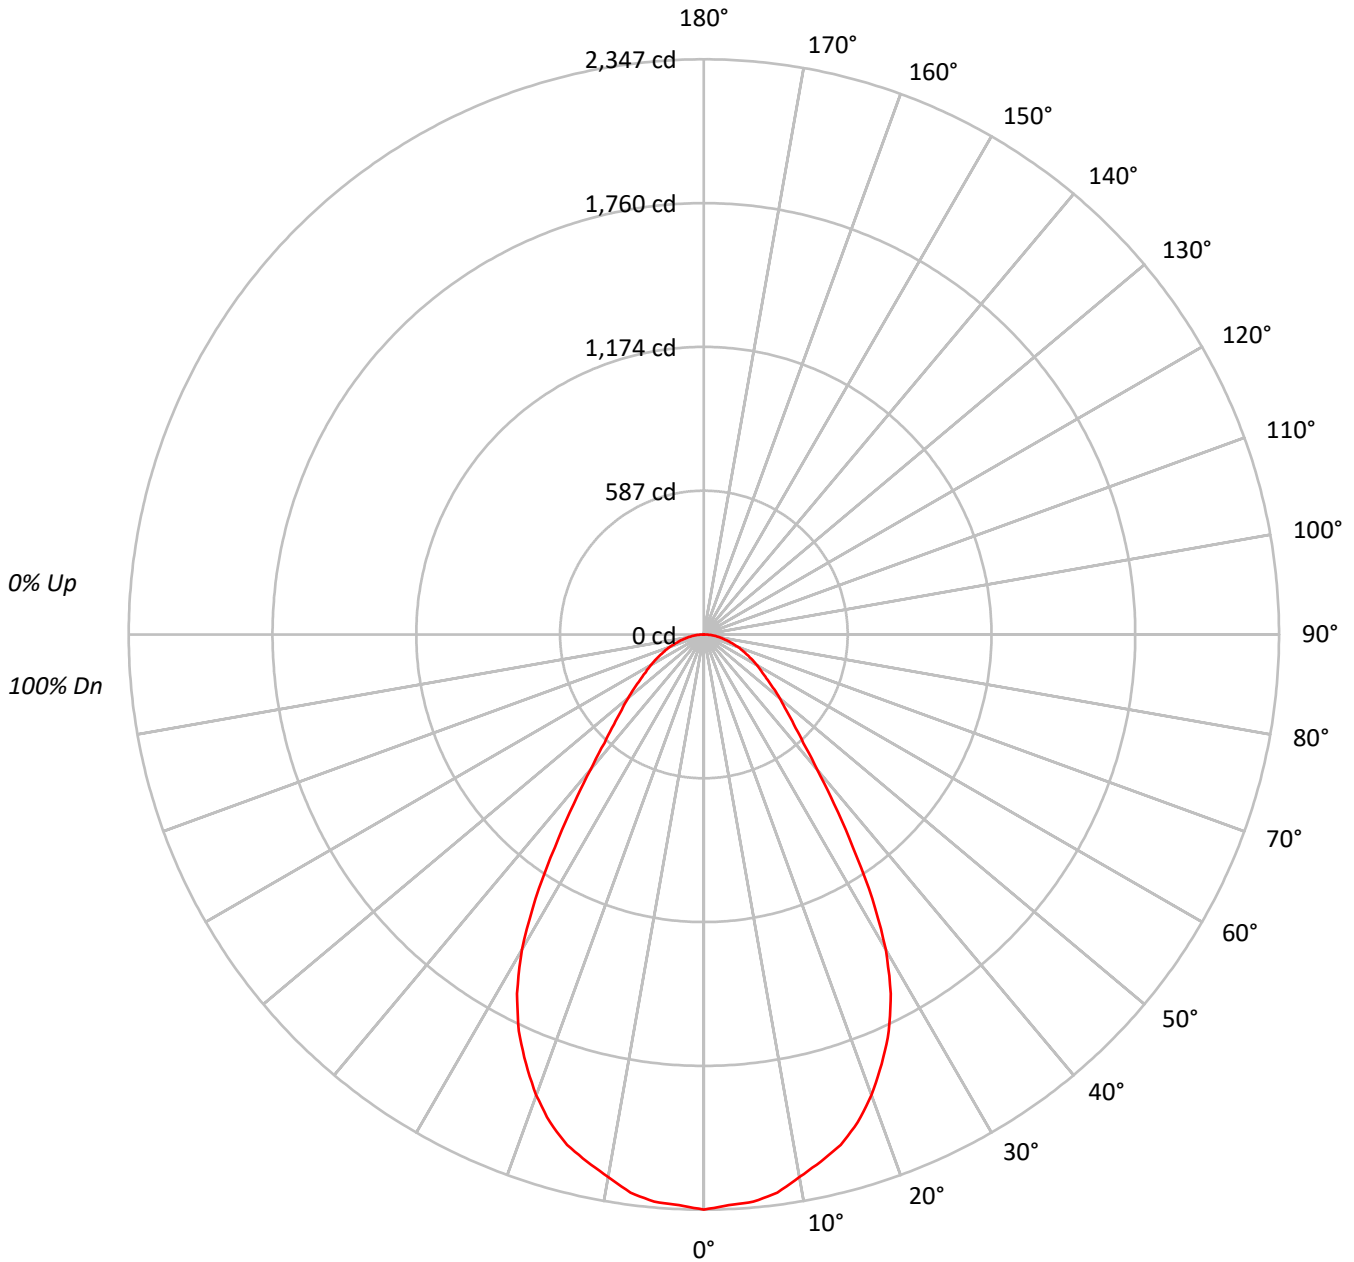

Cooper Lighting Solutions Photometric Lab  
 1121 Highway 74 South  
 Peachtree City, GA 30269



TEST NUMBER: P580446

CATALOG NUMBER: HCC4W35D010BZ-HM43040835-41PSMDW

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			
1	111	107	104	101	109	105	102	99	101	99	96	97	95	93	94	92	91	89			
2	103	97	91	87	101	95	90	86	92	88	84	89	85	82	86	83	80	78			
3	96	88	81	76	94	86	80	75	84	78	74	81	77	73	79	75	72	70			
4	90	80	73	68	88	79	72	67	77	71	66	74	69	65	72	68	65	63			
5	84	74	66	61	82	72	66	60	71	64	60	69	63	59	67	62	59	57			
6	79	68	60	55	77	67	60	55	65	59	54	64	58	54	62	57	53	52			
7	74	63	55	50	73	62	55	50	61	54	50	59	54	49	58	53	49	47			
8	70	58	51	46	68	58	51	46	56	50	46	55	50	45	54	49	45	44			
9	66	54	47	42	65	54	47	42	53	47	42	52	46	42	51	46	42	40			
10	62	51	44	39	61	50	44	39	49	43	39	49	43	39	48	43	39	37			

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	289468
5°	287651
10°	281533
15°	275302
20°	262576
25°	243069
30°	211433
35°	159657
40°	115722
45°	90428
50°	77332
55°	66879
60°	61623
65°	56387
70°	52689
75°	48277
80°	45176
85°	43448



TEST NUMBER: P580446  
 CATALOG NUMBER: HCC4W35D010BZ-HM43040835-41PSMDW

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	219.4	6.6
10°-20°	603.9	18.1
20°-30°	812.1	24.4
30°-40°	667.7	20.0
40°-50°	410.1	12.3
50°-60°	283.8	8.5
60°-70°	193.4	5.8
70°-80°	107.8	3.2
80°-90°	34.3	1.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1635.4	49.1
0°-40°	2303.1	69.1
0°-60°	2997.0	89.9
0°-90°	3332.6	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	3332.6	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	2347	
5°	2323	219
15°	2156	604
25°	1786	812
35°	1060	668
45°	518	410
55°	311	284
65°	193	193
75°	101	108
85°	31	34
90°	0	



TEST NUMBER: P580446  
CATALOG NUMBER: HCC4W35D010BZ-HM43040835-41PSMDW

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	2346.8
2.5°	2330.3
5°	2323.2
7.5°	2297.3
10°	2247.8
12.5°	2203.0
15°	2155.9
17.5°	2087.6
20°	2000.4
22.5°	1896.8
25°	1786.0
27.5°	1651.7
30°	1484.5
32.5°	1279.4
35°	1060.3
37.5°	871.8
40°	718.7
42.5°	600.8
45°	518.4
47.5°	454.8
50°	403.0
52.5°	355.7
55°	311.0
57.5°	278.1
60°	249.8
62.5°	221.4
65°	193.2
67.5°	169.6
70°	146.1
72.5°	122.5
75°	101.3
77.5°	80.1
80°	63.6
82.5°	47.1
85°	30.7
87.5°	16.5
90°	0.0

Classified  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Classified  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report





Classified  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Classified  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Classified  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Classified  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)