

Classified  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269



Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: HALO COMMERCIAL

Report Number: P580565

Luminaire Tested: **HCC4S40D010BZ-HM43040830-41WDH**

Issue Date: 9/9/2021

**Test Information**

Test Method: LM-41-14  
Report Number: P580565  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-2106-266-8)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 9/9/2021  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: HALO COMMERCIAL  
Catalog Number: HCC4S40D010BZ-HM43040830-41WDH  
Description: HALO COMMERCIAL 4" ROUND, NEW CONSTRUCTION FRAME, WITH 4" WIDE DISTRIBUTION, HAZE TRIM  
Light Source: (1) HIGH LUMEN LED 80CRI / 3000K CCT  
CYLINDER  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**


Lumens per Lamp: N/A  
Luminaire Lumens: 4341.0 lumens  
Efficiency: N/A  
Efficacy: 105.9 lumens/watt  
Spacing Criteria (0/90/45): 1.19 / 1.19 / 1.11  
Luminous Opening: Circular (Dia: 0.33' x H: 0')  
CIE Type: Direct

Input Watts (W): 41  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P580565  
CATALOG NUMBER: HCC4S40D010BZ-HM43040830-41WDH

### Luminous Intensity Polar Plot

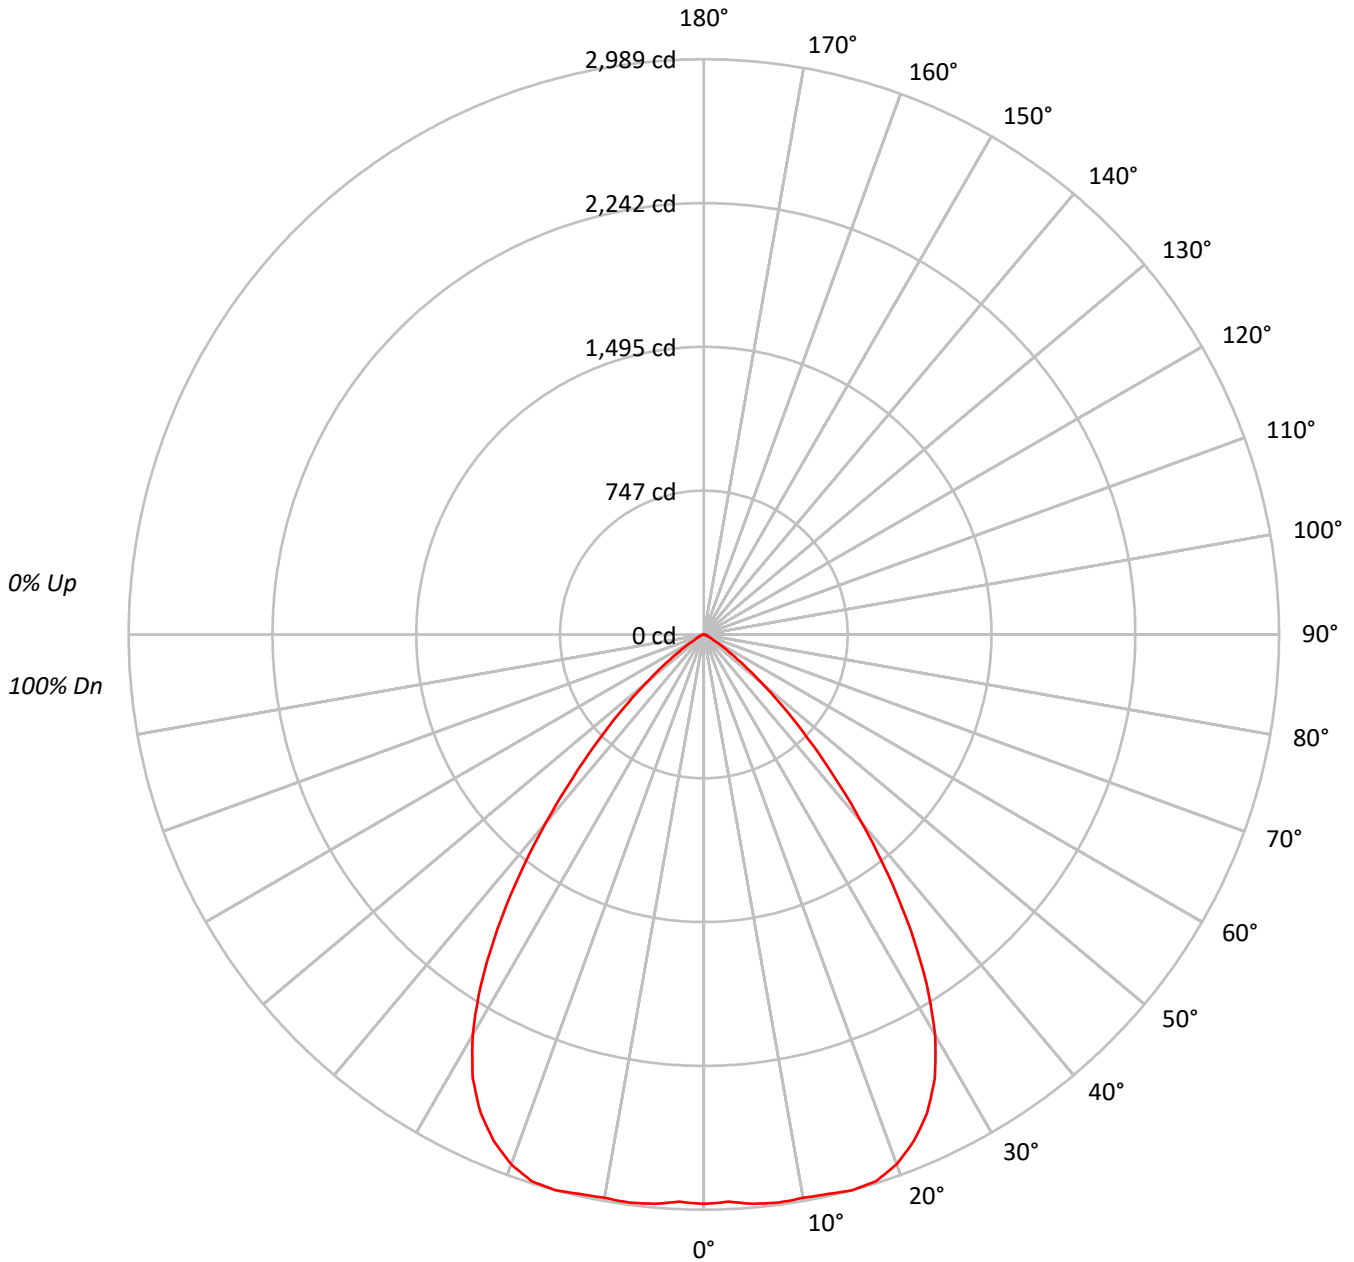



TEST NUMBER: P580565

CATALOG NUMBER: HCC4S40D010BZ-HM43040830-41WDH

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20					20					20					20					20					
RC	80					70					50					30					10					0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0		
RCR																										
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100					100			
1	113	110	107	104	110	108	105	103	103	101	100	100	98	97	96	95	94	92					92			
2	106	101	96	92	104	99	95	91	96	92	89	93	90	87	90	88	86	84					84			
3	100	93	87	82	98	91	86	82	88	84	80	86	82	79	84	81	78	76					76			
4	94	85	79	74	92	84	78	74	82	77	73	80	75	72	78	74	71	69					69			
5	88	79	72	67	86	78	72	67	76	70	66	74	69	66	72	68	65	63					63			
6	83	73	66	61	81	72	66	61	70	65	61	69	64	60	68	63	60	58					58			
7	78	68	61	56	77	67	60	56	65	60	55	64	59	55	63	58	55	53					53			
8	74	63	56	51	72	62	56	51	61	55	51	60	55	51	59	54	51	49					49			
9	69	59	52	47	68	58	52	47	57	51	47	56	51	47	55	50	47	45					45			
10	66	55	48	44	65	54	48	44	53	48	44	53	47	44	52	47	43	42					42			

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	364980
5°	367723
10°	372313
15°	381673
20°	384479
25°	373477
30°	342424
35°	281760
40°	205376
45°	133305
50°	75164
55°	35676
60°	14086
65°	8727
70°	5914
75°	3908
80°	1918
85°	3821



TEST NUMBER: P580565  
 CATALOG NUMBER: HCC4S40D010BZ-HM43040830-41WDH

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	283.6	6.5
10°-20°	842.6	19.4
20°-30°	1249.8	28.8
30°-40°	1154.4	26.6
40°-50°	602.8	13.9
50°-60°	165.2	3.8
60°-70°	31.8	0.7
70°-80°	9.0	0.2
80°-90°	1.8	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	2376.1	54.7
0°-40°	3530.5	81.3
0°-60°	4298.4	99.0
0°-90°	4341.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	4341.0	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	2959	
5°	2970	284
15°	2989	843
25°	2744	1250
35°	1871	1154
45°	764	603
55°	166	165
65°	30	32
75°	8	9
85°	3	2
90°	0	



TEST NUMBER: P580565  
CATALOG NUMBER: HCC4S40D010BZ-HM43040830-41WDH

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	2959.0
2.5°	2950.8
5°	2969.9
7.5°	2978.0
10°	2972.6
12.5°	2978.0
15°	2988.9
17.5°	2978.0
20°	2929.1
22.5°	2850.3
25°	2744.2
27.5°	2600.0
30°	2404.2
32.5°	2156.7
35°	1871.2
37.5°	1572.0
40°	1275.5
42.5°	1003.5
45°	764.2
47.5°	560.3
50°	391.7
52.5°	261.1
55°	165.9
57.5°	97.9
60°	57.1
62.5°	40.8
65°	29.9
67.5°	21.7
70°	16.4
72.5°	10.9
75°	8.2
77.5°	5.5
80°	2.7
82.5°	2.7
85°	2.7
87.5°	0.0
90°	0.0

Classified  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Classified  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report





Classified  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Classified  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Classified  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Classified  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)