

Classified
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: HALO COMMERCIAL

Report Number: P593164

Luminaire Tested: **HCC6S25D010MB-HM60525850-61WDH**

Issue Date: 9/16/2021

Test Information

Test Method: LM-41-14
Report Number: P593164
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-2105-241-8)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 9/16/2021
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: HALO COMMERCIAL
Catalog Number: HCC6S25D010MB-HM60525850-61WDH
Description: HALO COMMERCIAL 6" ROUND, NEW CONSTRUCTION FRAME, WITH 6" WIDE DISTRIBUTION, HAZE TRIM
Light Source: (1) HIGH LUMEN LED 80CRI / 5000K CCT
CYLINDER
Ballast/Driver: ELECTRONIC DRIVER

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 2871.3 lumens
Efficiency: N/A
Efficacy: 107.1 lumens/watt
Spacing Criteria (0/90/45): 1.18 / 1.18 / 1.08
Luminous Opening: Circular (Dia: 0.5' x H: 0')
CIE Type: Direct

Input Watts (W): 26.8
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P593164
CATALOG NUMBER: HCC6S25D010MB-HM60525850-61WDH

Luminous Intensity Polar Plot

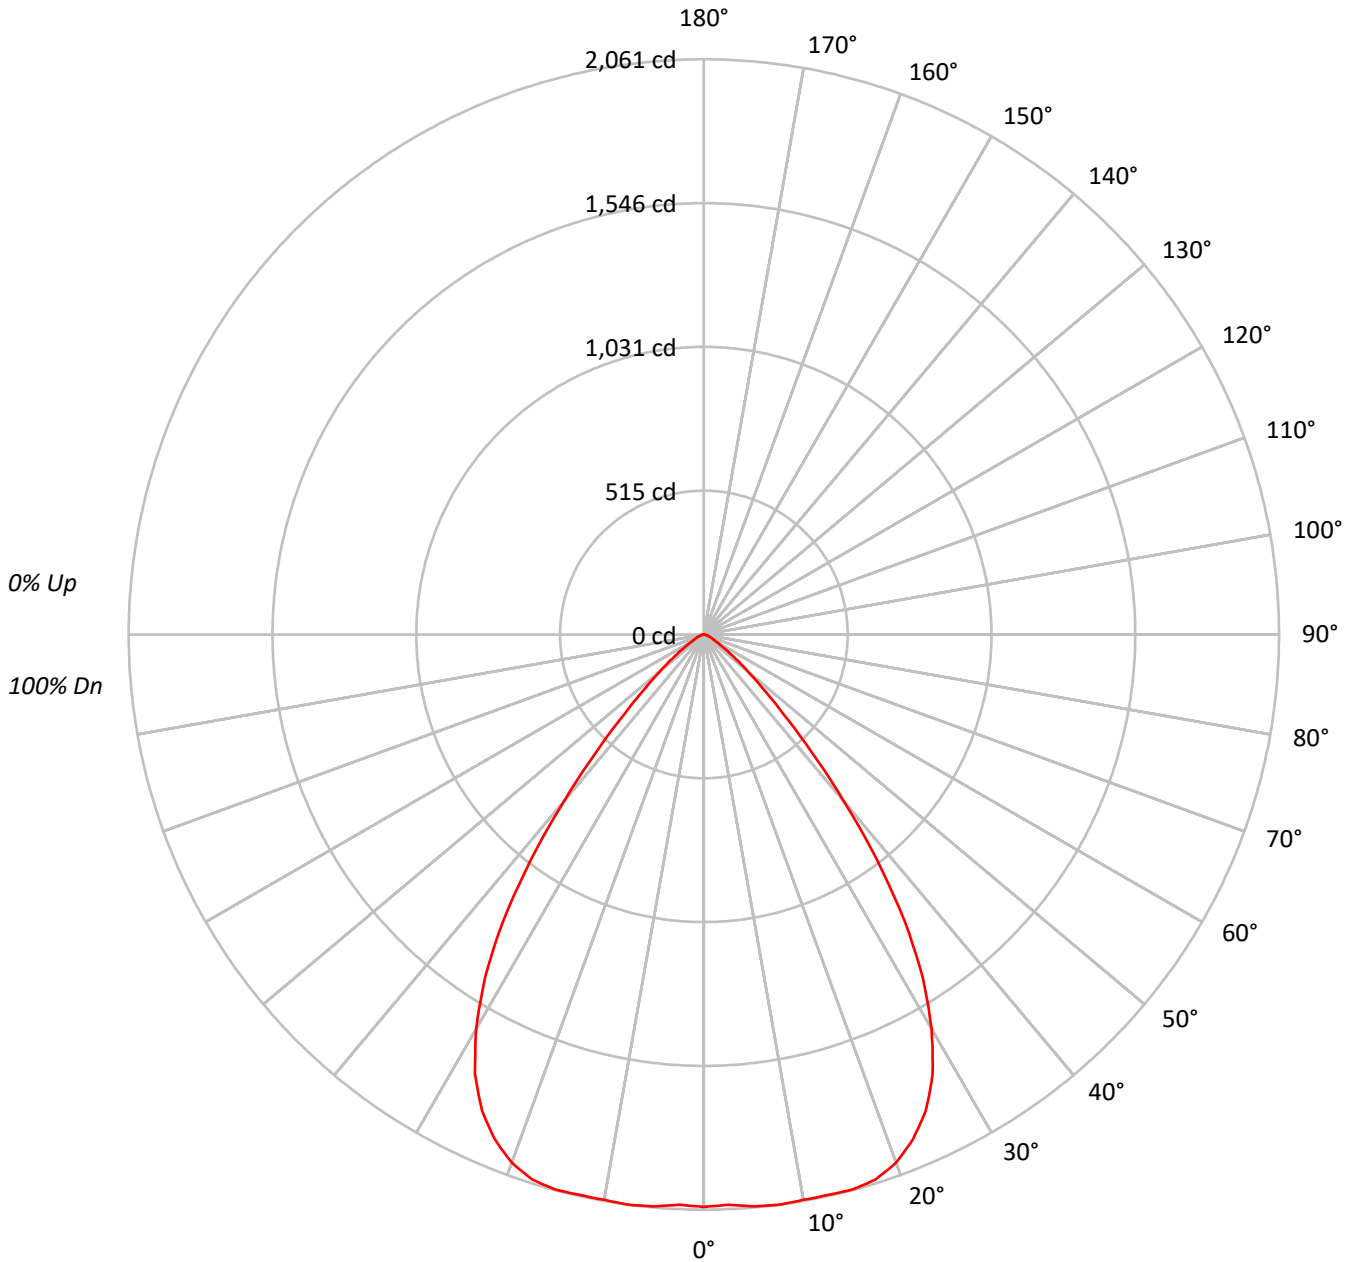



TEST NUMBER: P593164

CATALOG NUMBER: HCC6S25D010MB-HM60525850-61WDH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									20									20
RC	80									50									30									10									0									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR	0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	100	100	98	97	96	95	94	92	92	92	84																
	1	113	110	107	105	110	108	105	103	103	101	100	100	98	97	96	95	94	92	92	92	90	88	86	84	81	78	77	77	77																
	2	106	101	96	93	104	99	95	92	96	92	90	93	90	88	90	88	86	84	84	81	78	77	77	77	77	77	77	77	77																
	3	100	93	87	83	98	91	86	82	89	84	81	86	83	80	84	81	78	77	77	77	77	77	77	77	77	77	77	77	77																
	4	94	86	79	75	92	85	79	74	82	77	73	80	76	72	78	75	72	70	70	70	70	70	70	70	70	70	70	70	70																
	5	89	79	73	68	87	78	72	68	76	71	67	75	70	66	73	69	66	64	64	64	64	64	64	64	64	64	64	64	64																
	6	83	73	67	62	82	73	66	62	71	65	61	70	65	61	68	64	60	59	59	59	59	59	59	59	59	59	59	59	59																
	7	79	68	62	57	77	68	61	57	66	60	56	65	60	56	64	59	56	54	54	54	54	54	54	54	54	54	54	54	54																
	8	74	64	57	52	73	63	57	52	62	56	52	61	56	52	60	55	51	50	50	50	50	50	50	50	50	50	50	50	50																
	9	70	59	53	48	69	59	53	48	58	52	48	57	52	48	56	51	48	46	46	46	46	46	46	46	46	46	46	46	46																
	10	66	56	49	45	65	55	49	45	54	49	45	53	48	45	53	48	44	43	43	43	43	43	43	43	43	43	43	43	43																

AVERAGE LUMINANCE (cd/sqm):

	0°	112447
	5°	113190
	10°	114499
	15°	116851
	20°	117505
	25°	113843
	30°	103288
	35°	83975
	40°	55740
	45°	31019
	50°	17398
	55°	9653
	60°	5329
	65°	4034
	70°	2805
	75°	2076
	80°	1231
	85°	1258



TEST NUMBER: P593164
 CATALOG NUMBER: HCC6S25D010MB-HM60525850-61WDH

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	196.3	6.8
10°-20°	580.5	20.2
20°-30°	855.7	29.8
30°-40°	765.3	26.7
40°-50°	332.0	11.6
50°-60°	97.6	3.4
60°-70°	31.1	1.1
70°-80°	11.1	0.4
80°-90°	1.6	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1632.5	56.9
0°-40°	2397.8	83.5
0°-60°	2827.4	98.5
0°-90°	2871.3	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	2871.3	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	2051	
5°	2057	196
15°	2059	581
25°	1882	856
35°	1255	765
45°	400	332
55°	101	98
65°	31	31
75°	10	11
85°	2	2
90°	0	



TEST NUMBER: P593164

CATALOG NUMBER: HCC6S25D010MB-HM60525850-61WDH

CANDELA DISTRIBUTION (FULL):

	0°
0°	2051.2
2.5°	2045.3
5°	2056.9
7.5°	2060.8
10°	2056.9
12.5°	2056.9
15°	2058.9
17.5°	2047.3
20°	2014.2
22.5°	1957.9
25°	1882.1
27.5°	1775.4
30°	1631.7
32.5°	1460.6
35°	1254.8
37.5°	1019.7
40°	778.9
42.5°	569.1
45°	400.1
47.5°	285.6
50°	204.0
52.5°	145.7
55°	101.0
57.5°	68.0
60°	48.6
62.5°	38.8
65°	31.1
67.5°	23.3
70°	17.5
72.5°	13.7
75°	9.8
77.5°	7.8
80°	3.9
82.5°	2.0
85°	2.0
87.5°	0.0
90°	0.0

Classified
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Classified
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Classified
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Classified
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Classified
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Classified
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)