

Classified  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269



Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: HALO COMMERCIAL

Report Number: P582497

Luminaire Tested: **HCC6W40D010MW-HM63040927-61WDC**

Issue Date: 9/16/2021

**Test Information**

Test Method: LM-41-14  
Report Number: P582497  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-2105-241-7)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 9/16/2021  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: HALO COMMERCIAL  
Catalog Number: HCC6W40D010MW-HM63040927-61WDC  
Description: HALO COMMERCIAL 6" ROUND, NEW CONSTRUCTION FRAME, WITH 6" WIDE DISTRIBUTION, SPECULAR TRIM  
Light Source: (1) HIGH LUMEN LED 90CRI / 2700K CCT CYLINDER  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**


Lumens per Lamp: N/A  
Luminaire Lumens: 3846.7 lumens  
Efficiency: N/A  
Efficacy: 93.8 lumens/watt  
Spacing Criteria (0/90/45): 1.28 / 1.28 / 1.09  
Luminous Opening: Circular (Dia: 0.5' x H: 0')  
CIE Type: Direct

Input Watts (W): 41  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P582497  
CATALOG NUMBER: HCC6W40D010MW-HM63040927-61WDC

### Luminous Intensity Polar Plot

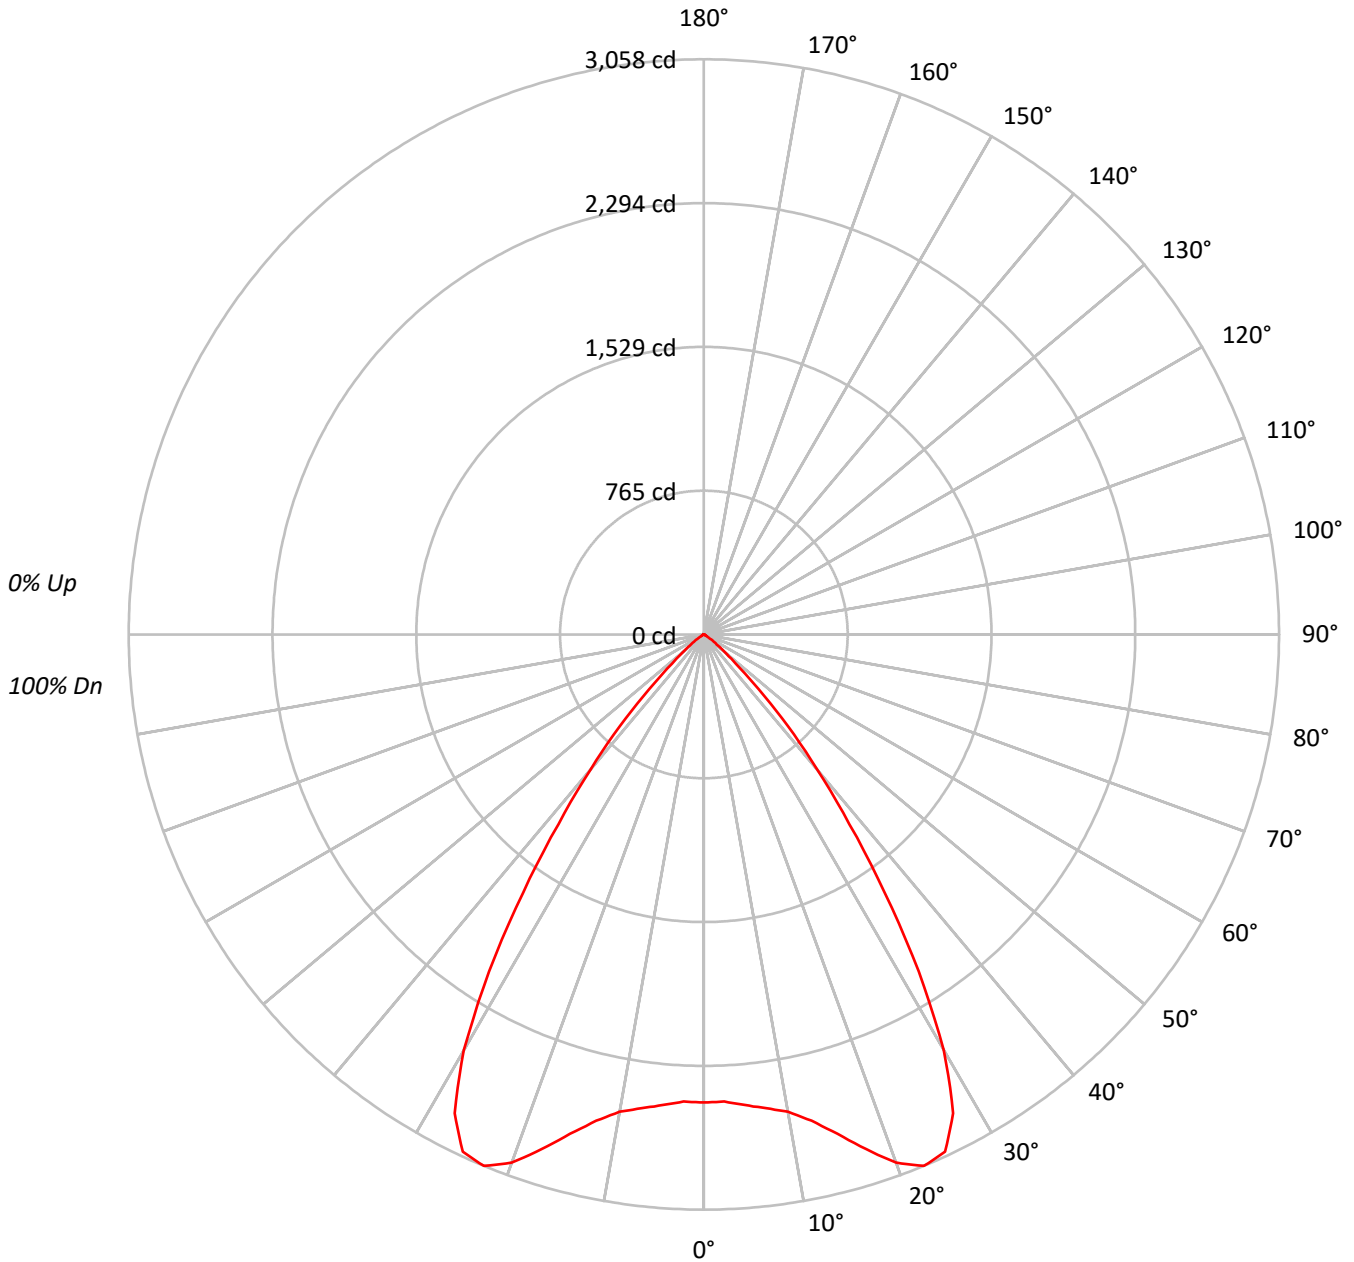



TEST NUMBER: P582497

CATALOG NUMBER: HCC6W40D010MW-HM63040927-61WDC

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20					20					20					20					20					
RC	80					70					50					30					10					0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0		
RCR																										
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100					100			
1	113	110	108	105	111	108	106	103	104	102	100	100	99	97	97	96	94	93					93			
2	107	102	97	94	105	100	96	93	97	94	91	94	91	89	91	89	87	85					85			
3	101	94	89	85	99	93	88	84	90	86	82	88	84	81	85	82	80	78					78			
4	95	87	81	77	93	86	80	76	84	79	75	82	78	74	80	76	74	72					72			
5	90	81	75	70	88	80	74	70	78	73	69	76	72	68	75	71	68	66					66			
6	85	75	69	64	83	74	68	64	73	67	63	71	67	63	70	66	62	61					61			
7	80	70	63	59	79	69	63	59	68	62	58	67	62	58	66	61	58	56					56			
8	76	65	59	54	74	65	59	54	64	58	54	62	57	54	61	57	53	52					52			
9	71	61	55	50	70	60	54	50	60	54	50	59	53	50	58	53	50	48					48			
10	68	57	51	47	67	57	51	47	56	50	46	55	50	46	54	50	46	45					45			

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	136371
5°	138207
10°	143390
15°	155937
20°	174350
25°	183507
30°	161550
35°	112049
40°	66904
45°	31802
50°	12000
55°	5018
60°	1557
65°	1232
70°	753
75°	508
80°	758
85°	0



TEST NUMBER: P582497  
 CATALOG NUMBER: HCC6W40D010MW-HM63040927-61WDC

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	241.7	6.3
10°-20°	789.0	20.5
20°-30°	1351.9	35.1
30°-40°	1049.9	27.3
40°-50°	347.1	9.0
50°-60°	53.2	1.4
60°-70°	9.4	0.2
70°-80°	3.4	0.1
80°-90°	1.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	2382.6	61.9
0°-40°	3432.6	89.2
0°-60°	3832.9	99.6
0°-90°	3846.7	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	3846.7	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	2488	
5°	2512	242
15°	2748	789
25°	3034	1352
35°	1674	1050
45°	410	347
55°	52	53
65°	10	9
75°	2	3
85°	0	1
90°	0	



TEST NUMBER: P582497  
CATALOG NUMBER: HCC6W40D010MW-HM63040927-61WDC

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	2487.6
2.5°	2485.3
5°	2511.5
7.5°	2540.1
10°	2575.9
12.5°	2647.5
15°	2747.6
17.5°	2869.4
20°	2988.6
22.5°	3057.7
25°	3033.8
27.5°	2869.4
30°	2552.1
32.5°	2125.2
35°	1674.3
37.5°	1271.3
40°	934.9
42.5°	660.7
45°	410.2
47.5°	229.0
50°	140.7
52.5°	85.9
55°	52.5
57.5°	26.2
60°	14.2
62.5°	11.9
65°	9.5
67.5°	7.1
70°	4.7
72.5°	4.7
75°	2.4
77.5°	2.4
80°	2.4
82.5°	2.4
85°	0.0
87.5°	0.0
90°	0.0

Classified  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Classified  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report





Classified  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Classified  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Classified  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Classified  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)