

Classified  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269



Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: HALO COMMERCIAL

Report Number: P582548

Luminaire Tested: **HCC6S40D010BZ-HM63040940-61RWWC**

Issue Date: 9/16/2021

**Test Information**

Test Method: LM-41-14  
Report Number: P582548  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-2105-241-14)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 9/16/2021  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: HALO COMMERCIAL  
Catalog Number: HCC6S40D010BZ-HM63040940-61RWWC  
Description: HALO COMMERCIAL 6" ROUND, NEW CONSTRUCTION FRAME, WITH 6" WALLWASH DISTRIBUTION, SPECULAR TRIM  
Light Source: (1) HIGH LUMEN LED 90CRI / 4000K CCT CYLINDER  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**


Lumens per Lamp: N/A  
Luminaire Lumens: 4292.9 lumens  
Efficiency: N/A  
Efficacy: 104.7 lumens/watt  
Spacing Criteria (0/90/45): 1.22 / 1.15 / 1.2  
Luminous Opening: Circular (Dia: 0.5' x H: 0')  
CIE Type: Direct

Input Watts (W): 41  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P582548  
CATALOG NUMBER: HCC6S40D010BZ-HM63040940-61RWWC

### Luminous Intensity Polar Plot

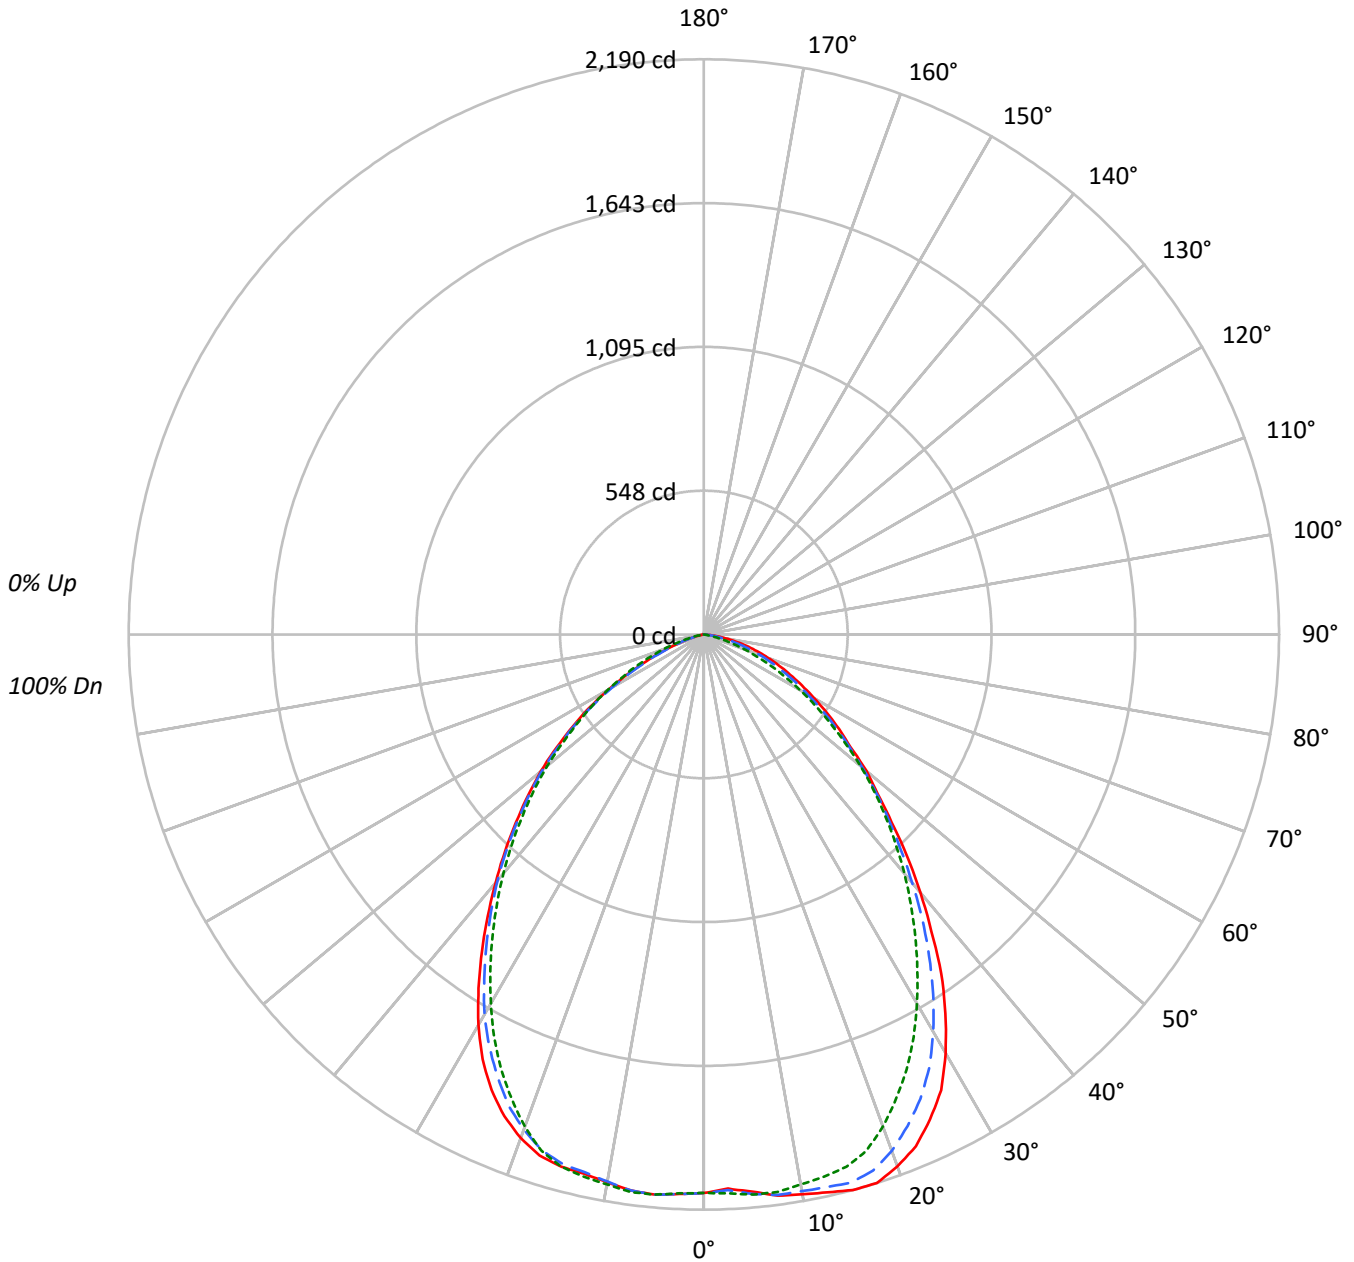

Cooper Lighting Solutions Photometric Lab  
 1121 Highway 74 South  
 Peachtree City, GA 30269



TEST NUMBER: P582548

CATALOG NUMBER: HCC6S40D010BZ-HM63040940-61RWWC

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				20	
RC	80				70				50				30				10				0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0	
RCR																						
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100				100
1	111	107	104	101	108	105	102	99	101	98	96	97	95	93	94	92	90	88				88
2	103	96	90	86	100	94	89	85	91	86	83	88	84	81	85	82	79	77				77
3	95	86	79	74	93	85	78	73	82	76	72	79	75	71	77	73	69	68				68
4	88	78	70	64	86	76	69	64	74	68	63	72	67	62	70	65	61	60				60
5	82	70	62	57	80	69	62	56	67	61	56	65	60	55	64	59	55	53				53
6	76	64	56	50	74	63	56	50	62	55	50	60	54	49	58	53	49	47				47
7	71	59	51	45	69	58	50	45	56	50	45	55	49	45	54	48	44	42				42
8	66	54	46	41	65	53	46	41	52	45	41	51	45	40	50	44	40	38				38
9	62	50	42	37	61	49	42	37	48	42	37	47	41	37	46	41	37	35				35
10	59	46	39	34	57	46	39	34	45	38	34	44	38	34	43	38	34	32				32

**AVERAGE LUMINANCE (cd/sqm):**

	0°	90°	180°
0°	116570	116570	116570
5°	117174	117802	117802
10°	120450	118368	117889
15°	124280	119047	119047
20°	125725	116315	119010
25°	123219	110492	115724
30°	116543	102680	108700
35°	105477	93906	98531
40°	91758	84952	88244
45°	78403	75721	78403
50°	68799	66343	69047
55°	60031	55893	58101
60°	53077	46433	45797
65°	47087	36632	31391
70°	41561	25854	18946
75°	35393	14636	9171
80°	26361	4546	2747
85°	14530	1824	1824



TEST NUMBER: P582548  
 CATALOG NUMBER: HCC6S40D010BZ-HM63040940-61RWWC

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	204.0	4.8
10°-20°	596.7	13.9
20°-30°	871.6	20.3
30°-40°	914.1	21.3
40°-50°	770.1	17.9
50°-60°	539.5	12.6
60°-70°	289.3	6.7
70°-80°	97.0	2.3
80°-90°	10.6	0.2
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1672.3	39.0
0°-40°	2586.4	60.2
0°-60°	3896.0	90.8
0°-90°	4292.9	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	4292.9	100.0

**CANDELA DISTRIBUTION:**

	0°	45°	90°	135°	180°	Flux
0°	2126	2126	2126	2126	2126	
5°	2129	2138	2141	2141	2141	205
15°	2190	2161	2098	2086	2098	618
25°	2037	1951	1827	1858	1913	933
35°	1576	1495	1403	1444	1472	978
45°	1011	994	977	1003	1011	788
55°	628	608	585	596	608	565
65°	363	331	282	233	242	363
75°	167	130	69	43	43	177
85°	23	12	3	3	3	32
90°	0	0	0	0	0	

Cooper Lighting Solutions Photometric Lab  
 1121 Highway 74 South  
 Peachtree City, GA 30269



TEST NUMBER: P582548

CATALOG NUMBER: HCC6S40D010BZ-HM63040940-61RWWC

**CANDELA DISTRIBUTION (FULL):**

	0°	22.5°	45°	67.5°	90°	112.5°	135°	157.5°	180°
0°	2126.4	2126.4	2126.4	2126.4	2126.4	2126.4	2126.4	2126.4	2126.4
2.5°	2112.0	2112.0	2117.8	2123.5	2129.3	2129.3	2132.2	2135.1	2132.2
5°	2129.3	2129.3	2137.8	2140.7	2140.7	2137.8	2140.7	2140.7	2140.7
7.5°	2155.1	2149.4	2152.3	2146.5	2140.7	2137.8	2135.1	2135.1	2135.1
10°	2163.8	2158.0	2152.3	2140.7	2126.4	2117.8	2114.9	2117.8	2117.8
12.5°	2175.3	2169.6	2155.1	2132.2	2114.9	2100.4	2097.6	2103.3	2103.3
15°	2189.8	2184.0	2160.9	2123.5	2097.6	2083.1	2086.0	2091.8	2097.6
17.5°	2189.8	2178.2	2140.7	2091.8	2060.1	2045.6	2057.2	2071.6	2080.3
20°	2155.1	2143.6	2091.8	2031.3	1993.8	1985.2	2005.4	2031.3	2040.0
22.5°	2109.1	2086.0	2025.6	1953.4	1913.2	1913.2	1942.0	1973.6	1985.2
25°	2037.1	2019.8	1950.7	1867.0	1826.7	1823.8	1858.5	1901.6	1913.2
27.5°	1956.3	1933.3	1858.5	1771.9	1728.8	1731.6	1769.0	1812.3	1823.8
30°	1841.1	1812.3	1746.1	1662.5	1622.1	1633.7	1671.2	1702.8	1717.2
32.5°	1711.4	1685.6	1625.0	1547.2	1512.6	1524.2	1555.9	1584.6	1596.3
35°	1576.1	1547.2	1495.4	1426.2	1403.2	1414.8	1443.5	1466.6	1472.3
37.5°	1423.3	1403.2	1365.7	1311.0	1293.7	1308.1	1331.1	1345.5	1351.3
40°	1282.2	1264.9	1233.1	1192.9	1187.1	1198.6	1221.7	1230.2	1233.1
42.5°	1143.8	1129.5	1109.3	1080.5	1080.5	1092.0	1112.2	1118.0	1120.8
45°	1011.3	1002.7	994.0	971.0	976.7	991.1	1002.7	1011.3	1011.3
47.5°	896.1	898.9	887.4	870.1	875.9	890.3	898.9	907.6	907.6
50°	806.7	798.1	786.5	769.2	777.9	789.4	801.0	806.7	809.6
52.5°	703.0	700.1	691.6	671.4	677.0	682.8	694.3	703.0	705.9
55°	628.1	619.5	607.9	584.8	584.8	590.6	596.5	602.1	607.9
57.5°	556.1	547.4	530.1	504.3	501.4	501.4	498.5	504.3	512.8
60°	484.1	481.2	455.2	432.2	423.5	415.0	403.4	406.3	417.7
62.5°	420.6	415.0	391.9	363.0	345.7	331.3	317.0	314.1	325.5
65°	363.0	357.3	331.3	302.6	282.4	256.4	233.3	233.3	242.0
67.5°	311.2	299.7	276.6	244.9	219.0	187.3	164.2	170.0	172.9
70°	259.3	250.6	224.8	193.1	161.3	129.7	115.3	118.2	118.2
72.5°	213.2	201.7	175.7	144.0	112.4	83.5	77.8	74.9	74.9
75°	167.1	155.6	129.7	98.0	69.1	48.9	43.3	43.3	43.3
77.5°	121.0	112.4	89.3	60.5	37.5	23.1	20.2	17.3	17.3
80°	83.5	74.9	54.7	31.7	14.4	8.7	8.7	8.7	8.7
82.5°	48.9	40.4	26.0	14.4	5.8	2.9	2.9	2.9	2.9
85°	23.1	17.3	11.5	5.8	2.9	2.9	2.9	2.9	2.9
87.5°	2.9	2.9	2.9	0.0	0.0	0.0	0.0	0.0	0.0
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Classified  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Classified  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report





Classified  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°    - - 45°-225°    - - - - 90°-270°

Classified  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Classified  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Classified  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)