

Classified
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: HALO COMMERCIAL

Report Number: P593372

Luminaire Tested: **HCC6W50D010BZ-HM64560950-61RWWH**

Issue Date: 9/16/2021

Test Information

Test Method: LM-41-14
Report Number: P593372
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-2105-241-15)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 9/16/2021
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: HALO COMMERCIAL
Catalog Number: HCC6W50D010BZ-HM64560950-61RWWH
Description: HALO COMMERCIAL 6" ROUND, NEW CONSTRUCTION FRAME, WITH 6" WALLWASH DISTRIBUTION, HAZE TRIM
Light Source: (1) HIGH LUMEN LED 90CRI / 5000K CCT
CYLINDER
Ballast/Driver: ELECTRONIC DRIVER

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 5005.0 lumens
Efficiency: N/A
Efficacy: 104.3 lumens/watt
Spacing Criteria (0/90/45): 1.19 / 1.12 / 1.19
Luminous Opening: Circular (Dia: 0.5' x H: 0')
CIE Type: Direct

Input Watts (W): 48
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P593372
CATALOG NUMBER: HCC6W50D010BZ-HM64560950-61RWWH

Luminous Intensity Polar Plot

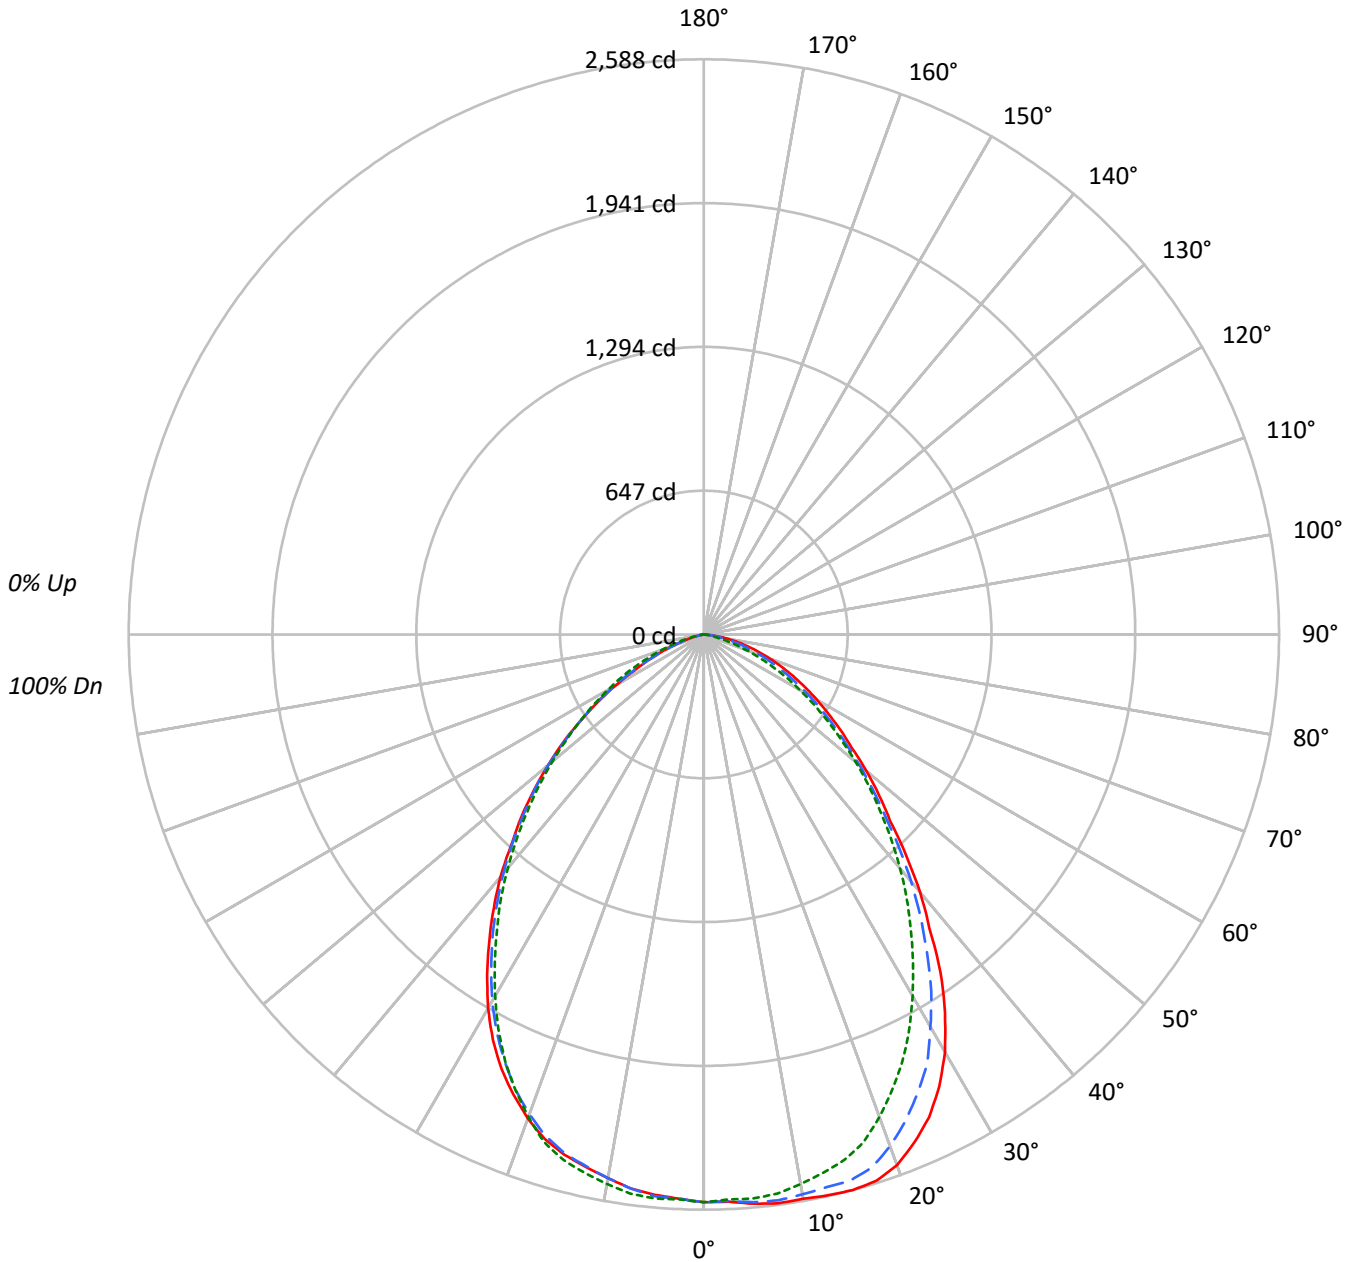

Cooper Lighting Solutions Photometric Lab
 1121 Highway 74 South
 Peachtree City, GA 30269



TEST NUMBER: P593372

CATALOG NUMBER: HCC6W50D010BZ-HM64560950-61RWWH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20					20					20					20					20					
RC	80					70					50					30					10					0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0		
RCR																										
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100					100			
1	111	107	104	101	108	105	102	99	101	98	96	97	95	93	93	92	90	88					88			
2	103	96	90	85	100	94	89	84	91	86	83	87	84	81	85	82	79	77					77			
3	95	86	79	74	93	84	78	73	82	76	72	79	74	70	77	73	69	67					67			
4	88	78	70	64	86	76	69	64	74	68	63	72	66	62	70	65	61	59					59			
5	82	70	62	57	80	69	62	56	67	61	56	65	60	55	64	59	55	53					53			
6	76	64	56	50	74	63	56	50	61	55	50	60	54	49	58	53	49	47					47			
7	71	59	51	45	69	58	50	45	56	50	45	55	49	44	54	48	44	42					42			
8	66	54	46	41	65	53	46	41	52	45	41	51	45	40	50	44	40	38					38			
9	62	50	42	37	61	49	42	37	48	42	37	47	41	37	46	41	37	35					35			
10	59	46	39	34	57	46	39	34	45	38	34	44	38	34	43	38	34	32					32			

AVERAGE LUMINANCE (cd/sqm):

	0°	90°	180°
0°	140027	140027	140027
5°	141481	140188	139269
10°	143490	139760	138274
15°	146862	138888	137549
20°	148232	134756	135141
25°	144988	127979	130405
30°	137319	118879	122911
35°	124336	108656	112692
40°	108281	98227	101819
45°	91870	86947	90056
50°	81370	75946	77942
55°	71663	64944	64629
60°	64238	54700	50281
65°	57321	43857	36048
70°	50441	31656	22552
75°	42552	19126	12751
80°	32769	8461	5304
85°	18933	2076	2076

Classified

Scaled Data Report

Cooper Lighting Solutions Photometric Lab

1121 Highway 74 South

Peachtree City, GA 30269



TEST NUMBER: P593372

CATALOG NUMBER: HCC6W50D010BZ-HM64560950-61RWWH

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	242.5	4.8
10°-20°	696.8	13.9
20°-30°	1007.3	20.1
30°-40°	1059.9	21.2
40°-50°	891.0	17.8
50°-60°	625.4	12.5
60°-70°	344.0	6.9
70°-80°	122.2	2.4
80°-90°	16.0	0.3
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1946.6	38.9
0°-40°	3006.5	60.1
0°-60°	4522.9	90.4
0°-90°	5005.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	5005.0	100.0

CANDELA DISTRIBUTION:

	0°	45°	90°	135°	180°	Flux
0°	2554	2554	2554	2554	2554	
5°	2571	2564	2548	2538	2531	246
15°	2588	2544	2447	2417	2424	730
25°	2397	2276	2116	2119	2156	1097
35°	1858	1751	1624	1657	1684	1152
45°	1185	1152	1122	1148	1162	930
55°	750	710	680	680	676	675
65°	442	395	338	278	278	440
75°	201	161	90	60	60	216
85°	30	17	3	3	3	41
90°	0	0	0	0	0	



TEST NUMBER: P593372

CATALOG NUMBER: HCC6W50D010BZ-HM64560950-61RWWH

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°	112.5°	135°	157.5°	180°
0°	2554.3	2554.3	2554.3	2554.3	2554.3	2554.3	2554.3	2554.3	2554.3
2.5°	2554.3	2554.3	2551.0	2551.0	2544.2	2544.2	2540.9	2540.9	2540.9
5°	2571.0	2571.0	2564.3	2554.3	2547.5	2537.5	2537.5	2534.2	2530.8
7.5°	2581.1	2577.7	2567.6	2554.3	2537.5	2520.7	2514.1	2517.4	2514.1
10°	2577.7	2571.0	2557.6	2530.8	2510.7	2487.3	2484.0	2480.6	2484.0
12.5°	2584.4	2574.3	2547.5	2514.1	2480.6	2453.9	2450.5	2450.5	2453.9
15°	2587.7	2577.7	2544.2	2494.0	2447.2	2420.3	2417.0	2420.3	2423.6
17.5°	2577.7	2564.3	2514.1	2447.2	2393.5	2366.8	2366.8	2373.5	2380.2
20°	2540.9	2520.7	2450.5	2370.1	2309.9	2289.8	2296.5	2309.9	2316.5
22.5°	2474.0	2450.5	2370.1	2279.8	2216.1	2199.4	2216.1	2232.9	2239.5
25°	2397.0	2370.1	2276.4	2182.7	2115.8	2095.7	2119.1	2145.9	2155.9
27.5°	2293.1	2263.0	2176.0	2068.9	2001.9	1991.9	2018.7	2048.8	2055.4
30°	2169.3	2135.8	2038.8	1938.3	1878.0	1874.7	1904.8	1931.6	1941.7
32.5°	2018.7	1988.4	1904.8	1804.3	1750.8	1750.8	1780.9	1804.3	1814.4
35°	1857.9	1824.5	1750.8	1667.1	1623.6	1626.9	1657.1	1673.8	1683.9
37.5°	1667.1	1657.1	1600.1	1529.9	1499.8	1506.5	1529.9	1543.2	1553.3
40°	1513.1	1486.4	1449.6	1392.6	1372.6	1379.3	1402.7	1416.0	1422.8
42.5°	1345.7	1329.0	1298.9	1258.7	1245.4	1255.4	1275.5	1285.5	1282.1
45°	1185.0	1181.7	1151.6	1128.2	1121.5	1134.8	1148.3	1158.3	1161.6
47.5°	1067.9	1054.5	1027.7	1010.9	1004.3	1017.7	1031.1	1037.7	1037.7
50°	954.1	940.7	913.9	897.2	890.5	903.8	913.9	920.6	913.9
52.5°	840.3	826.8	803.4	783.4	780.1	786.7	790.1	793.4	800.1
55°	749.8	736.5	709.7	686.3	679.5	683.0	679.5	679.5	676.2
57.5°	662.8	649.4	622.6	595.9	585.9	582.5	572.4	569.1	565.7
60°	585.9	569.1	542.3	512.2	498.9	485.4	468.6	458.6	458.6
62.5°	512.2	495.4	465.3	438.5	418.4	395.0	368.2	354.9	354.9
65°	441.9	428.5	395.0	364.9	338.1	308.0	277.9	271.2	277.9
67.5°	375.0	361.5	328.1	298.0	264.4	227.7	200.9	200.9	207.5
70°	314.7	301.3	271.2	234.3	197.5	160.7	140.7	140.7	140.7
72.5°	257.8	244.3	210.9	177.4	140.7	103.8	93.8	97.1	93.8
75°	200.9	190.8	160.7	123.9	90.3	63.7	60.2	56.9	60.2
77.5°	150.7	140.7	113.8	80.3	50.2	36.8	33.4	33.4	33.4
80°	103.8	93.8	73.7	46.9	26.8	16.8	16.8	16.8	16.8
82.5°	63.7	53.6	40.2	23.4	10.0	10.0	10.0	10.0	10.0
85°	30.1	23.4	16.8	6.7	3.3	3.3	3.3	3.3	3.3
87.5°	6.7	6.7	3.3	3.3	0.0	3.3	3.3	0.0	0.0
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Classified
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Classified
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Classified
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180° - - 45°-225° - - - - 90°-270°

Classified
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Classified
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Classified
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)