

Classified  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269



Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: HALO COMMERCIAL

Report Number: P583921

Luminaire Tested: **HCC8W15D010BZ-HM80520930-81NDW**

Issue Date: 10/21/2021

**Test Information**

Test Method: LM-41-14  
Report Number: P583921  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2109-368-3)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 10/21/2021  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: HALO COMMERCIAL  
Catalog Number: HCC8W15D010BZ-HM80520930-81NDW  
Description: HALO COMMERCIAL 8" ROUND, NEW CONSTRUCTION FRAME, WITH 8" NARROW DISTRIBUTION, WHITE TRIM  
Light Source: (1) HIGH LUMEN LED 90CRI / 3000K CCT CYLINDER  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**


Lumens per Lamp: N/A  
Luminaire Lumens: 1287.1 lumens  
Efficiency: N/A  
Efficacy: 91.9 lumens/watt  
Spacing Criteria (0/90/45): 1.06 / 1.06 / 0.92  
Luminous Opening: Circular (Dia: 0.67' x H: 0')  
CIE Type: Direct

Input Watts (W): 14  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P583921  
CATALOG NUMBER: HCC8W15D010BZ-HM80520930-81NDW

### Luminous Intensity Polar Plot

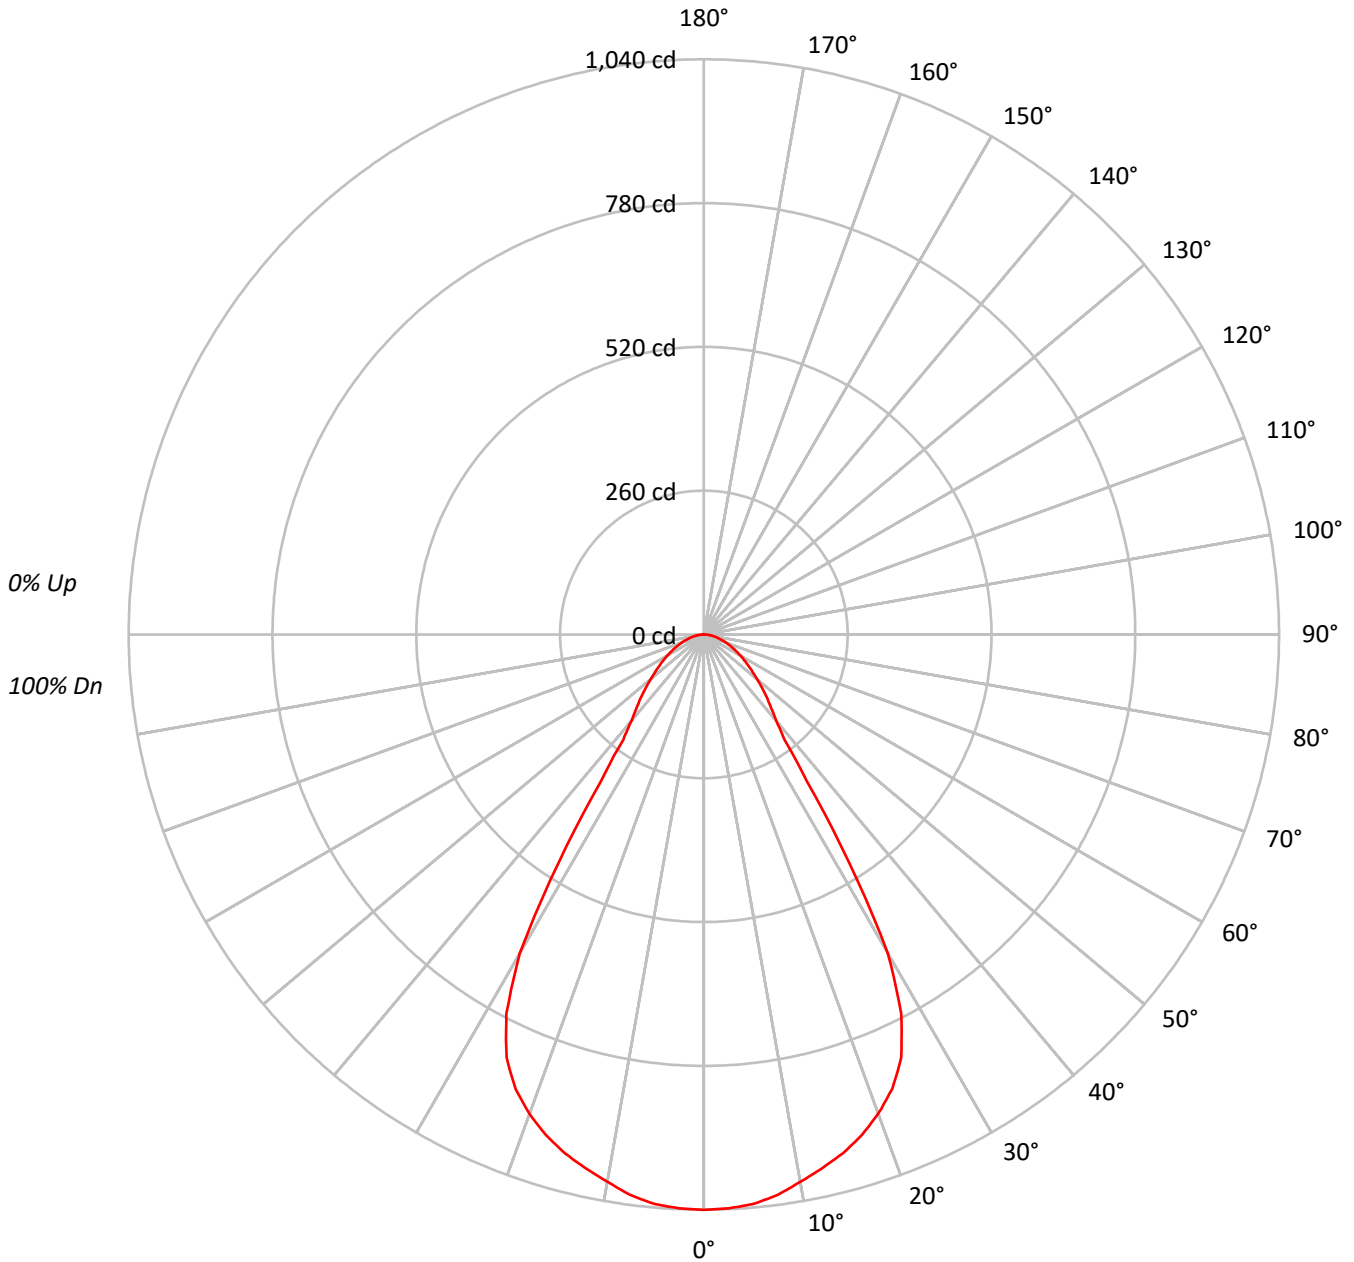



TEST NUMBER: P583921  
 CATALOG NUMBER: HCC8W15D010BZ-HM80520930-81NDW

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20									20									20									20									20								
RC	80									50									30									10									0								
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0															
RCR	0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	100	100	100	100	100	100	100	100	100	100																
	1	112	108	105	102	109	106	103	101	102	100	98	98	96	95	95	93	92	90	90	90	90	90	90	90	90	90	90	90																
	2	105	99	94	90	102	97	92	88	94	90	87	91	87	85	88	85	83	81	81	81	81	81	81	81	81	81	81	81																
	3	98	90	84	79	96	89	83	79	86	81	77	84	80	76	81	78	75	73	73	73	73	73	73	73	73	73	73	73																
	4	92	83	76	71	90	82	76	71	80	74	70	77	73	69	75	72	68	67	67	67	67	67	67	67	67	67	67	67																
	5	87	77	70	65	85	76	69	64	74	68	64	72	67	63	70	66	63	61	61	61	61	61	61	61	61	61	61	61																
	6	82	71	64	59	80	70	64	59	69	63	58	67	62	58	66	61	58	56	56	56	56	56	56	56	56	56	56	56																
	7	77	66	59	54	76	66	59	54	64	58	54	63	58	54	62	57	53	52	52	52	52	52	52	52	52	52	52	52																
	8	73	62	55	50	71	61	55	50	60	54	50	59	54	50	58	53	49	48	48	48	48	48	48	48	48	48	48	48																
	9	69	58	51	47	68	57	51	47	56	51	46	55	50	46	55	50	46	45	45	45	45	45	45	45	45	45	45	45																
	10	65	55	48	44	64	54	48	44	53	47	43	52	47	43	52	47	43	42	42	42	42	42	42	42	42	42	42	42																

**AVERAGE LUMINANCE (cd/sqm):**

	0°	32082
	5°	31994
	10°	31462
	15°	31001
	20°	30259
	25°	28723
	30°	23693
	35°	12197
	40°	8168
	45°	7004
	50°	6040
	55°	5274
	60°	4681
	65°	4210
	70°	3814
	75°	3431
	80°	3090
	85°	3078



TEST NUMBER: P583921  
 CATALOG NUMBER: HCC8W15D010BZ-HM80520930-81NDW

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	97.7	7.6
10°-20°	273.2	21.2
20°-30°	378.6	29.4
30°-40°	227.4	17.7
40°-50°	124.5	9.7
50°-60°	88.4	6.9
60°-70°	57.4	4.5
70°-80°	30.7	2.4
80°-90°	9.2	0.7
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	749.5	58.2
0°-40°	976.9	75.9
0°-60°	1189.8	92.4
0°-90°	1287.1	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1287.1	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	1040	
5°	1034	98
15°	971	273
25°	844	379
35°	324	227
45°	161	124
55°	98	88
65°	58	57
75°	29	31
85°	9	9
90°	0	



TEST NUMBER: P583921  
CATALOG NUMBER: HCC8W15D010BZ-HM80520930-81NDW

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	1040.4
2.5°	1038.5
5°	1033.6
7.5°	1022.1
10°	1004.8
12.5°	988.5
15°	971.1
17.5°	949.1
20°	922.1
22.5°	889.4
25°	844.2
27.5°	773.1
30°	665.4
32.5°	487.5
35°	324.0
37.5°	239.4
40°	202.9
42.5°	179.8
45°	160.6
47.5°	142.3
50°	125.9
52.5°	110.6
55°	98.1
57.5°	86.5
60°	75.9
62.5°	66.4
65°	57.7
67.5°	49.0
70°	42.3
72.5°	34.6
75°	28.8
77.5°	23.1
80°	17.4
82.5°	12.5
85°	8.7
87.5°	3.9
90°	0.0

Classified  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Classified  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report





Classified  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Classified  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Classified  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Classified  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)