

Classified
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: HALO COMMERCIAL

Report Number: P583991

Luminaire Tested: **HCC8W20D010MB-HM80520830-81RWWC**

Issue Date: 10/21/2021

Test Information

Test Method: LM-41-14
Report Number: P583991
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2109-368-14)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 10/21/2021
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: HALO COMMERCIAL
Catalog Number: HCC8W20D010MB-HM80520830-81RWWC
Description: HALO COMMERCIAL 8" ROUND, NEW CONSTRUCTION FRAME, WITH 8" WALLWASH DISTRIBUTION, SPECULAR TRIM
Light Source: (1) HIGH LUMEN LED 80CRI / 3000K CCT
CYLINDER
Ballast/Driver: ELECTRONIC DRIVER

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 2061.8 lumens
Efficiency: N/A
Efficacy: 103.1 lumens/watt
Spacing Criteria (0/90/45): 1.15 / 1.08 / 1.17
Luminous Opening: Circular (Dia: 0.67' x H: 0')
CIE Type: Direct

Input Watts (W): 20
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P583991
CATALOG NUMBER: HCC8W20D010MB-HM80520830-81RWWC

Luminous Intensity Polar Plot

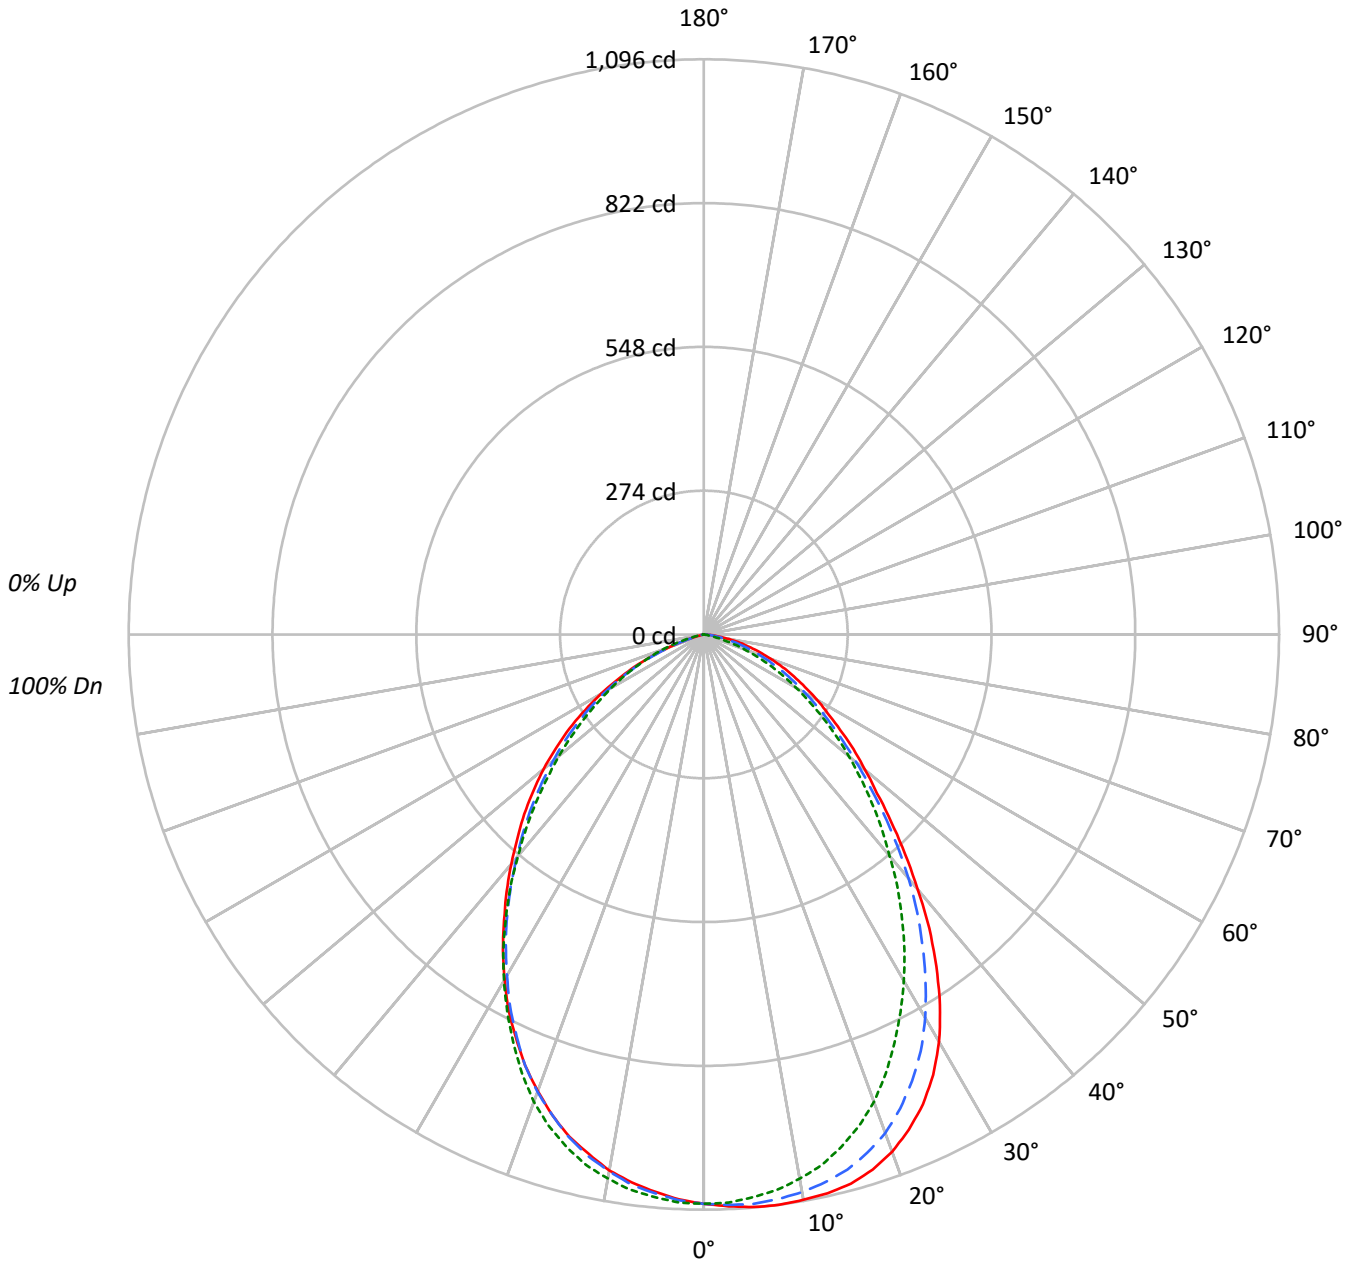



TEST NUMBER: P583991

CATALOG NUMBER: HCC8W20D010MB-HM80520830-81RWWC

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20					20					20					20					20					
RC	80					70					50					30					10					0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0		
RCR																										
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100					100			
1	111	107	104	101	108	105	102	99	101	98	96	97	95	93	93	92	90	88					88			
2	103	96	90	85	100	94	89	84	91	86	82	87	84	81	84	82	79	77					77			
3	95	86	79	73	93	84	78	73	82	76	72	79	74	70	76	73	69	67					67			
4	88	77	70	64	86	76	69	64	74	68	63	72	66	62	69	65	61	59					59			
5	81	70	62	56	80	69	62	56	67	61	56	65	59	55	63	58	54	52					52			
6	76	64	56	50	74	63	55	50	61	55	50	60	54	49	58	53	49	47					47			
7	71	59	51	45	69	58	50	45	56	50	45	55	49	44	54	48	44	42					42			
8	66	54	46	41	65	53	46	41	52	45	40	51	45	40	50	44	40	38					38			
9	62	50	42	37	61	49	42	37	48	42	37	47	41	37	46	41	37	35					35			
10	58	46	39	34	57	46	39	34	45	38	34	44	38	34	43	38	34	32					32			

AVERAGE LUMINANCE (cd/sqm):

	0°	90°	180°
0°	33451	33451	33451
5°	33895	33313	32997
10°	34243	32968	32474
15°	34587	32275	31630
20°	34413	31086	30371
25°	33609	29220	28829
30°	31921	27125	27025
35°	29061	24751	24969
40°	25481	22152	22973
45°	21979	19707	21098
50°	19247	17299	19108
55°	17053	14870	16822
60°	15369	12507	13938
65°	13841	10040	10675
70°	12144	7312	5869
75°	10353	3801	1549
80°	7973	1030	249
85°	5130	0	0



TEST NUMBER: P583991

CATALOG NUMBER: HCC8W20D010MB-HM80520830-81RWWC

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	102.4	5.0
10°-20°	287.7	14.0
20°-30°	408.4	19.8
30°-40°	429.9	20.9
40°-50°	365.7	17.7
50°-60°	264.3	12.8
60°-70°	150.3	7.3
70°-80°	47.4	2.3
80°-90°	5.8	0.3
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	798.5	38.7
0°-40°	1228.4	59.6
0°-60°	1858.4	90.1
0°-90°	2061.8	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	2061.8	100.0

CANDELA DISTRIBUTION:

	0°	45°	90°	135°	180°	Flux
0°	1085	1085	1085	1085	1085	
5°	1095	1089	1076	1069	1066	104
15°	1083	1056	1011	992	991	305
25°	988	938	859	844	847	452
35°	772	727	658	653	663	480
45°	504	485	452	464	484	392
55°	317	294	277	292	313	286
65°	190	164	138	136	146	188
75°	87	67	32	14	13	94
85°	14	9	0	0	0	19
90°	0	0	0	0	0	

Cooper Lighting Solutions Photometric Lab
 1121 Highway 74 South
 Peachtree City, GA 30269



TEST NUMBER: P583991

CATALOG NUMBER: HCC8W20D010MB-HM80520830-81RWWC

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	22.5°	25°	30°	35°	40°	45°
0°	1084.8	1084.8	1084.8	1084.8	1084.8	1084.8	1084.8	1084.8	1084.8	1084.8	1084.8
2.5°	1090.6	1092.0	1089.2	1089.2	1092.0	1089.2	1090.6	1090.6	1089.2	1089.2	1087.8
5°	1095.0	1093.6	1093.6	1093.6	1095.0	1092.0	1090.6	1092.0	1089.2	1089.2	1089.2
7.5°	1096.4	1096.4	1095.0	1093.6	1093.6	1093.6	1092.0	1090.6	1089.2	1086.3	1084.8
10°	1093.6	1093.6	1095.0	1092.0	1092.0	1089.2	1089.2	1086.3	1086.3	1083.4	1079.0
12.5°	1090.6	1089.2	1089.2	1086.3	1086.3	1083.4	1083.4	1079.0	1077.6	1073.3	1068.9
15°	1083.4	1082.0	1079.0	1077.6	1076.2	1074.7	1071.8	1070.4	1066.0	1060.3	1055.9
17.5°	1068.9	1067.5	1066.0	1063.1	1060.3	1058.8	1057.3	1052.9	1047.1	1042.9	1035.6
20°	1048.7	1047.1	1047.1	1042.9	1041.3	1037.1	1035.6	1029.8	1025.5	1016.8	1011.0
22.5°	1021.1	1022.5	1019.7	1016.8	1013.9	1009.5	1006.6	1000.8	993.6	985.0	977.6
25°	987.8	989.2	986.4	983.4	979.2	976.2	973.4	964.6	957.4	947.3	938.5
27.5°	945.8	945.8	945.8	942.9	935.7	934.3	931.3	922.7	912.5	903.8	895.1
30°	896.5	895.1	895.1	890.8	887.9	882.1	877.8	870.5	863.2	853.0	843.0
32.5°	837.2	838.6	834.3	831.4	827.0	827.0	821.3	815.5	806.7	796.7	786.5
35°	772.0	773.5	770.5	769.1	761.8	760.4	759.0	751.8	746.0	738.6	727.0
37.5°	705.4	703.9	702.5	702.5	698.1	695.3	692.3	688.0	679.3	673.5	667.7
40°	633.0	633.0	633.0	631.5	630.0	627.2	625.8	622.8	617.0	611.2	606.8
42.5°	567.7	567.7	566.3	564.9	561.9	563.5	560.5	557.7	551.9	547.5	544.5
45°	504.0	504.0	504.0	505.5	502.6	498.2	498.2	495.4	492.4	489.6	485.2
47.5°	447.5	451.9	449.0	447.5	449.0	443.2	443.2	440.3	437.5	434.5	428.7
50°	401.2	401.2	401.2	398.3	396.9	396.9	392.5	389.6	388.2	385.3	379.4
52.5°	359.2	356.3	356.3	354.8	353.4	350.5	350.5	347.6	341.8	338.9	334.6
55°	317.2	317.2	315.7	314.3	312.9	311.5	309.9	305.7	302.7	298.3	294.1
57.5°	279.5	282.4	281.0	278.1	275.2	275.2	272.3	269.4	265.0	260.7	256.4
60°	249.2	247.6	247.6	246.2	243.4	241.8	240.4	236.0	231.8	227.4	223.0
62.5°	217.3	217.3	217.3	214.4	211.5	210.0	208.6	205.7	199.9	195.5	192.7
65°	189.7	188.3	186.9	185.3	183.9	181.1	179.5	176.7	172.3	168.0	163.7
67.5°	162.2	160.8	160.8	159.3	155.0	153.5	153.5	149.2	144.8	140.5	136.2
70°	134.7	134.7	134.7	131.8	130.4	129.0	127.4	124.6	120.2	115.8	111.6
72.5°	111.6	110.0	110.0	108.6	104.3	102.8	101.4	98.5	94.1	91.3	88.3
75°	86.9	86.9	85.5	84.0	82.5	81.1	79.7	76.7	72.5	68.1	66.7
77.5°	66.7	65.1	65.1	63.7	60.9	59.3	59.3	56.5	52.1	49.3	46.3
80°	44.9	46.3	44.9	43.5	42.0	40.5	39.1	37.7	34.8	31.9	29.0
82.5°	27.5	29.0	27.5	27.5	26.1	24.6	24.6	21.7	20.3	18.8	17.4
85°	14.5	14.5	14.5	14.5	13.0	13.0	13.0	11.6	10.2	8.7	8.7
87.5°	4.4	5.8	4.4	4.4	4.4	4.4	4.4	4.4	3.0	3.0	3.0
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Cooper Lighting Solutions Photometric Lab
 1121 Highway 74 South
 Peachtree City, GA 30269



TEST NUMBER: P583991

CATALOG NUMBER: HCC8W20D010MB-HM80520830-81RWWC

CANDELA DISTRIBUTION (continued):

	50°	55°	60°	65°	67.5°	70°	75°	80°	85°	90°	95°
0°	1084.8	1084.8	1084.8	1084.8	1084.8	1084.8	1084.8	1084.8	1084.8	1084.8	1084.8
2.5°	1089.2	1087.8	1086.3	1086.3	1086.3	1086.3	1086.3	1084.8	1083.4	1083.4	1083.4
5°	1086.3	1086.3	1086.3	1084.8	1083.4	1083.4	1080.5	1079.0	1077.6	1076.2	1074.7
7.5°	1083.4	1080.5	1079.0	1077.6	1076.2	1076.2	1073.3	1070.4	1070.4	1067.5	1064.6
10°	1074.7	1073.3	1070.4	1067.5	1066.0	1064.6	1061.7	1057.3	1055.9	1052.9	1050.1
12.5°	1064.6	1061.7	1058.8	1052.9	1051.5	1050.1	1044.3	1039.9	1037.1	1035.6	1028.3
15°	1051.5	1045.7	1041.3	1034.1	1032.7	1029.8	1025.5	1021.1	1015.3	1011.0	1008.1
17.5°	1028.3	1022.5	1015.3	1008.1	1005.2	1005.2	998.0	992.2	985.0	982.0	976.2
20°	1000.8	993.6	987.8	979.2	974.8	970.4	966.0	957.4	951.6	947.3	940.0
22.5°	969.0	958.8	951.6	942.9	935.7	931.3	924.1	916.9	909.5	905.3	899.5
25°	928.5	919.7	908.1	899.5	895.1	889.3	880.6	873.4	866.2	858.8	856.0
27.5°	883.5	872.0	861.8	851.6	847.3	843.0	832.8	824.1	818.3	811.1	808.3
30°	834.3	822.7	811.1	802.5	798.1	790.9	785.1	774.9	767.7	761.8	754.6
32.5°	777.8	769.1	759.0	746.0	743.0	737.2	728.6	724.2	715.5	711.2	705.4
35°	717.0	711.2	701.0	690.9	686.5	683.7	676.5	667.7	661.9	657.5	654.7
37.5°	659.0	651.8	641.6	634.4	631.5	627.2	618.4	614.2	608.4	605.4	599.6
40°	596.8	589.5	582.3	577.9	573.5	570.7	564.9	560.5	554.7	550.3	548.9
42.5°	535.9	531.5	525.8	520.0	518.5	514.2	511.3	507.0	502.6	501.2	496.8
45°	480.8	476.5	470.7	464.9	463.5	460.6	459.1	454.8	451.9	451.9	451.9
47.5°	425.9	421.5	415.7	412.8	414.3	408.5	408.5	407.0	404.1	404.1	405.5
50°	376.6	370.8	369.4	366.4	363.6	360.6	362.0	357.8	357.8	360.6	359.2
52.5°	330.3	324.5	323.0	320.1	318.7	318.7	317.2	317.2	315.7	317.2	317.2
55°	288.3	283.9	281.0	278.1	276.6	276.6	276.6	275.2	273.8	276.6	278.1
57.5°	250.6	249.2	246.2	241.8	240.4	239.0	237.6	237.6	237.6	237.6	239.0
60°	217.3	214.4	211.5	207.1	207.1	205.7	204.2	202.8	202.8	202.8	202.8
62.5°	188.3	183.9	179.5	176.7	175.3	173.8	172.3	169.5	169.5	169.5	169.5
65°	159.3	155.0	152.1	149.2	146.3	146.3	143.4	142.0	139.0	137.6	134.7
67.5°	131.8	129.0	126.0	121.6	120.2	118.8	115.8	114.4	110.0	108.6	107.2
70°	107.2	102.8	100.0	97.0	95.6	92.7	89.8	86.9	84.0	81.1	78.2
72.5°	84.0	79.7	76.7	73.9	70.9	70.9	66.7	63.7	59.3	56.5	52.1
75°	62.3	57.9	55.1	50.7	49.3	47.8	43.5	40.5	36.2	31.9	29.0
77.5°	42.0	39.1	36.2	31.9	29.0	29.0	24.6	21.7	18.8	14.5	13.0
80°	26.1	23.2	20.3	17.4	17.4	14.5	13.0	10.2	7.2	5.8	4.4
82.5°	14.5	13.0	11.6	8.7	8.7	7.2	5.8	4.4	3.0	1.4	1.4
85°	7.2	5.8	4.4	4.4	3.0	3.0	3.0	1.4	1.4	0.0	0.0
87.5°	3.0	1.4	1.4	1.4	1.4	1.4	0.0	0.0	0.0	0.0	0.0
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0



TEST NUMBER: P583991

CATALOG NUMBER: HCC8W20D010MB-HM80520830-81RWWC

CANDELA DISTRIBUTION (continued):

	100°	105°	110°	112.5°	115°	120°	125°	130°	135°	140°	145°
0°	1084.8	1084.8	1084.8	1084.8	1084.8	1084.8	1084.8	1084.8	1084.8	1084.8	1084.8
2.5°	1082.0	1082.0	1080.5	1080.5	1080.5	1079.0	1080.5	1079.0	1079.0	1079.0	1080.5
5°	1076.2	1073.3	1073.3	1071.8	1071.8	1070.4	1071.8	1070.4	1068.9	1067.5	1068.9
7.5°	1064.6	1061.7	1060.3	1058.8	1058.8	1058.8	1057.3	1055.9	1057.3	1052.9	1055.9
10°	1048.7	1047.1	1044.3	1042.9	1041.3	1042.9	1041.3	1038.5	1038.5	1038.5	1037.1
12.5°	1028.3	1025.5	1024.0	1022.5	1019.7	1019.7	1021.1	1018.2	1018.2	1015.3	1015.3
15°	1003.8	1000.8	998.0	998.0	995.0	995.0	993.6	993.6	992.2	990.8	990.8
17.5°	973.4	969.0	966.0	967.6	966.0	964.6	964.6	961.8	960.3	961.8	961.8
20°	937.1	934.3	931.3	932.7	929.9	928.5	929.9	925.5	926.9	926.9	926.9
22.5°	896.5	895.1	890.8	890.8	887.9	886.4	887.9	887.9	889.3	887.9	887.9
25°	851.6	848.8	845.8	845.8	844.4	843.0	844.4	845.8	844.4	845.8	845.8
27.5°	803.9	799.5	799.5	796.7	796.7	798.1	796.7	798.1	799.5	799.5	802.5
30°	751.8	750.2	748.8	747.4	747.4	748.8	748.8	748.8	750.2	753.2	753.2
32.5°	702.5	699.6	696.7	696.7	699.6	698.1	699.6	699.6	702.5	702.5	705.4
35°	648.9	648.9	646.0	647.4	647.4	647.4	647.4	650.3	653.2	654.7	657.5
37.5°	599.6	595.3	596.8	596.8	598.2	596.8	601.0	601.0	604.0	604.0	606.8
40°	546.1	546.1	547.5	546.1	547.5	547.5	550.3	553.3	554.7	557.7	559.1
42.5°	495.4	498.2	495.4	496.8	498.2	499.7	501.2	502.6	508.4	511.3	515.6
45°	449.0	450.5	451.9	453.3	451.9	454.8	456.3	459.1	463.5	464.9	466.4
47.5°	404.1	405.5	407.0	408.5	408.5	411.3	412.8	415.7	418.5	420.1	421.5
50°	360.6	363.6	365.0	365.0	366.4	369.4	372.2	372.2	375.2	379.4	381.0
52.5°	321.5	321.5	324.5	325.9	327.3	327.3	331.7	333.1	334.6	337.5	340.4
55°	278.1	282.4	283.9	283.9	286.8	289.7	291.1	292.5	292.5	298.3	298.3
57.5°	240.4	241.8	244.8	244.8	244.8	249.2	249.2	252.0	253.4	255.0	257.8
60°	202.8	205.7	205.7	207.1	205.7	208.6	210.0	212.9	214.4	215.8	217.3
62.5°	168.0	168.0	169.5	169.5	169.5	169.5	172.3	172.3	175.3	176.7	178.1
65°	134.7	134.7	134.7	134.7	134.7	134.7	134.7	134.7	136.2	136.2	139.0
67.5°	104.3	102.8	100.0	101.4	100.0	100.0	98.5	98.5	100.0	100.0	102.8
70°	75.3	73.9	70.9	70.9	69.5	68.1	66.7	65.1	63.7	63.7	63.7
72.5°	49.3	46.3	42.0	40.5	40.5	37.7	34.8	33.3	33.3	33.3	33.3
75°	24.6	21.7	18.8	17.4	17.4	14.5	16.0	14.5	14.5	14.5	14.5
77.5°	10.2	7.2	5.8	5.8	5.8	4.4	4.4	4.4	4.4	4.4	4.4
80°	3.0	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4
82.5°	1.4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
85°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
87.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Cooper Lighting Solutions Photometric Lab
 1121 Highway 74 South
 Peachtree City, GA 30269



TEST NUMBER: P583991

CATALOG NUMBER: HCC8W20D010MB-HM80520830-81RWWC

CANDELA DISTRIBUTION (continued):

	150°	155°	157.5°	160°	165°	170°	175°	180°
0°	1084.8	1084.8	1084.8	1084.8	1084.8	1084.8	1084.8	1084.8
2.5°	1079.0	1079.0	1076.2	1077.6	1077.6	1077.6	1077.6	1077.6
5°	1066.0	1067.5	1066.0	1067.5	1067.5	1066.0	1066.0	1066.0
7.5°	1052.9	1054.5	1052.9	1054.5	1054.5	1054.5	1052.9	1052.9
10°	1037.1	1037.1	1037.1	1037.1	1037.1	1035.6	1037.1	1037.1
12.5°	1015.3	1015.3	1015.3	1016.8	1016.8	1015.3	1015.3	1013.9
15°	992.2	989.2	990.8	992.2	990.8	990.8	990.8	990.8
17.5°	960.3	961.8	960.3	960.3	960.3	960.3	961.8	960.3
20°	926.9	926.9	928.5	926.9	926.9	926.9	926.9	925.5
22.5°	889.3	887.9	887.9	889.3	889.3	887.9	889.3	889.3
25°	847.3	848.8	847.3	847.3	848.8	848.8	848.8	847.3
27.5°	802.5	803.9	805.3	803.9	803.9	803.9	805.3	806.7
30°	756.0	759.0	756.0	756.0	759.0	757.5	759.0	759.0
32.5°	706.8	711.2	708.3	711.2	711.2	712.6	711.2	712.6
35°	657.5	661.9	661.9	661.9	663.3	664.8	664.8	663.3
37.5°	611.2	612.6	612.6	615.6	617.0	618.4	618.4	617.0
40°	563.5	566.3	567.7	567.7	567.7	570.7	573.5	570.7
42.5°	517.1	518.5	520.0	520.0	522.9	524.3	525.8	525.8
45°	472.2	475.0	476.5	478.0	479.4	482.4	480.8	483.8
47.5°	425.9	430.1	431.7	433.1	435.9	437.5	438.9	440.3
50°	383.8	386.8	386.8	389.6	394.0	394.0	396.9	398.3
52.5°	341.8	343.3	344.7	346.2	349.0	352.0	352.0	354.8
55°	301.3	302.7	302.7	304.1	305.7	311.5	312.9	312.9
57.5°	259.2	259.2	262.2	263.6	265.0	268.0	268.0	268.0
60°	218.7	220.2	220.2	221.6	223.0	226.0	227.4	226.0
62.5°	178.1	179.5	179.5	181.1	183.9	185.3	183.9	183.9
65°	140.5	142.0	142.0	143.4	146.3	146.3	144.8	146.3
67.5°	102.8	102.8	102.8	102.8	102.8	102.8	102.8	102.8
70°	65.1	63.7	62.3	63.7	63.7	63.7	62.3	65.1
72.5°	31.9	33.3	33.3	33.3	33.3	33.3	33.3	31.9
75°	14.5	14.5	13.0	13.0	13.0	14.5	14.5	13.0
77.5°	4.4	4.4	4.4	4.4	4.4	4.4	4.4	4.4
80°	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4
82.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
85°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
87.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Classified
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Classified
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Classified
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180° - - 45°-225° - - - - 90°-270°

Classified
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Classified
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Classified
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Classified
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Classified
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Classified
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)