

Classified
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: HALO COMMERCIAL

Report Number: P584012

Luminaire Tested: **HCC8S20D010BZ-HM80520835-81WWW**

Issue Date: 10/21/2021

Test Information

Test Method: LM-41-14
Report Number: P584012
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2109-368-16)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 10/21/2021
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: HALO COMMERCIAL
Catalog Number: HCC8S20D010BZ-HM80520835-81WWW
Description: HALO COMMERCIAL 8" ROUND, NEW CONSTRUCTION FRAME, WITH 8" WALLWASH DISTRIBUTION, WHITE TRIM
Light Source: (1) HIGH LUMEN LED 80CRI / 3500K CCT
CYLINDER
Ballast/Driver: ELECTRONIC DRIVER

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 2048.6 lumens
Efficiency: N/A
Efficacy: 102.4 lumens/watt
Spacing Criteria (0/90/45): 1.09 / 1.04 / 1.13
Luminous Opening: Circular (Dia: 0.67' x H: 0')
CIE Type: Direct

Input Watts (W): 20
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P584012
CATALOG NUMBER: HCC8S20D010BZ-HM80520835-81WWW

Luminous Intensity Polar Plot

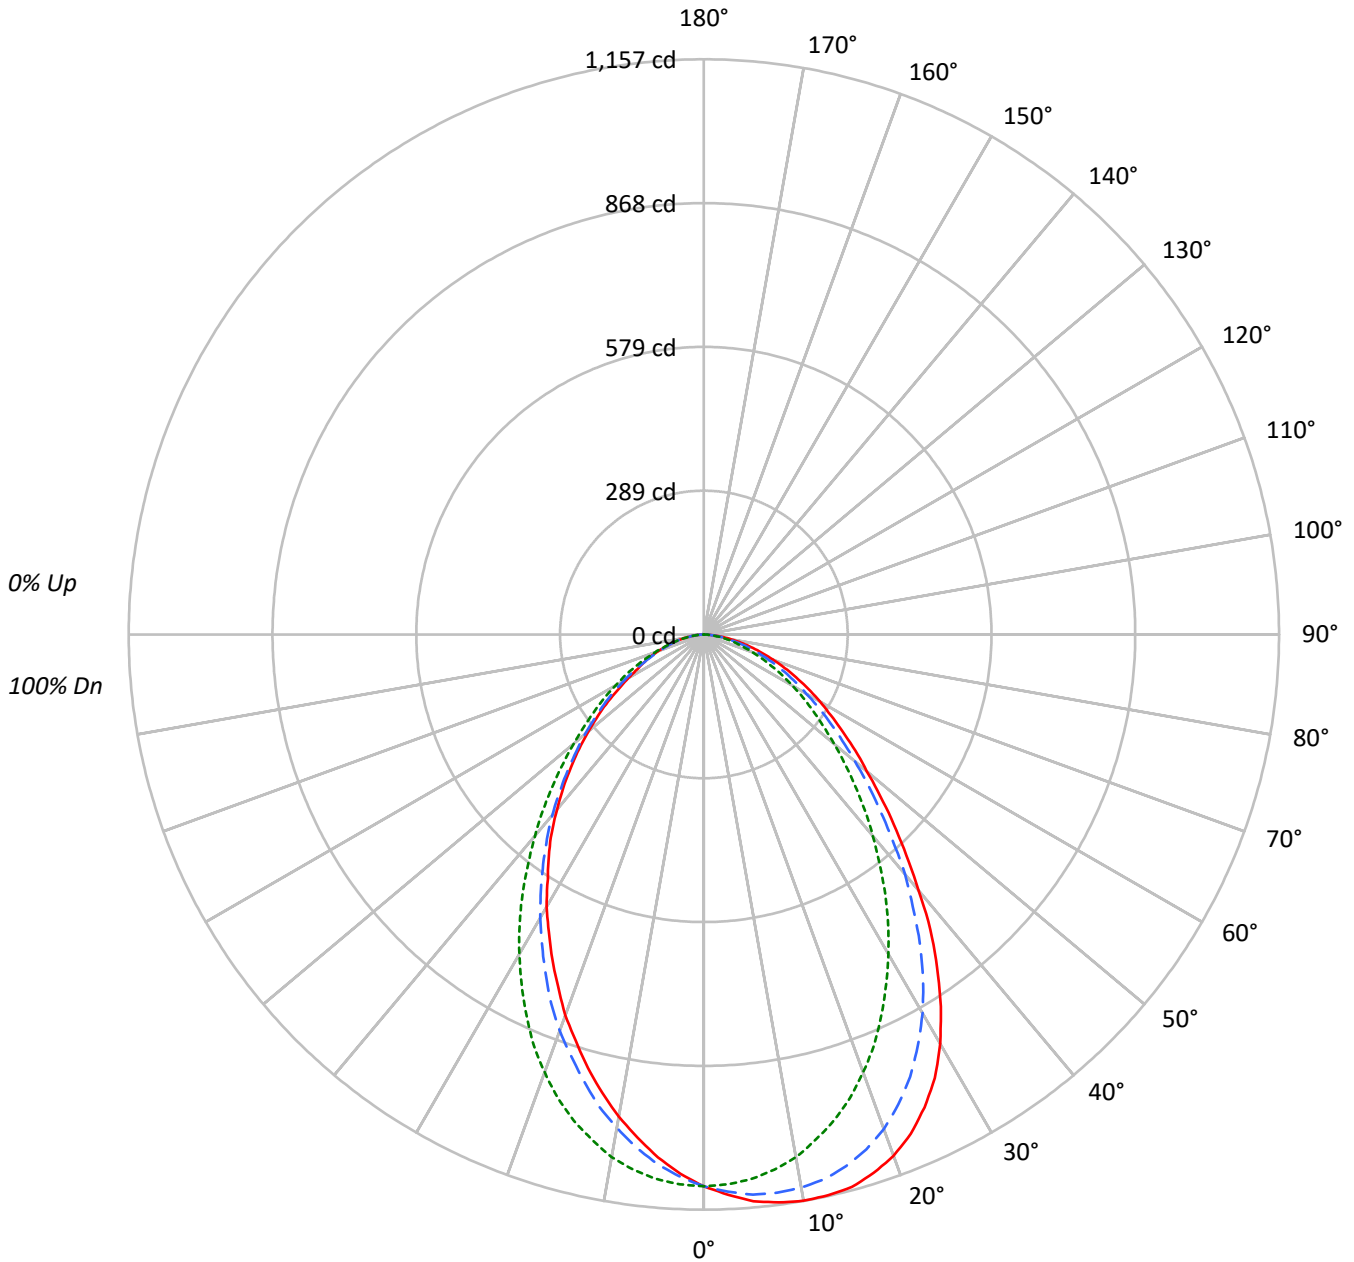

Cooper Lighting Solutions Photometric Lab
 1121 Highway 74 South
 Peachtree City, GA 30269



TEST NUMBER: P584012

CATALOG NUMBER: HCC8S20D010BZ-HM80520835-81WWW

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20					20					20					20					20					
RC	80					70					50					30					10					0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0					
RCR																										
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100								
1	110	106	103	99	108	104	101	98	100	97	95	96	94	92	93	91	89	87								
2	102	95	89	84	99	93	88	83	90	85	81	86	83	79	83	80	78	76								
3	94	85	78	72	92	83	77	71	81	75	70	78	73	69	75	71	68	66								
4	87	76	69	63	85	75	68	62	73	67	62	71	65	61	68	64	60	58								
5	81	69	61	55	79	68	61	55	66	60	54	64	59	54	63	57	53	51								
6	75	63	55	49	73	62	55	49	61	54	49	59	53	48	57	52	48	46								
7	70	58	50	44	69	57	50	44	56	49	44	54	48	44	53	48	43	41								
8	66	53	46	40	64	53	45	40	51	45	40	50	44	40	49	44	39	38								
9	62	49	42	37	60	49	42	37	48	41	36	47	41	36	46	40	36	34								
10	58	46	39	34	57	45	38	34	44	38	33	44	38	33	43	37	33	32								

AVERAGE LUMINANCE (cd/sqm):

	0°	90°	180°
0°	34228	34228	34228
5°	35430	34034	32681
10°	36219	33435	30842
15°	36735	32310	28802
20°	36622	30745	26738
25°	35715	28747	24545
30°	33837	26438	22525
35°	30785	23927	20467
40°	27039	21278	18489
45°	23575	18721	16484
50°	20523	16397	14521
55°	18300	14413	12634
60°	16627	12631	10774
65°	14943	10989	9777
70°	13308	9368	8827
75°	11664	7899	7530
80°	9891	6428	6695
85°	7430	4812	5307



TEST NUMBER: P584012

CATALOG NUMBER: HCC8S20D010BZ-HM80520835-81WWW

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	104.0	5.1
10°-20°	286.5	14.0
20°-30°	397.6	19.4
30°-40°	411.1	20.1
40°-50°	344.2	16.8
50°-60°	249.9	12.2
60°-70°	157.7	7.7
70°-80°	78.1	3.8
80°-90°	19.4	0.9
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	788.1	38.5
0°-40°	1199.2	58.5
0°-60°	1793.3	87.5
0°-90°	2048.6	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	2048.6	100.0

CANDELA DISTRIBUTION:

	0°	45°	90°	135°	180°	Flux
0°	1110	1110	1110	1110	1110	
5°	1145	1131	1100	1069	1056	109
15°	1151	1107	1012	931	902	324
25°	1050	982	845	753	721	481
35°	818	758	636	563	544	509
45°	541	502	429	387	378	418
55°	340	310	268	246	235	307
65°	205	179	151	132	134	204
75°	98	81	66	63	63	105
85°	21	16	14	15	15	26
90°	0	0	0	0	0	

Cooper Lighting Solutions Photometric Lab
 1121 Highway 74 South
 Peachtree City, GA 30269



TEST NUMBER: P584012

CATALOG NUMBER: HCC8S20D010BZ-HM80520835-81WWW

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	22.5°	25°	30°	35°	40°	45°
0°	1110.0	1110.0	1110.0	1110.0	1110.0	1110.0	1110.0	1110.0	1110.0	1110.0	1110.0
2.5°	1128.1	1128.1	1129.6	1128.1	1128.1	1128.1	1126.6	1126.6	1125.0	1125.0	1122.1
5°	1144.6	1141.7	1144.6	1141.7	1141.7	1141.7	1140.2	1137.1	1135.7	1132.6	1131.1
7.5°	1152.2	1150.7	1150.7	1149.1	1149.1	1147.7	1146.2	1144.6	1138.6	1137.1	1132.6
10°	1156.7	1155.2	1155.2	1153.6	1150.7	1150.7	1147.7	1146.2	1138.6	1135.7	1129.6
12.5°	1155.2	1155.2	1155.2	1153.6	1149.1	1147.7	1144.6	1140.2	1134.1	1128.1	1122.1
15°	1150.7	1150.7	1147.7	1146.2	1141.7	1138.6	1137.1	1129.6	1123.6	1116.0	1106.9
17.5°	1135.7	1135.7	1134.1	1131.1	1126.6	1123.6	1120.5	1113.0	1106.9	1095.0	1085.9
20°	1116.0	1114.5	1113.0	1108.5	1104.0	1102.5	1098.0	1087.4	1079.9	1070.9	1058.8
22.5°	1087.4	1085.9	1084.4	1081.4	1073.8	1070.9	1067.8	1060.3	1046.8	1037.7	1022.7
25°	1049.7	1049.7	1046.8	1042.3	1034.7	1031.6	1027.2	1019.6	1007.5	994.1	982.0
27.5°	1006.1	1004.6	1000.1	997.0	991.0	986.5	978.9	969.9	957.9	947.4	932.2
30°	950.3	950.3	947.4	942.9	935.3	932.2	926.2	915.7	903.6	890.2	879.5
32.5°	887.1	887.1	882.6	879.5	875.0	867.5	866.1	854.0	843.5	832.8	820.8
35°	817.8	819.4	816.3	810.3	802.8	802.8	799.7	789.2	777.2	766.6	757.5
37.5°	748.6	744.1	742.5	739.5	735.0	728.9	726.0	721.4	710.9	703.4	689.8
40°	671.7	673.3	670.2	667.2	665.7	661.2	659.7	652.1	644.7	635.6	629.5
42.5°	602.5	602.5	602.5	599.4	596.4	591.9	590.4	585.9	576.8	570.8	561.8
45°	540.6	536.2	536.2	534.6	533.2	530.1	525.6	522.7	516.7	512.0	501.5
47.5°	480.5	481.9	480.5	478.9	474.5	472.9	471.4	465.4	459.3	454.8	447.3
50°	427.8	430.7	427.8	427.8	424.7	423.3	420.2	415.7	411.2	403.7	396.1
52.5°	384.0	384.0	382.6	381.1	376.6	373.5	372.0	370.6	363.0	357.0	350.9
55°	340.4	341.8	341.8	337.3	335.8	332.9	331.3	326.8	323.9	314.8	310.3
57.5°	302.7	301.2	302.7	299.8	296.7	293.7	292.2	289.1	284.6	278.6	272.6
60°	269.6	266.5	266.5	265.1	262.0	260.5	257.6	253.1	248.5	242.4	237.9
62.5°	236.5	235.0	233.4	231.9	229.0	227.4	225.9	221.4	216.9	212.4	207.8
65°	204.8	204.8	203.3	200.3	198.8	197.3	195.7	192.8	186.8	183.8	179.2
67.5°	176.2	174.7	174.7	171.7	168.7	167.1	167.1	164.2	159.7	155.1	152.1
70°	147.6	149.1	147.6	146.1	143.1	143.1	140.1	138.5	132.5	131.1	126.5
72.5°	122.0	122.0	120.4	120.4	117.5	116.0	116.0	113.0	109.9	107.0	103.9
75°	97.9	97.9	97.9	96.3	94.9	91.8	91.8	90.4	87.3	84.4	81.3
77.5°	76.8	75.3	75.3	73.8	72.3	70.8	70.8	69.3	66.3	64.8	61.7
80°	55.7	54.3	54.3	54.3	51.2	52.7	51.2	49.6	48.2	46.7	45.2
82.5°	36.2	37.7	37.7	36.2	34.6	34.6	34.6	33.1	33.1	31.7	30.1
85°	21.0	21.0	21.0	21.0	19.6	19.6	19.6	18.1	18.1	18.1	16.5
87.5°	9.0	9.0	9.0	9.0	9.0	9.0	7.6	7.6	7.6	7.6	7.6
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Cooper Lighting Solutions Photometric Lab
 1121 Highway 74 South
 Peachtree City, GA 30269



TEST NUMBER: P584012

CATALOG NUMBER: HCC8S20D010BZ-HM80520835-81WWW

CANDELA DISTRIBUTION (continued):

	50°	55°	60°	65°	67.5°	70°	75°	80°	85°	90°	95°
0°	1110.0	1110.0	1110.0	1110.0	1110.0	1110.0	1110.0	1110.0	1110.0	1110.0	1110.0
2.5°	1122.1	1119.0	1117.6	1116.0	1116.0	1114.5	1113.0	1110.0	1110.0	1106.9	1105.5
5°	1128.1	1123.6	1120.5	1117.6	1116.0	1113.0	1110.0	1105.5	1104.0	1099.5	1095.0
7.5°	1129.6	1122.1	1119.0	1113.0	1110.0	1106.9	1100.9	1096.4	1090.4	1085.9	1079.9
10°	1123.6	1117.6	1110.0	1102.5	1100.9	1096.4	1087.4	1081.4	1073.8	1067.8	1058.8
12.5°	1114.5	1105.5	1098.0	1089.0	1084.4	1079.9	1070.9	1061.8	1051.3	1040.8	1031.6
15°	1099.5	1089.0	1078.3	1067.8	1061.8	1057.3	1046.8	1036.3	1025.6	1012.1	1003.0
17.5°	1076.9	1064.9	1054.2	1040.8	1034.7	1030.2	1016.6	1004.6	991.0	977.5	968.4
20°	1048.3	1033.2	1021.1	1006.1	1001.6	994.1	980.5	966.9	951.9	936.9	926.2
22.5°	1010.6	995.6	982.0	966.9	959.4	951.9	938.3	921.7	906.7	894.7	884.1
25°	966.9	953.4	936.9	923.3	914.2	905.2	890.2	876.6	863.0	844.9	834.4
27.5°	918.8	902.2	890.2	872.1	863.0	857.0	840.4	822.3	810.3	793.7	781.7
30°	864.5	849.5	835.9	817.8	808.8	802.8	787.7	771.1	759.1	742.5	730.5
32.5°	807.3	790.8	774.1	762.2	751.5	745.5	728.9	718.4	703.4	689.8	676.2
35°	745.5	728.9	716.9	700.3	694.3	688.3	674.7	661.2	647.6	635.6	625.0
37.5°	679.3	667.2	653.6	641.6	637.1	631.1	614.5	602.5	591.9	579.9	570.8
40°	614.5	604.0	594.9	582.8	575.3	570.8	558.7	548.2	536.2	528.6	519.6
42.5°	555.8	543.7	534.6	525.6	518.1	513.6	503.1	495.5	486.5	478.9	468.4
45°	494.0	487.9	477.4	470.0	465.4	459.3	451.9	442.8	435.2	429.3	421.7
47.5°	439.8	433.8	426.2	417.2	414.2	409.7	402.1	396.1	390.1	384.0	376.6
50°	390.1	382.6	376.6	370.6	367.5	363.0	355.4	352.5	347.9	341.8	337.3
52.5°	344.9	338.9	332.9	325.3	323.9	320.8	316.3	310.3	305.8	302.7	299.8
55°	304.2	298.2	293.7	287.7	286.2	283.2	277.2	274.1	271.2	268.1	265.1
57.5°	268.1	262.0	256.0	253.1	250.0	247.0	245.5	241.0	237.9	236.5	233.4
60°	235.0	229.0	224.5	219.9	218.4	216.9	213.8	210.9	207.8	204.8	203.3
62.5°	203.3	197.3	194.3	191.2	188.3	188.3	185.2	182.3	179.2	177.8	174.7
65°	174.7	171.7	167.1	162.6	161.1	161.1	156.6	155.1	153.7	150.6	147.6
67.5°	147.6	144.6	140.1	138.5	137.1	135.6	134.0	131.1	128.0	126.5	123.5
70°	123.5	120.4	117.5	116.0	114.4	113.0	109.9	108.4	105.4	103.9	102.4
72.5°	99.4	97.9	94.9	93.4	91.8	90.4	88.9	87.3	84.4	82.9	81.3
75°	79.8	78.4	75.3	73.8	72.3	72.3	70.8	67.7	66.3	66.3	64.8
77.5°	60.3	58.7	57.2	55.7	54.3	54.3	52.7	51.2	49.6	49.6	48.2
80°	43.7	42.2	40.7	40.7	40.7	39.1	37.7	37.7	36.2	36.2	34.6
82.5°	28.6	28.6	27.1	27.1	27.1	25.6	25.6	24.1	24.1	24.1	24.1
85°	16.5	16.5	16.5	15.0	15.0	15.0	15.0	15.0	15.0	13.6	15.0
87.5°	7.6	7.6	7.6	7.6	7.6	7.6	7.6	7.6	6.0	6.0	6.0
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Cooper Lighting Solutions Photometric Lab
 1121 Highway 74 South
 Peachtree City, GA 30269



TEST NUMBER: P584012

CATALOG NUMBER: HCC8S20D010BZ-HM80520835-81WWW

CANDELA DISTRIBUTION (continued):

	100°	105°	110°	112.5°	115°	120°	125°	130°	135°	140°	145°
0°	1110.0	1110.0	1110.0	1110.0	1110.0	1110.0	1110.0	1110.0	1110.0	1110.0	1110.0
2.5°	1104.0	1102.5	1099.5	1099.5	1096.4	1096.4	1095.0	1093.5	1091.9	1090.4	1089.0
5°	1093.5	1087.4	1084.4	1082.9	1079.9	1078.3	1073.8	1070.9	1069.4	1066.3	1063.3
7.5°	1073.8	1067.8	1061.8	1060.3	1058.8	1052.8	1048.3	1043.7	1040.8	1037.7	1034.7
10°	1051.3	1045.2	1037.7	1034.7	1031.6	1024.2	1018.2	1013.6	1007.5	1001.6	1000.1
12.5°	1024.2	1015.1	1006.1	1003.0	998.6	991.0	985.0	977.5	972.9	965.5	963.9
15°	992.5	982.0	974.4	966.9	963.9	956.4	945.8	939.8	930.8	927.8	920.2
17.5°	954.9	944.3	933.8	930.8	926.2	915.7	905.2	897.6	888.6	884.1	879.5
20°	915.7	902.2	891.6	888.6	882.6	873.5	863.0	855.5	848.0	838.9	834.4
22.5°	870.5	855.5	846.4	838.9	837.4	826.8	814.8	808.8	802.8	795.2	789.2
25°	820.8	807.3	796.8	790.8	787.7	778.7	769.6	762.2	753.1	748.6	741.0
27.5°	769.6	760.6	747.0	741.0	736.5	728.9	718.4	713.9	704.8	698.8	694.3
30°	720.0	706.4	698.8	691.4	686.7	679.3	670.2	665.7	658.1	652.1	647.6
32.5°	665.7	656.7	646.1	643.1	637.1	629.5	623.5	616.1	610.0	604.0	602.5
35°	616.1	604.0	593.4	590.4	585.9	578.4	575.3	570.8	563.3	561.8	555.8
37.5°	561.8	555.8	543.7	539.2	537.7	531.7	525.6	522.7	518.1	513.6	512.0
40°	510.6	503.1	497.0	492.5	489.5	485.0	478.9	477.4	474.5	468.4	466.9
42.5°	462.4	454.8	448.8	447.3	442.8	438.3	435.2	430.7	429.3	427.8	424.7
45°	415.7	411.2	405.2	403.7	402.1	396.1	393.1	390.1	387.1	385.6	382.6
47.5°	373.5	369.0	364.5	363.0	359.9	358.5	353.9	352.5	347.9	346.4	344.9
50°	332.9	329.9	326.8	325.3	322.3	320.8	317.8	314.8	311.8	310.3	308.7
52.5°	296.7	293.7	290.7	289.1	287.7	284.6	281.7	278.6	277.2	275.6	274.1
55°	262.0	259.1	257.6	256.0	254.5	253.1	248.5	247.0	245.5	244.0	241.0
57.5°	230.5	227.4	224.5	224.5	222.9	221.4	218.4	215.4	215.4	212.4	209.3
60°	201.8	198.8	195.7	194.3	192.8	189.8	188.3	186.8	185.2	183.8	180.7
62.5°	171.7	170.2	167.1	167.1	164.2	162.6	161.1	159.7	158.2	155.1	153.7
65°	146.1	144.6	141.6	140.1	140.1	138.5	135.6	134.0	132.5	132.5	131.1
67.5°	122.0	120.4	117.5	116.0	116.0	114.4	113.0	113.0	111.5	109.9	111.5
70°	100.9	97.9	97.9	96.3	96.3	94.9	93.4	93.4	93.4	94.9	94.9
72.5°	79.8	78.4	76.8	76.8	76.8	76.8	75.3	75.3	76.8	78.4	78.4
75°	63.2	61.7	61.7	61.7	60.3	60.3	61.7	61.7	63.2	63.2	63.2
77.5°	46.7	46.7	46.7	46.7	46.7	46.7	48.2	48.2	49.6	49.6	49.6
80°	34.6	34.6	34.6	34.6	34.6	36.2	36.2	36.2	36.2	36.2	37.7
82.5°	24.1	24.1	24.1	24.1	24.1	24.1	24.1	25.6	25.6	25.6	25.6
85°	13.6	15.0	15.0	15.0	15.0	15.0	15.0	15.0	15.0	15.0	15.0
87.5°	6.0	6.0	6.0	6.0	6.0	6.0	6.0	6.0	6.0	6.0	6.0
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Cooper Lighting Solutions Photometric Lab
 1121 Highway 74 South
 Peachtree City, GA 30269



TEST NUMBER: P584012

CATALOG NUMBER: HCC8S20D010BZ-HM80520835-81WWW

CANDELA DISTRIBUTION (continued):

	150°	155°	157.5°	160°	165°	170°	175°	180°
0°	1110.0	1110.0	1110.0	1110.0	1110.0	1110.0	1110.0	1110.0
2.5°	1087.4	1087.4	1087.4	1089.0	1085.9	1085.9	1085.9	1085.9
5°	1061.8	1060.3	1058.8	1060.3	1057.3	1057.3	1055.8	1055.8
7.5°	1030.2	1028.7	1027.2	1027.2	1024.2	1024.2	1022.7	1021.1
10°	995.6	992.5	994.1	991.0	989.6	988.0	986.5	985.0
12.5°	957.9	954.9	953.4	950.3	947.4	945.8	947.4	944.3
15°	917.2	912.7	911.2	908.2	905.2	903.6	903.6	902.2
17.5°	872.1	869.0	867.5	864.5	863.0	860.0	858.5	857.0
20°	829.9	822.3	823.9	820.8	819.4	813.3	813.3	814.8
22.5°	783.2	778.7	775.6	772.7	771.1	768.1	768.1	766.6
25°	736.5	732.0	730.5	727.4	726.0	722.9	721.4	721.4
27.5°	691.4	685.3	685.3	682.3	679.3	677.8	676.2	674.7
30°	643.1	638.6	637.1	637.1	635.6	635.6	631.1	632.6
32.5°	598.0	594.9	593.4	590.4	590.4	588.9	588.9	584.4
35°	552.7	548.2	549.7	546.7	545.3	543.7	545.3	543.7
37.5°	509.1	506.0	506.0	503.1	503.1	501.5	500.0	503.1
40°	465.4	463.9	462.4	460.9	462.4	460.9	457.9	459.3
42.5°	421.7	421.7	420.2	420.2	418.7	418.7	418.7	418.7
45°	382.6	381.1	381.1	379.5	379.5	379.5	379.5	378.0
47.5°	343.4	341.8	341.8	341.8	340.4	340.4	338.9	340.4
50°	305.8	305.8	304.2	304.2	305.8	304.2	302.7	302.7
52.5°	271.2	271.2	269.6	269.6	268.1	266.5	268.1	268.1
55°	239.5	237.9	236.5	236.5	235.0	233.4	233.4	235.0
57.5°	209.3	207.8	206.4	206.4	203.3	201.8	201.8	201.8
60°	180.7	177.8	177.8	176.2	176.2	174.7	174.7	174.7
62.5°	153.7	152.1	152.1	152.1	152.1	150.6	150.6	150.6
65°	131.1	131.1	131.1	132.5	132.5	134.0	134.0	134.0
67.5°	113.0	114.4	114.4	114.4	116.0	116.0	116.0	114.4
70°	96.3	96.3	96.3	97.9	97.9	97.9	97.9	97.9
72.5°	79.8	79.8	79.8	79.8	79.8	79.8	79.8	79.8
75°	63.2	64.8	64.8	64.8	63.2	64.8	64.8	63.2
77.5°	49.6	49.6	49.6	49.6	49.6	49.6	49.6	49.6
80°	37.7	37.7	37.7	37.7	37.7	37.7	37.7	37.7
82.5°	25.6	25.6	25.6	25.6	25.6	25.6	25.6	25.6
85°	15.0	15.0	15.0	15.0	15.0	15.0	15.0	15.0
87.5°	6.0	6.0	6.0	6.0	6.0	6.0	6.0	6.0
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Classified
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Classified
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Classified
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180° - - 45°-225° - - - - 90°-270°

Classified
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Classified
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Classified
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Classified
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Classified
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Classified
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)