

Classified  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269



Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: HALO COMMERCIAL

Report Number: P584039

Luminaire Tested: **HCC8S20D010MB-HM80520927-81RWWH**

Issue Date: 10/21/2021

**Test Information**

Test Method: LM-41-14  
Report Number: P584039  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2109-368-15)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 10/21/2021  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: HALO COMMERCIAL  
Catalog Number: HCC8S20D010MB-HM80520927-81RWWH  
Description: HALO COMMERCIAL 8" ROUND, NEW CONSTRUCTION FRAME, WITH 8" WALLWASH DISTRIBUTION, HAZE TRIM  
Light Source: (1) HIGH LUMEN LED 90CRI / 2700K CCT  
CYLINDER  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**


Lumens per Lamp: N/A  
Luminaire Lumens: 1635.9 lumens  
Efficiency: N/A  
Efficacy: 81.8 lumens/watt  
Spacing Criteria (0/90/45): 1.13 / 1.07 / 1.16  
Luminous Opening: Circular (Dia: 0.67' x H: 0')  
CIE Type: Direct

Input Watts (W): 20  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P584039  
CATALOG NUMBER: HCC8S20D010MB-HM80520927-81RWWH

### Luminous Intensity Polar Plot

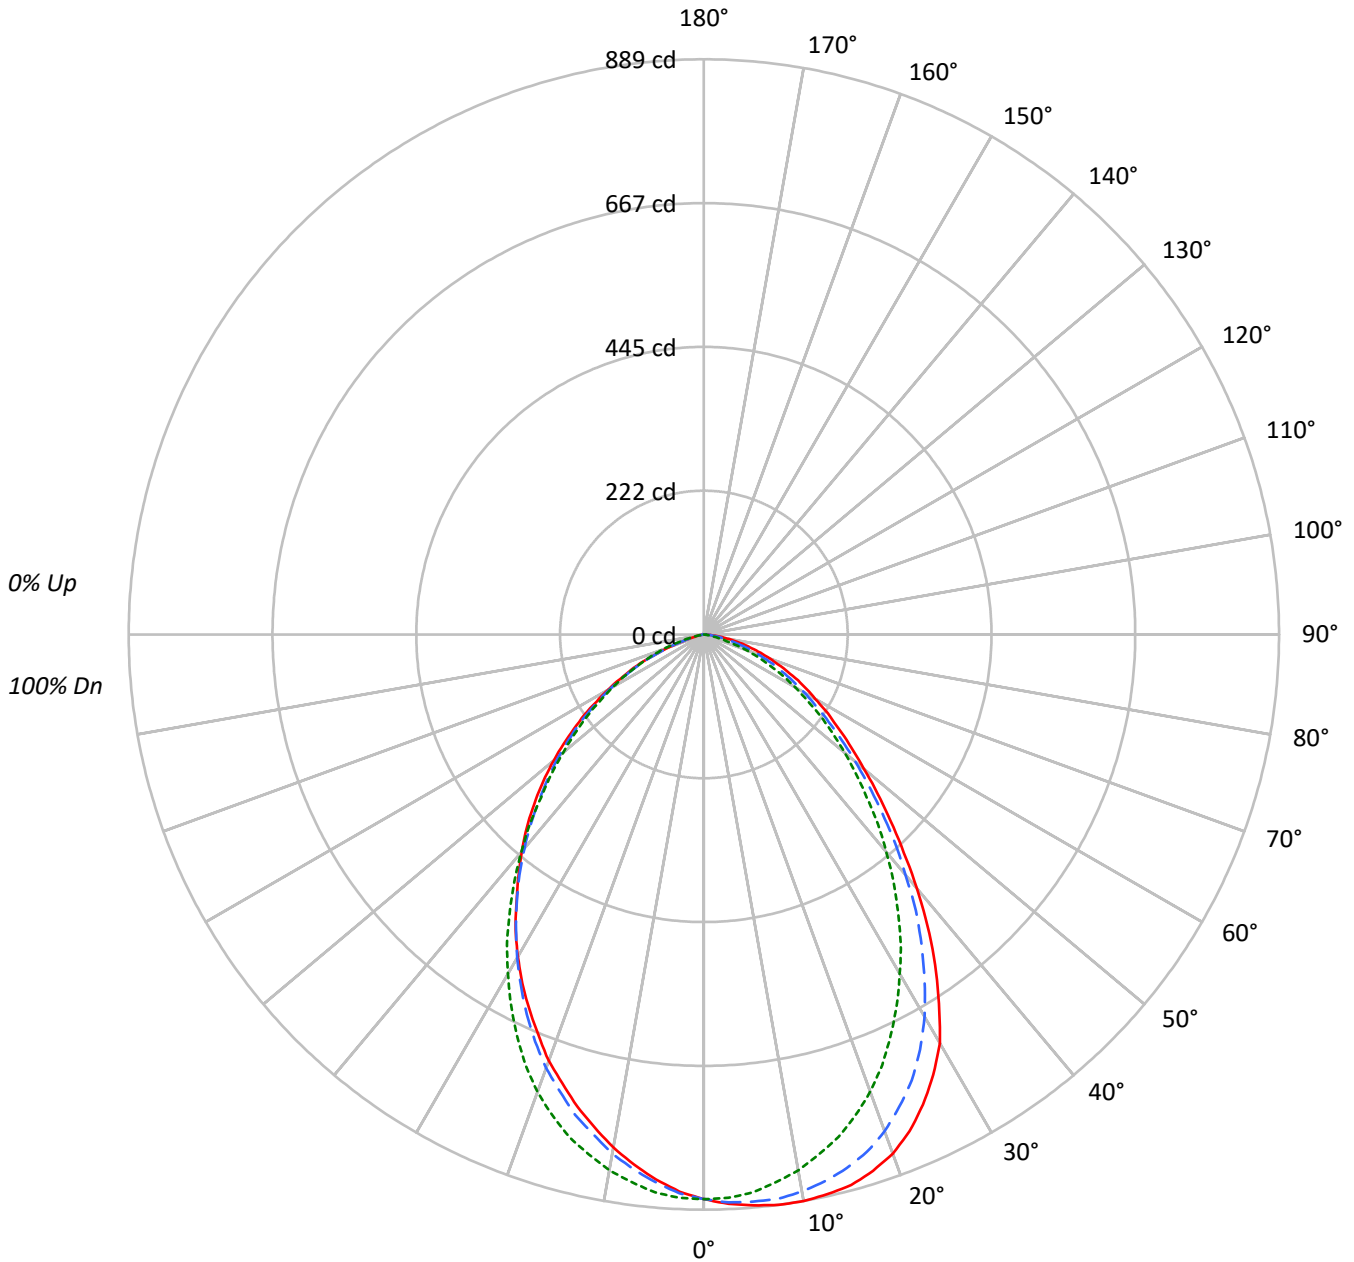

Cooper Lighting Solutions Photometric Lab  
 1121 Highway 74 South  
 Peachtree City, GA 30269



TEST NUMBER: P584039

CATALOG NUMBER: HCC8S20D010MB-HM80520927-81RWWH

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	100	100	100
1	111	107	104	100	108	105	102	99	101	98	96	97	95	93	93	92	90	88	88	88	88
2	103	96	90	85	100	94	89	84	90	86	82	87	84	80	84	81	79	77	77	77	77
3	95	86	79	73	92	84	78	73	81	76	71	79	74	70	76	72	69	67	67	67	67
4	88	77	70	64	86	76	69	63	74	67	63	71	66	62	69	65	61	59	59	59	59
5	81	70	62	56	79	69	62	56	67	60	55	65	59	55	63	58	54	52	52	52	52
6	76	64	56	50	74	63	55	50	61	54	49	60	54	49	58	53	49	47	47	47	47
7	71	58	51	45	69	58	50	45	56	49	45	55	49	44	54	48	44	42	42	42	42
8	66	54	46	41	65	53	46	41	52	45	40	51	45	40	50	44	40	38	38	38	38
9	62	50	42	37	61	49	42	37	48	41	37	47	41	37	46	41	36	35	35	35	35
10	58	46	39	34	57	46	39	34	45	38	34	44	38	34	43	38	34	32	32	32	32

**AVERAGE LUMINANCE (cd/sqm):**

	0°	90°	180°
0°	26911	26911	26911
5°	27416	26794	26172
10°	27843	26327	25212
15°	28122	25667	24119
20°	28018	24677	23010
25°	27274	23252	21724
30°	25975	21556	20463
35°	23460	19677	19010
40°	20610	17655	17611
45°	17788	15520	16192
50°	15486	13615	14521
55°	13731	11828	12650
60°	12254	9985	10503
65°	11040	8106	8282
70°	9800	6077	4905
75°	8447	3527	2109
80°	6499	1261	622
85°	4175	425	425



TEST NUMBER: P584039  
 CATALOG NUMBER: HCC8S20D010MB-HM80520927-81RWWH

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	81.9	5.0
10°-20°	228.0	13.9
20°-30°	322.5	19.7
30°-40°	339.9	20.8
40°-50°	288.8	17.7
50°-60°	208.0	12.7
60°-70°	120.0	7.3
70°-80°	41.0	2.5
80°-90°	5.6	0.3
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	632.5	38.7
0°-40°	972.4	59.4
0°-60°	1469.2	89.8
0°-90°	1635.9	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1635.9	100.0

**CANDELA DISTRIBUTION:**

	0°	45°	90°	135°	180°	Flux
0°	873	873	873	873	873	
5°	886	880	866	850	846	85
15°	881	854	804	768	756	248
25°	802	760	683	648	638	368
35°	623	586	523	504	505	388
45°	408	389	356	358	371	317
55°	255	235	220	228	235	230
65°	151	130	111	109	114	151
75°	71	53	30	19	18	75
85°	12	7	1	1	1	16
90°	0	0	0	0	0	



TEST NUMBER: P584039

CATALOG NUMBER: HCC8S20D010MB-HM80520927-81RWWH

**CANDELA DISTRIBUTION (FULL):**

	0°	5°	15°	25°	35°	45°	55°	65°	75°	85°	90°
0°	872.7	872.7	872.7	872.7	872.7	872.7	872.7	872.7	872.7	872.7	872.7
2.5°	880.9	882.1	880.9	880.9	879.8	878.6	877.4	876.2	873.9	871.5	871.5
5°	885.7	888.0	885.7	885.7	882.1	879.8	877.4	873.9	869.1	865.6	865.6
7.5°	889.2	889.2	889.2	885.7	883.3	879.8	873.9	867.9	862.0	856.1	853.8
10°	889.2	889.2	888.0	883.3	880.9	873.9	867.9	859.7	851.4	843.1	840.8
12.5°	885.7	886.9	884.5	879.8	873.9	865.6	857.3	846.7	837.2	827.6	822.9
15°	880.9	879.8	877.4	871.5	864.4	853.8	845.5	833.5	820.5	808.7	804.0
17.5°	869.1	869.1	865.6	859.7	850.2	838.4	825.3	812.3	798.1	785.1	779.2
20°	853.8	853.8	849.0	841.9	832.4	817.0	802.8	787.4	770.9	757.9	752.0
22.5°	831.2	832.4	826.5	818.2	807.5	789.8	775.6	756.7	740.2	724.8	720.1
25°	801.6	804.0	798.1	789.8	775.6	760.3	742.5	724.8	705.9	690.5	683.4
27.5°	767.4	768.5	762.6	754.4	740.2	723.6	705.9	687.0	669.2	652.7	645.6
30°	729.5	724.8	722.4	711.8	696.4	682.3	662.2	646.8	627.9	613.7	605.4
32.5°	676.3	678.7	671.6	663.3	651.5	635.0	618.4	600.7	583.0	572.3	566.4
35°	623.2	625.5	622.0	613.7	600.7	586.5	570.0	557.0	541.6	528.6	522.7
37.5°	567.6	567.6	565.2	560.5	551.0	538.0	521.5	508.5	495.4	484.7	481.2
40°	512.0	509.7	508.5	505.0	496.6	484.7	474.1	463.5	450.5	443.4	438.6
42.5°	457.6	457.6	455.2	451.6	443.4	437.5	426.8	415.0	405.5	398.5	398.5
45°	407.9	409.1	405.5	403.2	398.5	389.0	379.5	371.3	363.0	358.3	355.9
47.5°	364.2	364.2	360.6	358.3	353.5	345.3	337.0	329.9	324.0	320.4	319.3
50°	322.8	322.8	322.8	316.9	311.0	305.1	299.2	290.9	287.3	285.0	283.8
52.5°	287.3	286.2	286.2	281.4	275.5	268.4	262.5	255.4	251.9	249.5	250.7
55°	255.4	255.4	254.2	248.3	242.4	235.3	229.4	223.5	221.2	218.8	220.0
56°	242.4	242.4	241.2	236.5	229.4	223.5	216.4	210.5	207.0	208.2	208.2
57°	233.0	230.6	230.6	224.7	218.8	210.5	204.6	198.7	196.3	195.1	195.1
58°	221.2	220.0	218.8	212.9	207.0	199.9	194.0	188.1	184.5	184.5	183.3
59°	209.3	209.3	207.0	202.2	196.3	189.2	183.3	177.4	173.9	172.7	172.7
60°	198.7	199.9	196.3	191.6	186.9	178.6	171.5	166.7	163.1	161.9	161.9
61°	189.2	189.2	186.9	181.0	175.1	169.1	161.9	156.0	153.7	151.3	151.3
62°	181.0	178.6	177.4	171.5	165.5	158.4	152.5	146.6	143.0	140.7	141.8
63°	170.3	169.1	166.7	161.9	156.0	148.9	141.8	137.1	133.6	130.0	131.2
64°	161.9	160.8	157.2	152.5	146.6	139.5	132.4	127.7	125.3	121.7	120.6
65°	151.3	150.1	148.9	143.0	137.1	130.0	124.1	119.4	115.8	113.5	111.1
66°	141.8	143.0	140.7	135.9	128.8	122.9	114.7	109.9	107.6	104.0	101.7
67°	133.6	133.6	131.2	126.5	119.4	113.5	107.6	101.7	98.1	94.6	93.4
67.5°	128.8	128.8	126.5	120.6	115.8	108.7	102.8	98.1	93.4	91.0	88.6
68°	124.1	124.1	122.9	118.2	112.3	105.2	99.3	93.4	88.6	85.1	83.9
69°	115.8	117.0	114.7	109.9	104.0	96.9	91.0	86.3	81.6	78.0	75.6
70°	108.7	107.6	105.2	100.5	94.6	89.8	83.9	78.0	73.3	68.6	67.4
71°	99.3	99.3	96.9	93.4	87.5	81.6	75.6	70.9	66.2	60.3	59.1
72°	92.2	92.2	89.8	85.1	80.4	74.5	68.6	62.6	59.1	53.2	50.8
72.5°	87.5	88.6	86.3	81.6	76.8	69.7	65.0	60.3	54.4	49.6	47.3
73°	85.1	83.9	82.7	78.0	72.1	67.4	61.5	56.7	50.8	46.1	43.7



TEST NUMBER: P584039  
 CATALOG NUMBER: HCC8S20D010MB-HM80520927-81RWWH

**CANDELA DISTRIBUTION (continued):**

	0°	5°	15°	25°	35°	45°	55°	65°	75°	85°	90°
77.5°	53.2	53.2	52.0	47.3	42.6	37.8	33.1	28.4	23.6	18.9	16.5
80°	36.6	37.8	35.5	33.1	29.6	24.8	20.1	16.5	11.8	9.5	7.1
82.5°	23.6	23.6	22.5	20.1	17.7	14.2	11.8	8.3	5.9	4.7	3.5
85°	11.8	13.0	11.8	10.6	8.3	7.1	5.9	3.5	2.4	1.2	1.2
87.5°	4.7	4.7	4.7	3.5	3.5	2.4	1.2	1.2	1.2	0.0	0.0
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Cooper Lighting Solutions Photometric Lab  
 1121 Highway 74 South  
 Peachtree City, GA 30269



TEST NUMBER: P584039

CATALOG NUMBER: HCC8S20D010MB-HM80520927-81RWWH

**CANDELA DISTRIBUTION (continued):**

	95°	105°	115°	125°	135°	145°	155°	165°	175°	180°
0°	872.7	872.7	872.7	872.7	872.7	872.7	872.7	872.7	872.7	872.7
2.5°	869.1	869.1	866.8	865.6	864.4	863.2	862.0	860.9	860.9	862.0
5°	862.0	859.7	854.9	853.8	850.2	849.0	846.7	845.5	846.7	845.5
7.5°	851.4	846.7	840.8	838.4	833.5	831.2	827.6	827.6	825.3	826.5
10°	837.2	830.0	822.9	818.2	814.6	811.1	808.7	806.4	805.2	805.2
12.5°	819.4	811.1	804.0	796.9	791.0	788.6	783.9	783.9	781.5	780.4
15°	799.3	788.6	780.4	773.3	768.5	763.8	760.3	757.9	755.5	755.5
17.5°	773.3	763.8	755.5	747.3	740.2	736.6	733.1	729.5	729.5	727.2
20°	744.9	734.3	727.2	718.9	713.0	707.1	702.3	702.3	700.0	701.2
22.5°	713.0	700.0	692.9	687.0	681.1	676.3	671.6	671.6	670.4	669.2
25°	677.5	666.9	658.6	651.5	648.0	643.2	642.1	639.7	638.5	638.5
27.5°	639.7	631.4	620.8	617.2	612.5	610.1	610.1	609.0	606.6	607.8
30°	599.5	590.1	584.1	581.8	577.1	577.1	575.9	573.5	573.5	574.7
32.5°	560.5	551.0	546.3	545.1	540.4	540.4	539.2	540.4	540.4	541.6
35°	518.0	509.7	508.5	505.0	503.8	503.8	503.8	506.1	508.5	505.0
37.5°	477.6	471.7	468.2	467.0	468.2	468.2	469.4	472.9	471.7	470.6
40°	436.3	431.5	429.2	429.2	431.5	433.9	433.9	437.5	438.6	437.5
42.5°	394.9	391.4	391.4	392.5	394.9	396.1	399.6	403.2	404.4	405.5
45°	355.9	355.9	355.9	357.1	358.3	360.6	365.4	368.9	370.1	371.3
47.5°	318.1	316.9	320.4	321.6	325.2	326.4	329.9	334.6	335.8	337.0
50°	282.6	285.0	286.2	289.7	292.1	292.1	296.8	299.2	302.7	302.7
52.5°	249.5	253.1	254.2	257.8	259.0	260.2	262.5	266.1	268.4	268.4
55°	220.0	221.2	223.5	224.7	228.2	229.4	231.8	233.0	236.5	235.3
56°	207.0	209.3	210.5	212.9	215.2	216.4	218.8	220.0	222.3	223.5
57°	195.1	196.3	199.9	201.1	203.4	203.4	204.6	208.2	208.2	209.3
58°	183.3	185.7	186.9	188.1	190.4	191.6	194.0	195.1	196.3	195.1
59°	172.7	173.9	175.1	175.1	177.4	177.4	181.0	183.3	184.5	184.5
60°	161.9	161.9	163.1	164.3	166.7	168.0	168.0	170.3	170.3	170.3
61°	151.3	151.3	152.5	153.7	154.8	154.8	157.2	157.2	158.4	159.6
62°	141.8	140.7	140.7	141.8	141.8	144.2	145.4	146.6	147.8	146.6
63°	131.2	130.0	130.0	130.0	130.0	132.4	132.4	133.6	135.9	134.7
64°	119.4	119.4	119.4	119.4	120.6	120.6	122.9	124.1	125.3	126.5
65°	111.1	108.7	107.6	107.6	108.7	109.9	111.1	112.3	113.5	113.5
66°	101.7	99.3	98.1	98.1	98.1	98.1	100.5	100.5	102.8	102.8
67°	91.0	88.6	87.5	86.3	86.3	86.3	89.8	88.6	88.6	88.6
67.5°	87.5	83.9	82.7	81.6	80.4	82.7	81.6	82.7	82.7	81.6
68°	82.7	80.4	78.0	75.6	75.6	75.6	76.8	78.0	76.8	75.6
69°	73.3	72.1	68.6	66.2	65.0	66.2	65.0	66.2	65.0	66.2
70°	65.0	61.5	57.9	56.7	55.6	55.6	55.6	54.4	55.6	54.4
71°	56.7	53.2	49.6	47.3	46.1	46.1	44.9	46.1	44.9	46.1
72°	48.5	44.9	40.2	37.8	37.8	37.8	37.8	36.6	37.8	36.6
72.5°	44.9	40.2	36.6	34.3	33.1	33.1	33.1	33.1	31.9	33.1
73°	41.4	36.6	31.9	30.7	30.7	30.7	29.6	28.4	29.6	29.6





TEST NUMBER: P584039  
CATALOG NUMBER: HCC8S20D010MB-HM80520927-81RWWH

**CANDELA DISTRIBUTION (continued):**

	95°	105°	115°	125°	135°	145°	155°	165°	175°	180°
77.5°	14.2	10.6	9.5	9.5	9.5	9.5	9.5	9.5	8.3	8.3
80°	5.9	4.7	3.5	3.5	3.5	3.5	3.5	3.5	3.5	3.5
82.5°	2.4	2.4	2.4	2.4	2.4	2.4	2.4	2.4	2.4	2.4
85°	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.2
87.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Classified  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Classified  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Classified  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°    - - 45°-225°    - - - - 90°-270°

Classified  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Classified  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Classified  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



74°	76.8	76.8	74.5	70.9	65.0	59.1	54.4	49.6	43.7	37.8	35.5
75°	70.9	69.7	67.4	63.8	59.1	53.2	48.5	42.6	37.8	31.9	29.6

Classified  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report





Classified

Scaled Data Report

Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269



74°	34.3	28.4	26.0	23.6	23.6	23.6	22.5	22.5	22.5	23.6
75°	27.2	22.5	20.1	17.7	18.9	17.7	18.9	17.7	17.7	17.7

Classified  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)