

Classified  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269



Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: HALO COMMERCIAL

Report Number: P584114

Luminaire Tested: **HCC8W25D010BZ-HM82555827-81WWW**

Issue Date: 10/21/2021

**Test Information**

Test Method: LM-41-14  
Report Number: P584114  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2109-368-16)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 10/21/2021  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: HALO COMMERCIAL  
Catalog Number: HCC8W25D010BZ-HM82555827-81WWW  
Description: HALO COMMERCIAL 8" ROUND, NEW CONSTRUCTION FRAME, WITH 8" WALLWASH DISTRIBUTION, WHITE TRIM  
Light Source: (1) HIGH LUMEN LED 80CRI / 2700K CCT  
CYLINDER  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**


Lumens per Lamp: N/A  
Luminaire Lumens: 2245.7 lumens  
Efficiency: N/A  
Efficacy: 83.8 lumens/watt  
Spacing Criteria (0/90/45): 1.09 / 1.04 / 1.13  
Luminous Opening: Circular (Dia: 0.67' x H: 0')  
CIE Type: Direct

Input Watts (W): 26.8  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P584114  
CATALOG NUMBER: HCC8W25D010BZ-HM82555827-81WWW

### Luminous Intensity Polar Plot

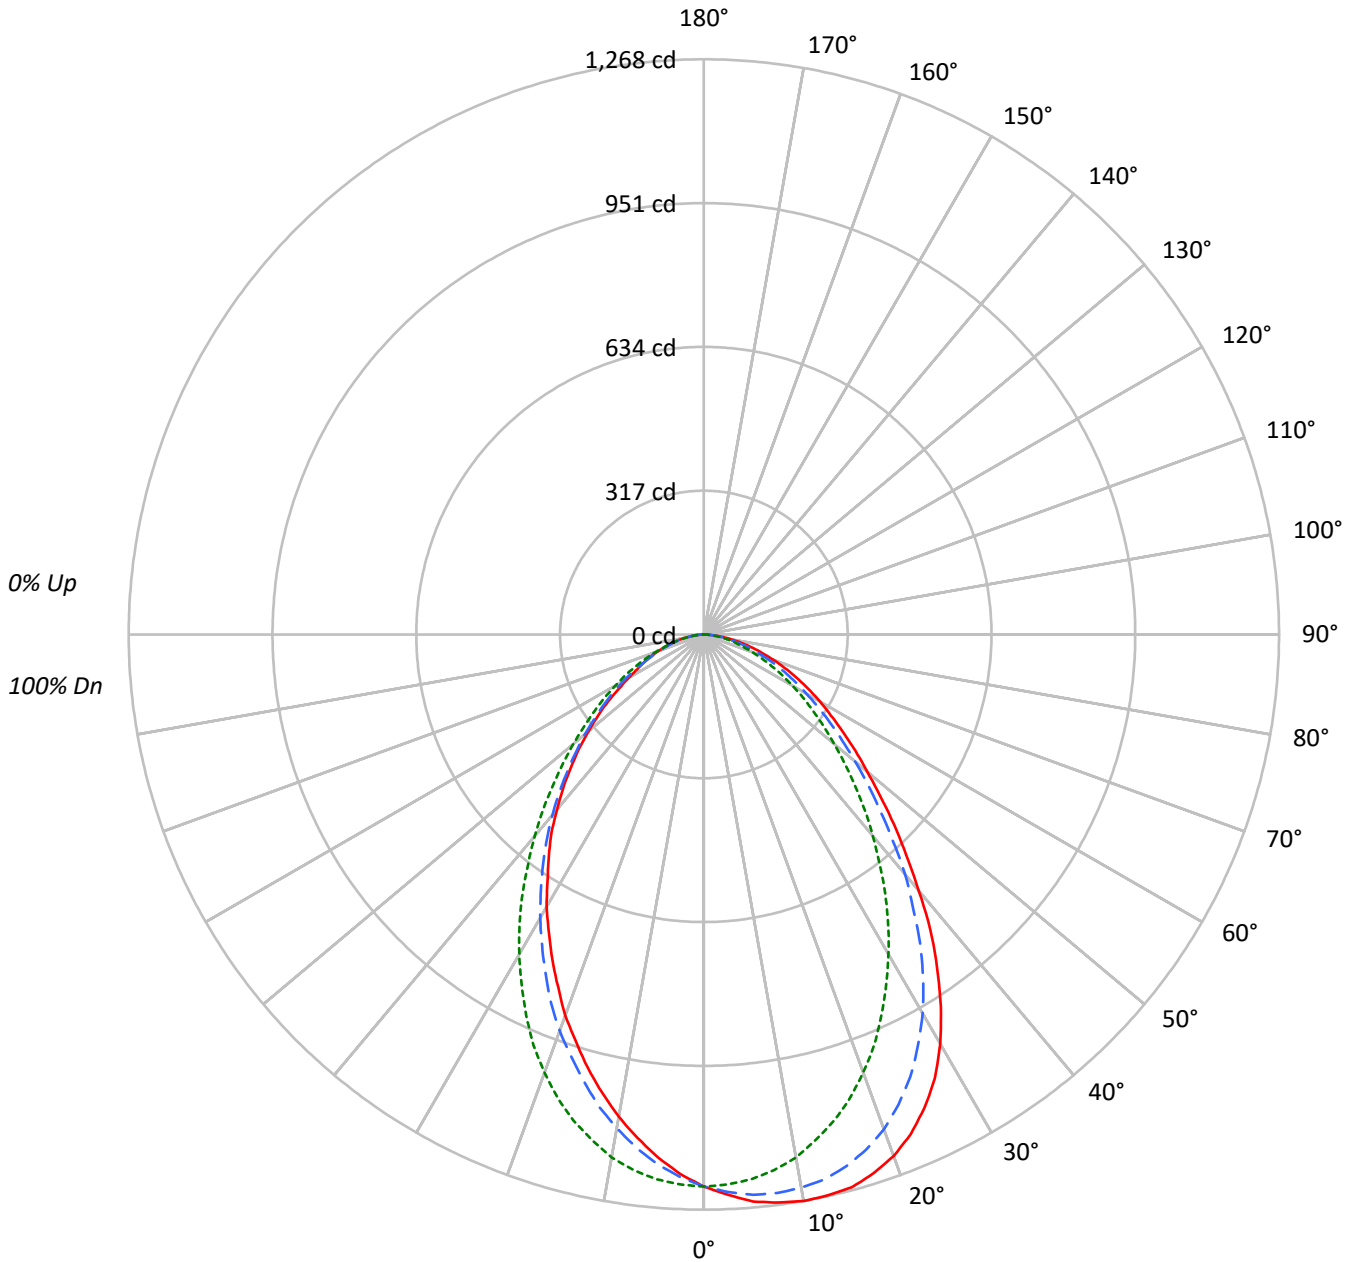



TEST NUMBER: P584114

CATALOG NUMBER: HCC8W25D010BZ-HM82555827-81WWW

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20					20					20					20					20					
RC	80					70					50					30					10					0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0					
RCR																										
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100								
1	110	106	103	99	108	104	101	98	100	97	95	96	94	92	93	91	89	87								
2	102	95	89	84	99	93	88	83	90	85	81	86	83	79	83	80	78	76								
3	94	85	78	72	92	83	77	71	81	75	70	78	73	69	75	71	68	66								
4	87	76	69	63	85	75	68	62	73	67	62	71	65	61	68	64	60	58								
5	81	69	61	55	79	68	61	55	66	60	54	64	59	54	63	57	53	51								
6	75	63	55	49	73	62	55	49	61	54	49	59	53	48	57	52	48	46								
7	70	58	50	44	69	57	50	44	56	49	44	54	48	44	53	48	43	41								
8	66	53	46	40	64	53	45	40	51	45	40	50	44	40	49	44	39	38								
9	62	49	42	37	60	49	42	37	48	41	36	47	41	36	46	40	36	34								
10	58	46	39	34	57	45	38	34	44	38	33	44	38	33	43	37	33	32								

**AVERAGE LUMINANCE (cd/sqm):**

	0°	90°	180°
0°	37525	37525	37525
5°	38841	37312	35826
10°	39707	36654	33811
15°	40269	35423	31573
20°	40146	33701	29311
25°	39155	31517	26906
30°	37099	28980	24693
35°	33752	26230	22440
40°	29643	23327	20268
45°	25851	20522	18072
50°	22494	17980	15922
55°	20058	15800	13844
60°	18224	13852	11810
65°	16388	12047	10719
70°	14588	10278	9674
75°	12784	8662	8257
80°	10850	7032	7334
85°	8173	5272	5838



TEST NUMBER: P584114  
 CATALOG NUMBER: HCC8W25D010BZ-HM82555827-81WWW

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	114.0	5.1
10°-20°	314.0	14.0
20°-30°	435.9	19.4
30°-40°	450.7	20.1
40°-50°	377.4	16.8
50°-60°	274.0	12.2
60°-70°	172.9	7.7
70°-80°	85.6	3.8
80°-90°	21.3	0.9
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	863.9	38.5
0°-40°	1314.6	58.5
0°-60°	1966.0	87.5
0°-90°	2245.7	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	2245.7	100.0

**CANDELA DISTRIBUTION:**

	0°	45°	90°	135°	180°	Flux
0°	1217	1217	1217	1217	1217	
5°	1255	1240	1205	1172	1157	120
15°	1261	1214	1110	1020	989	355
25°	1151	1076	926	826	791	527
35°	897	830	697	618	596	558
45°	593	550	471	424	414	458
55°	373	340	294	269	258	337
65°	225	196	165	145	147	224
75°	107	89	73	69	69	115
85°	23	18	15	16	16	28
90°	0	0	0	0	0	



TEST NUMBER: P584114

CATALOG NUMBER: HCC8W25D010BZ-HM82555827-81WWW

**CANDELA DISTRIBUTION (FULL):**

	0°	5°	10°	15°	20°	22.5°	25°	30°	35°	40°	45°
0°	1216.9	1216.9	1216.9	1216.9	1216.9	1216.9	1216.9	1216.9	1216.9	1216.9	1216.9
2.5°	1236.7	1236.7	1238.3	1236.7	1236.7	1236.7	1235.0	1235.0	1233.4	1233.4	1230.1
5°	1254.8	1251.6	1254.8	1251.6	1251.6	1251.6	1249.9	1246.6	1244.9	1241.6	1240.0
7.5°	1263.1	1261.4	1261.4	1259.8	1259.8	1258.1	1256.5	1254.8	1248.3	1246.6	1241.6
10°	1268.1	1266.3	1266.3	1264.7	1261.4	1261.4	1258.1	1256.5	1248.3	1244.9	1238.3
12.5°	1266.3	1266.3	1266.3	1264.7	1259.8	1258.1	1254.8	1249.9	1243.2	1236.7	1230.1
15°	1261.4	1261.4	1258.1	1256.5	1251.6	1248.3	1246.6	1238.3	1231.7	1223.4	1213.6
17.5°	1244.9	1244.9	1243.2	1240.0	1235.0	1231.7	1228.5	1220.1	1213.6	1200.3	1190.5
20°	1223.4	1221.8	1220.1	1215.2	1210.3	1208.6	1203.6	1192.1	1183.8	1173.9	1160.7
22.5°	1192.1	1190.5	1188.8	1185.5	1177.2	1173.9	1170.6	1162.3	1147.5	1137.6	1121.1
25°	1150.8	1150.8	1147.5	1142.5	1134.3	1131.0	1126.1	1117.8	1104.6	1089.7	1076.5
27.5°	1103.0	1101.2	1096.3	1093.0	1086.4	1081.4	1073.2	1063.3	1050.1	1038.5	1022.1
30°	1041.9	1041.9	1038.5	1033.6	1025.4	1022.1	1015.4	1003.9	990.7	975.8	964.3
32.5°	972.5	972.5	967.5	964.3	959.3	951.0	949.4	936.1	924.6	913.0	899.9
35°	896.6	898.2	894.9	888.3	880.1	880.1	876.8	865.2	851.9	840.4	830.5
37.5°	820.6	815.7	813.9	810.7	805.7	799.2	795.9	790.8	779.3	771.0	756.2
40°	736.4	738.1	734.8	731.5	729.7	724.8	723.2	715.0	706.6	696.8	690.2
42.5°	660.4	660.4	660.4	657.1	653.9	648.8	647.2	642.3	632.4	625.7	615.9
45°	592.8	587.8	587.8	586.1	584.5	581.2	576.2	573.0	566.4	561.3	549.8
47.5°	526.7	528.4	526.7	525.0	520.1	518.4	516.8	510.2	503.5	498.6	490.4
50°	468.9	472.2	468.9	468.9	465.6	464.0	460.6	455.7	450.8	442.4	434.2
52.5°	421.0	421.0	419.3	417.7	412.8	409.5	407.8	406.2	397.9	391.3	384.7
55°	373.1	374.8	374.8	369.9	368.2	364.9	363.3	358.2	355.0	345.1	340.2
57.5°	331.9	330.2	331.9	328.6	325.3	322.0	320.4	317.0	312.0	305.5	298.9
60°	295.5	292.2	292.2	290.6	287.3	285.7	282.4	277.3	272.4	265.8	260.9
62.5°	259.3	257.5	255.9	254.2	250.9	249.3	247.7	242.7	237.8	232.8	227.8
65°	224.6	224.6	222.9	219.6	218.0	216.2	214.6	211.3	204.7	201.5	196.5
67.5°	193.1	191.5	191.5	188.2	184.9	183.3	183.3	180.0	175.1	170.0	166.8
70°	161.8	163.5	161.8	160.2	156.9	156.9	153.5	151.9	145.3	143.6	138.7
72.5°	133.8	133.8	132.0	132.0	128.8	127.1	127.1	123.8	120.5	117.3	114.0
75°	107.3	107.3	107.3	105.7	104.0	100.7	100.7	99.1	95.8	92.4	89.1
77.5°	84.2	82.6	82.6	80.9	79.3	77.6	77.6	76.0	72.7	71.0	67.7
80°	61.1	59.5	59.5	59.5	56.2	57.8	56.2	54.5	52.9	51.1	49.5
82.5°	39.6	41.3	41.3	39.6	38.0	38.0	38.0	36.3	36.3	34.7	33.1
85°	23.1	23.1	23.1	23.1	21.5	21.5	21.5	19.8	19.8	19.8	18.2
87.5°	10.0	10.0	10.0	10.0	10.0	10.0	8.2	8.2	8.2	8.2	8.2
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Cooper Lighting Solutions Photometric Lab  
 1121 Highway 74 South  
 Peachtree City, GA 30269



TEST NUMBER: P584114

CATALOG NUMBER: HCC8W25D010BZ-HM82555827-81WWW

**CANDELA DISTRIBUTION (continued):**

	50°	55°	60°	65°	67.5°	70°	75°	80°	85°	90°	95°
0°	1216.9	1216.9	1216.9	1216.9	1216.9	1216.9	1216.9	1216.9	1216.9	1216.9	1216.9
2.5°	1230.1	1226.8	1225.2	1223.4	1223.4	1221.8	1220.1	1216.9	1216.9	1213.6	1211.9
5°	1236.7	1231.7	1228.5	1225.2	1223.4	1220.1	1216.9	1211.9	1210.3	1205.4	1200.3
7.5°	1238.3	1230.1	1226.8	1220.1	1216.9	1213.6	1207.0	1202.0	1195.4	1190.5	1183.8
10°	1231.7	1225.2	1216.9	1208.6	1207.0	1202.0	1192.1	1185.5	1177.2	1170.6	1160.7
12.5°	1221.8	1211.9	1203.6	1193.8	1188.8	1183.8	1173.9	1164.1	1152.5	1140.9	1131.0
15°	1205.4	1193.8	1182.1	1170.6	1164.1	1159.0	1147.5	1135.9	1124.4	1109.6	1099.6
17.5°	1180.5	1167.4	1155.8	1140.9	1134.3	1129.4	1114.5	1101.2	1086.4	1071.6	1061.7
20°	1149.2	1132.7	1119.4	1103.0	1098.0	1089.7	1074.8	1060.0	1043.5	1027.0	1015.4
22.5°	1107.9	1091.4	1076.5	1060.0	1051.7	1043.5	1028.6	1010.5	993.9	980.8	969.2
25°	1060.0	1045.2	1027.0	1012.1	1002.3	992.3	975.8	961.0	946.1	926.3	914.7
27.5°	1007.2	989.0	975.8	955.9	946.1	939.5	921.3	901.5	888.3	870.1	857.0
30°	947.7	931.2	916.3	896.6	886.6	880.1	863.5	845.4	832.1	813.9	800.8
32.5°	885.0	866.8	848.6	835.5	823.9	817.3	799.2	787.6	771.0	756.2	741.3
35°	817.3	799.2	785.9	767.7	761.2	754.6	739.7	724.8	709.9	696.8	685.2
37.5°	744.6	731.5	716.6	703.4	698.4	691.9	673.7	660.4	648.8	635.7	625.7
40°	673.7	662.1	652.2	639.0	630.8	625.7	612.6	601.0	587.8	579.5	569.7
42.5°	609.3	596.1	586.1	576.2	568.0	563.0	551.5	543.2	533.3	525.0	513.5
45°	541.5	535.0	523.4	515.1	510.2	503.5	495.3	485.5	477.2	470.6	462.3
47.5°	482.1	475.5	467.3	457.3	454.0	449.1	440.8	434.2	427.7	421.0	412.8
50°	427.7	419.3	412.8	406.2	402.9	397.9	389.7	386.4	381.5	374.8	369.9
52.5°	378.1	371.5	364.9	356.6	355.0	351.7	346.7	340.2	335.1	331.9	328.6
55°	333.5	326.9	322.0	315.3	313.7	310.4	303.8	300.5	297.2	293.9	290.6
57.5°	293.9	287.3	280.7	277.3	274.1	270.8	269.1	264.2	260.9	259.3	255.9
60°	257.5	250.9	246.0	241.1	239.4	237.8	234.4	231.1	227.8	224.6	222.9
62.5°	222.9	216.2	213.0	209.7	206.4	206.4	203.1	199.8	196.5	194.8	191.5
65°	191.5	188.2	183.3	178.4	176.7	176.7	171.7	170.0	168.4	165.1	161.8
67.5°	161.8	158.5	153.5	151.9	150.2	148.6	146.9	143.6	140.4	138.7	135.4
70°	135.4	132.0	128.8	127.1	125.5	123.8	120.5	118.9	115.6	114.0	112.2
72.5°	108.9	107.3	104.0	102.4	100.7	99.1	97.4	95.8	92.4	90.8	89.1
75°	87.5	85.8	82.6	80.9	79.3	79.3	77.6	74.3	72.7	72.7	71.0
77.5°	66.0	64.4	62.7	61.1	59.5	59.5	57.8	56.2	54.5	54.5	52.9
80°	47.8	46.2	44.6	44.6	44.6	42.9	41.3	41.3	39.6	39.6	38.0
82.5°	31.4	31.4	29.7	29.7	29.7	28.0	28.0	26.4	26.4	26.4	26.4
85°	18.2	18.2	18.2	16.5	16.5	16.5	16.5	16.5	16.5	14.9	16.5
87.5°	8.2	8.2	8.2	8.2	8.2	8.2	8.2	8.2	6.6	6.6	6.6
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Cooper Lighting Solutions Photometric Lab  
 1121 Highway 74 South  
 Peachtree City, GA 30269



TEST NUMBER: P584114

CATALOG NUMBER: HCC8W25D010BZ-HM82555827-81WWW

**CANDELA DISTRIBUTION (continued):**

	100°	105°	110°	112.5°	115°	120°	125°	130°	135°	140°	145°
0°	1216.9	1216.9	1216.9	1216.9	1216.9	1216.9	1216.9	1216.9	1216.9	1216.9	1216.9
2.5°	1210.3	1208.6	1205.4	1205.4	1202.0	1202.0	1200.3	1198.7	1197.0	1195.4	1193.8
5°	1198.7	1192.1	1188.8	1187.2	1183.8	1182.1	1177.2	1173.9	1172.3	1169.0	1165.7
7.5°	1177.2	1170.6	1164.1	1162.3	1160.7	1154.1	1149.2	1144.3	1140.9	1137.6	1134.3
10°	1152.5	1145.9	1137.6	1134.3	1131.0	1122.8	1116.1	1111.2	1104.6	1098.0	1096.3
12.5°	1122.8	1112.8	1103.0	1099.6	1094.7	1086.4	1079.8	1071.6	1066.6	1058.3	1056.7
15°	1088.1	1076.5	1068.3	1060.0	1056.7	1048.5	1036.9	1030.3	1020.4	1017.0	1008.8
17.5°	1046.8	1035.2	1023.7	1020.4	1015.4	1003.9	992.3	984.1	974.1	969.2	964.3
20°	1003.9	989.0	977.4	974.1	967.5	957.6	946.1	937.9	929.6	919.7	914.7
22.5°	954.3	937.9	927.9	919.7	918.1	906.5	893.2	886.6	880.1	871.7	865.2
25°	899.9	885.0	873.4	866.8	863.5	853.6	843.7	835.5	825.5	820.6	812.3
27.5°	843.7	833.9	819.0	812.3	807.4	799.2	787.6	782.6	772.8	766.1	761.2
30°	789.2	774.4	766.1	757.9	752.9	744.6	734.8	729.7	721.5	715.0	709.9
32.5°	729.7	719.9	708.3	705.0	698.4	690.2	683.5	675.3	668.6	662.1	660.4
35°	675.3	662.1	650.6	647.2	642.3	634.0	630.8	625.7	617.5	615.9	609.3
37.5°	615.9	609.3	596.1	591.1	589.5	582.8	576.2	573.0	568.0	563.0	561.3
40°	559.7	551.5	544.8	539.9	536.6	531.7	525.0	523.4	520.1	513.5	511.9
42.5°	506.9	498.6	492.0	490.4	485.5	480.4	477.2	472.2	470.6	468.9	465.6
45°	455.7	450.8	444.2	442.4	440.8	434.2	430.9	427.7	424.4	422.6	419.3
47.5°	409.5	404.6	399.5	397.9	394.6	393.0	388.0	386.4	381.5	379.7	378.1
50°	364.9	361.6	358.2	356.6	353.3	351.7	348.4	345.1	341.8	340.2	338.4
52.5°	325.3	322.0	318.6	317.0	315.3	312.0	308.8	305.5	303.8	302.2	300.5
55°	287.3	284.0	282.4	280.7	279.1	277.3	272.4	270.8	269.1	267.5	264.2
57.5°	252.6	249.3	246.0	246.0	244.4	242.7	239.4	236.1	236.1	232.8	229.5
60°	221.3	218.0	214.6	213.0	211.3	208.0	206.4	204.7	203.1	201.5	198.2
62.5°	188.2	186.6	183.3	183.3	180.0	178.4	176.7	175.1	173.3	170.0	168.4
65°	160.2	158.5	155.2	153.5	153.5	151.9	148.6	146.9	145.3	145.3	143.6
67.5°	133.8	132.0	128.8	127.1	127.1	125.5	123.8	123.8	122.2	120.5	122.2
70°	110.6	107.3	107.3	105.7	105.7	104.0	102.4	102.4	102.4	104.0	104.0
72.5°	87.5	85.8	84.2	84.2	84.2	84.2	82.6	82.6	84.2	85.8	85.8
75°	69.3	67.7	67.7	67.7	66.0	66.0	67.7	67.7	69.3	69.3	69.3
77.5°	51.1	51.1	51.1	51.1	51.1	51.1	52.9	52.9	54.5	54.5	54.5
80°	38.0	38.0	38.0	38.0	38.0	39.6	39.6	39.6	39.6	39.6	41.3
82.5°	26.4	26.4	26.4	26.4	26.4	26.4	26.4	28.0	28.0	28.0	28.0
85°	14.9	16.5	16.5	16.5	16.5	16.5	16.5	16.5	16.5	16.5	16.5
87.5°	6.6	6.6	6.6	6.6	6.6	6.6	6.6	6.6	6.6	6.6	6.6
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0



Cooper Lighting Solutions Photometric Lab  
 1121 Highway 74 South  
 Peachtree City, GA 30269



TEST NUMBER: P584114

CATALOG NUMBER: HCC8W25D010BZ-HM82555827-81WWW

**CANDELA DISTRIBUTION (continued):**

	150°	155°	157.5°	160°	165°	170°	175°	180°
0°	1216.9	1216.9	1216.9	1216.9	1216.9	1216.9	1216.9	1216.9
2.5°	1192.1	1192.1	1192.1	1193.8	1190.5	1190.5	1190.5	1190.5
5°	1164.1	1162.3	1160.7	1162.3	1159.0	1159.0	1157.4	1157.4
7.5°	1129.4	1127.7	1126.1	1126.1	1122.8	1122.8	1121.1	1119.4
10°	1091.4	1088.1	1089.7	1086.4	1084.8	1083.2	1081.4	1079.8
12.5°	1050.1	1046.8	1045.2	1041.9	1038.5	1036.9	1038.5	1035.2
15°	1005.5	1000.6	999.0	995.6	992.3	990.7	990.7	989.0
17.5°	955.9	952.7	951.0	947.7	946.1	942.8	941.2	939.5
20°	909.7	901.5	903.2	899.9	898.2	891.6	891.6	893.2
22.5°	858.6	853.6	850.3	847.0	845.4	842.1	842.1	840.4
25°	807.4	802.4	800.8	797.5	795.9	792.5	790.8	790.8
27.5°	757.9	751.2	751.2	747.9	744.6	743.0	741.3	739.7
30°	705.0	700.1	698.4	698.4	696.8	696.8	691.9	693.5
32.5°	655.5	652.2	650.6	647.2	647.2	645.5	645.5	640.6
35°	605.9	601.0	602.6	599.3	597.7	596.1	597.7	596.1
37.5°	558.1	554.8	554.8	551.5	551.5	549.8	548.2	551.5
40°	510.2	508.6	506.9	505.3	506.9	505.3	501.9	503.5
42.5°	462.3	462.3	460.6	460.6	459.0	459.0	459.0	459.0
45°	419.3	417.7	417.7	416.1	416.1	416.1	416.1	414.4
47.5°	376.4	374.8	374.8	374.8	373.1	373.1	371.5	373.1
50°	335.1	335.1	333.5	333.5	335.1	333.5	331.9	331.9
52.5°	297.2	297.2	295.5	295.5	293.9	292.2	293.9	293.9
55°	262.6	260.9	259.3	259.3	257.5	255.9	255.9	257.5
57.5°	229.5	227.8	226.2	226.2	222.9	221.3	221.3	221.3
60°	198.2	194.8	194.8	193.1	193.1	191.5	191.5	191.5
62.5°	168.4	166.8	166.8	166.8	166.8	165.1	165.1	165.1
65°	143.6	143.6	143.6	145.3	145.3	146.9	146.9	146.9
67.5°	123.8	125.5	125.5	125.5	127.1	127.1	127.1	125.5
70°	105.7	105.7	105.7	107.3	107.3	107.3	107.3	107.3
72.5°	87.5	87.5	87.5	87.5	87.5	87.5	87.5	87.5
75°	69.3	71.0	71.0	71.0	69.3	71.0	71.0	69.3
77.5°	54.5	54.5	54.5	54.5	54.5	54.5	54.5	54.5
80°	41.3	41.3	41.3	41.3	41.3	41.3	41.3	41.3
82.5°	28.0	28.0	28.0	28.0	28.0	28.0	28.0	28.0
85°	16.5	16.5	16.5	16.5	16.5	16.5	16.5	16.5
87.5°	6.6	6.6	6.6	6.6	6.6	6.6	6.6	6.6
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Classified  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Classified  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Classified  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°    - - 45°-225°    - - - - 90°-270°

Classified  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Classified  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Classified  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Classified  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report





Classified  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Classified  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)