

Classified  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269



Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: HALO COMMERCIAL

Report Number: P584157

Luminaire Tested: **HCC8S25D010BZ-HM82555840-81RWWC**

Issue Date: 10/21/2021

**Test Information**

Test Method: LM-41-14  
Report Number: P584157  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2109-368-14)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 10/21/2021  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: HALO COMMERCIAL  
Catalog Number: HCC8S25D010BZ-HM82555840-81RWWC  
Description: HALO COMMERCIAL 8" ROUND, NEW CONSTRUCTION FRAME, WITH 8" WALLWASH DISTRIBUTION, SPECULAR TRIM  
Light Source: (1) HIGH LUMEN LED 80CRI / 4000K CCT  
CYLINDER  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**


Lumens per Lamp: N/A  
Luminaire Lumens: 2636.2 lumens  
Efficiency: N/A  
Efficacy: 98.4 lumens/watt  
Spacing Criteria (0/90/45): 1.15 / 1.08 / 1.17  
Luminous Opening: Circular (Dia: 0.67' x H: 0')  
CIE Type: Direct

Input Watts (W): 26.8  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P584157  
CATALOG NUMBER: HCC8S25D010BZ-HM82555840-81RWWC

### Luminous Intensity Polar Plot

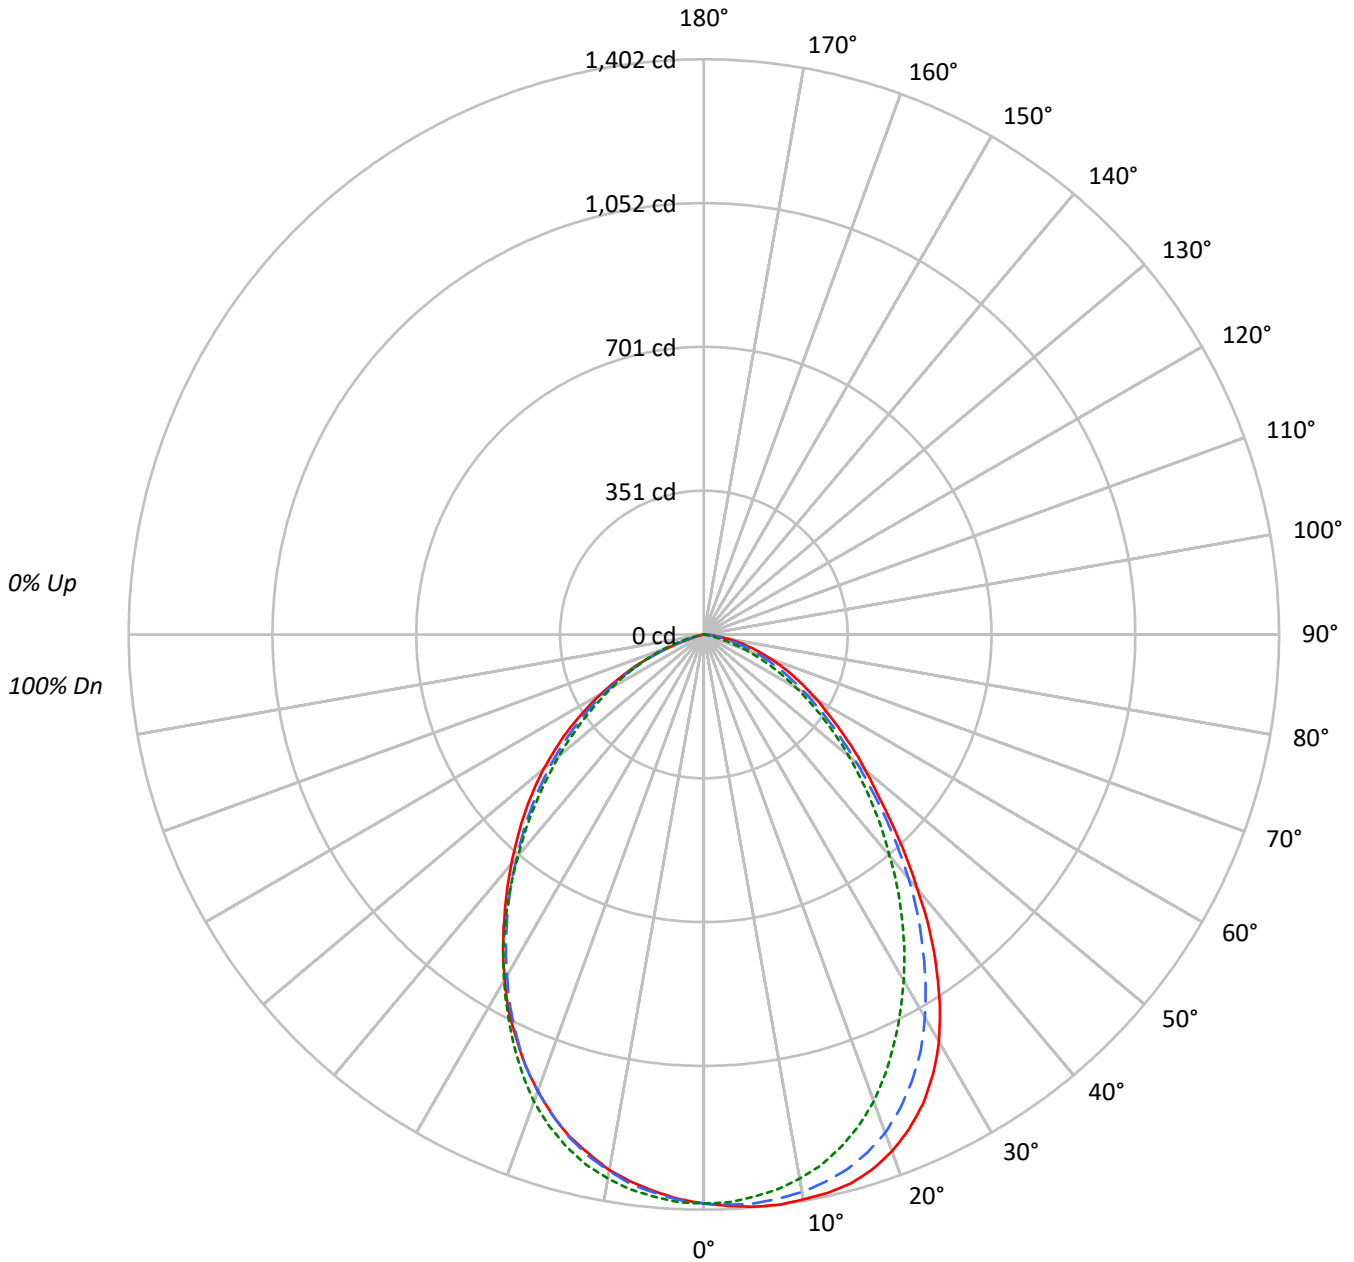

Cooper Lighting Solutions Photometric Lab  
 1121 Highway 74 South  
 Peachtree City, GA 30269



TEST NUMBER: P584157

CATALOG NUMBER: HCC8S25D010BZ-HM82555840-81RWWC

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20					20					20					20					20					
RC	80					70					50					30					10					0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0		
RCR																										
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100					100			
1	111	107	104	101	108	105	102	99	101	98	96	97	95	93	93	92	90	88					88			
2	103	96	90	85	100	94	89	84	91	86	82	87	84	81	84	82	79	77					77			
3	95	86	79	73	93	84	78	73	82	76	72	79	74	70	76	73	69	67					67			
4	88	77	70	64	86	76	69	64	74	68	63	72	66	62	69	65	61	59					59			
5	81	70	62	56	80	69	62	56	67	61	56	65	59	55	63	58	54	52					52			
6	76	64	56	50	74	63	55	50	61	55	50	60	54	49	58	53	49	47					47			
7	71	59	51	45	69	58	50	45	56	50	45	55	49	44	54	48	44	42					42			
8	66	54	46	41	65	53	46	41	52	45	40	51	45	40	50	44	40	38					38			
9	62	50	42	37	61	49	42	37	48	42	37	47	41	37	46	41	37	35					35			
10	58	46	39	34	57	46	39	34	45	38	34	44	38	34	43	38	34	32					32			

**AVERAGE LUMINANCE (cd/sqm):**

	0°	90°	180°
0°	42770	42770	42770
5°	43336	42590	42190
10°	43780	42155	41517
15°	44221	41268	40438
20°	43995	39743	38830
25°	42972	37362	36862
30°	40816	34684	34553
35°	37159	31651	31930
40°	32573	28327	29369
45°	28106	25197	26977
50°	24610	22125	24433
55°	21800	19015	21505
60°	19643	15992	17817
65°	17701	12835	13644
70°	15534	9350	7519
75°	13237	4861	1990
80°	10211	1314	320
85°	6545	0	0



TEST NUMBER: P584157  
 CATALOG NUMBER: HCC8S25D010BZ-HM82555840-81RWWC

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	130.9	5.0
10°-20°	367.9	14.0
20°-30°	522.2	19.8
30°-40°	549.7	20.9
40°-50°	467.6	17.7
50°-60°	337.9	12.8
60°-70°	192.2	7.3
70°-80°	60.6	2.3
80°-90°	7.4	0.3
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1020.9	38.7
0°-40°	1570.6	59.6
0°-60°	2376.1	90.1
0°-90°	2636.2	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	2636.2	100.0

**CANDELA DISTRIBUTION:**

	0°	45°	90°	135°	180°	Flux
0°	1387	1387	1387	1387	1387	
5°	1400	1393	1376	1367	1363	134
15°	1385	1350	1293	1269	1267	390
25°	1263	1200	1098	1080	1083	578
35°	987	930	841	835	848	614
45°	644	620	578	593	619	501
55°	406	376	354	374	400	366
65°	243	209	176	174	187	241
75°	111	85	41	18	17	120
85°	18	11	0	0	0	24
90°	0	0	0	0	0	

Cooper Lighting Solutions Photometric Lab  
 1121 Highway 74 South  
 Peachtree City, GA 30269



TEST NUMBER: P584157

CATALOG NUMBER: HCC8S25D010BZ-HM82555840-81RWWC

**CANDELA DISTRIBUTION (FULL):**

	0°	5°	10°	15°	20°	22.5°	25°	30°	35°	40°	45°
0°	1387.0	1387.0	1387.0	1387.0	1387.0	1387.0	1387.0	1387.0	1387.0	1387.0	1387.0
2.5°	1394.4	1396.4	1392.6	1392.6	1396.4	1392.6	1394.4	1394.4	1392.6	1392.6	1390.8
5°	1400.0	1398.2	1398.2	1398.2	1400.0	1396.4	1394.4	1396.4	1392.6	1392.6	1392.6
7.5°	1401.9	1401.9	1400.0	1398.2	1398.2	1398.2	1396.4	1394.4	1392.6	1388.9	1387.0
10°	1398.2	1398.2	1400.0	1396.4	1396.4	1392.6	1392.6	1388.9	1388.9	1385.2	1379.7
12.5°	1394.4	1392.6	1392.6	1388.9	1388.9	1385.2	1385.2	1379.7	1377.8	1372.3	1366.7
15°	1385.2	1383.4	1379.7	1377.8	1375.9	1374.1	1370.3	1368.5	1363.0	1355.6	1350.0
17.5°	1366.7	1364.8	1363.0	1359.3	1355.6	1353.8	1351.8	1346.3	1338.9	1333.3	1324.1
20°	1340.7	1338.9	1338.9	1333.3	1331.5	1325.9	1324.1	1316.7	1311.2	1300.1	1292.7
22.5°	1305.6	1307.4	1303.7	1300.1	1296.3	1290.7	1287.1	1279.6	1270.4	1259.3	1250.0
25°	1263.0	1264.8	1261.1	1257.5	1251.9	1248.2	1244.5	1233.4	1224.1	1211.1	1200.0
27.5°	1209.3	1209.3	1209.3	1205.6	1196.4	1194.4	1190.8	1179.7	1166.7	1155.6	1144.5
30°	1146.3	1144.5	1144.5	1138.9	1135.2	1127.8	1122.2	1113.0	1103.7	1090.8	1077.8
32.5°	1070.4	1072.2	1066.7	1062.9	1057.4	1057.4	1050.0	1042.6	1031.5	1018.5	1005.6
35°	987.1	988.9	985.1	983.3	974.1	972.2	970.4	961.1	953.7	944.5	929.6
37.5°	901.9	900.0	898.2	898.2	892.6	889.0	885.2	879.6	868.5	861.1	853.8
40°	809.2	809.2	809.2	807.4	805.6	801.9	800.0	796.3	788.9	781.5	776.0
42.5°	725.9	725.9	724.1	722.2	718.5	720.4	716.7	712.9	705.6	700.0	696.4
45°	644.5	644.5	644.5	646.3	642.6	637.1	637.1	633.3	629.6	626.0	620.4
47.5°	572.2	577.8	574.1	572.2	574.1	566.7	566.7	562.9	559.3	555.5	548.2
50°	513.0	513.0	513.0	509.3	507.4	507.4	501.8	498.2	496.3	492.6	485.2
52.5°	459.2	455.6	455.6	453.7	451.9	448.1	448.1	444.5	437.1	433.4	427.8
55°	405.5	405.5	403.7	401.9	400.0	398.1	396.3	390.8	387.0	381.5	375.9
57.5°	357.4	361.1	359.3	355.6	351.8	351.8	348.2	344.4	338.9	333.3	327.7
60°	318.5	316.7	316.7	314.8	311.2	309.2	307.4	301.8	296.3	290.7	285.2
62.5°	277.8	277.8	277.8	274.0	270.4	268.6	266.6	263.0	255.5	250.0	246.3
65°	242.6	240.8	238.9	237.0	235.2	231.4	229.6	225.9	220.4	214.9	209.3
67.5°	207.4	205.5	205.5	203.7	198.2	196.3	196.3	190.8	185.2	179.7	174.1
70°	172.3	172.3	172.3	168.5	166.7	164.8	163.0	159.2	153.8	148.2	142.6
72.5°	142.6	140.7	140.7	138.9	133.3	131.5	129.7	125.9	120.4	116.6	113.0
75°	111.1	111.1	109.2	107.4	105.6	103.7	101.9	98.1	92.6	87.0	85.2
77.5°	85.2	83.4	83.4	81.5	77.8	76.0	76.0	72.2	66.7	62.9	59.3
80°	57.5	59.3	57.5	55.5	53.7	51.9	50.0	48.2	44.4	40.8	37.0
82.5°	35.2	37.0	35.2	35.2	33.4	31.5	31.5	27.8	25.9	24.1	22.3
85°	18.5	18.5	18.5	18.5	16.7	16.7	16.7	14.8	12.9	11.1	11.1
87.5°	5.6	7.4	5.6	5.6	5.6	5.6	5.6	5.6	3.7	3.7	3.7
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Cooper Lighting Solutions Photometric Lab  
 1121 Highway 74 South  
 Peachtree City, GA 30269



TEST NUMBER: P584157

CATALOG NUMBER: HCC8S25D010BZ-HM82555840-81RWWC

**CANDELA DISTRIBUTION (continued):**

	50°	55°	60°	65°	67.5°	70°	75°	80°	85°	90°	95°
0°	1387.0	1387.0	1387.0	1387.0	1387.0	1387.0	1387.0	1387.0	1387.0	1387.0	1387.0
2.5°	1392.6	1390.8	1388.9	1388.9	1388.9	1388.9	1388.9	1387.0	1385.2	1385.2	1385.2
5°	1388.9	1388.9	1388.9	1387.0	1385.2	1385.2	1381.5	1379.7	1377.8	1375.9	1374.1
7.5°	1385.2	1381.5	1379.7	1377.8	1375.9	1375.9	1372.3	1368.5	1368.5	1364.8	1361.1
10°	1374.1	1372.3	1368.5	1364.8	1363.0	1361.1	1357.4	1351.8	1350.0	1346.3	1342.6
12.5°	1361.1	1357.4	1353.8	1346.3	1344.5	1342.6	1335.3	1329.7	1325.9	1324.1	1314.8
15°	1344.5	1337.1	1331.5	1322.2	1320.4	1316.7	1311.2	1305.6	1298.1	1292.7	1288.9
17.5°	1314.8	1307.4	1298.1	1288.9	1285.2	1285.2	1276.0	1268.6	1259.3	1255.5	1248.2
20°	1279.6	1270.4	1263.0	1251.9	1246.3	1240.8	1235.2	1224.1	1216.7	1211.1	1201.8
22.5°	1239.0	1225.9	1216.7	1205.6	1196.4	1190.8	1181.5	1172.3	1163.0	1157.4	1150.0
25°	1187.1	1175.9	1161.2	1150.0	1144.5	1137.1	1126.0	1116.7	1107.4	1098.1	1094.5
27.5°	1129.6	1114.8	1101.9	1088.9	1083.4	1077.8	1064.9	1053.7	1046.4	1037.0	1033.3
30°	1066.7	1051.9	1037.0	1025.9	1020.4	1011.2	1003.8	990.7	981.5	974.1	964.8
32.5°	994.5	983.3	970.4	953.7	950.1	942.6	931.5	926.0	914.8	909.3	901.9
35°	916.7	909.3	896.3	883.4	877.8	874.1	864.9	853.8	846.3	840.8	837.1
37.5°	842.6	833.3	820.4	811.2	807.4	801.9	790.7	785.2	777.8	774.0	766.7
40°	763.0	753.7	744.5	738.9	733.4	729.6	722.2	716.7	709.3	703.7	701.8
42.5°	685.2	679.7	672.3	664.8	663.0	657.4	653.7	648.2	642.6	640.7	635.2
45°	614.8	609.3	601.9	594.5	592.6	588.9	587.0	581.4	577.8	577.8	577.8
47.5°	544.4	538.9	531.5	527.8	529.6	522.3	522.3	520.3	516.7	516.7	518.5
50°	481.5	474.1	472.2	468.6	464.8	461.2	463.0	457.4	457.4	461.2	459.2
52.5°	422.2	414.8	413.0	409.3	407.5	407.5	405.5	405.5	403.7	405.5	405.5
55°	368.5	362.9	359.3	355.6	353.7	353.7	353.7	351.8	350.0	353.7	355.6
57.5°	320.4	318.5	314.8	309.2	307.4	305.6	303.7	303.7	303.7	303.7	305.6
60°	277.8	274.0	270.4	264.8	264.8	263.0	261.1	259.3	259.3	259.3	259.3
62.5°	240.8	235.2	229.6	225.9	224.1	222.2	220.4	216.7	216.7	216.7	216.7
65°	203.7	198.2	194.4	190.8	187.0	187.0	183.3	181.5	177.8	175.9	172.3
67.5°	168.5	164.8	161.1	155.6	153.8	151.8	148.2	146.3	140.7	138.9	137.1
70°	137.1	131.5	127.8	124.1	122.2	118.6	114.8	111.1	107.4	103.7	100.0
72.5°	107.4	101.9	98.1	94.5	90.7	90.7	85.2	81.5	76.0	72.2	66.7
75°	79.6	74.0	70.4	64.8	62.9	61.1	55.5	51.9	46.3	40.8	37.0
77.5°	53.7	50.0	46.3	40.8	37.0	37.0	31.5	27.8	24.1	18.5	16.7
80°	33.4	29.6	25.9	22.3	22.3	18.5	16.7	12.9	9.3	7.4	5.6
82.5°	18.5	16.7	14.8	11.1	11.1	9.3	7.4	5.6	3.7	1.8	1.8
85°	9.3	7.4	5.6	5.6	3.7	3.7	3.7	1.8	1.8	0.0	0.0
87.5°	3.7	1.8	1.8	1.8	1.8	1.8	0.0	0.0	0.0	0.0	0.0
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Cooper Lighting Solutions Photometric Lab  
 1121 Highway 74 South  
 Peachtree City, GA 30269



TEST NUMBER: P584157

CATALOG NUMBER: HCC8S25D010BZ-HM82555840-81RWWC

**CANDELA DISTRIBUTION (continued):**

	100°	105°	110°	112.5°	115°	120°	125°	130°	135°	140°	145°
0°	1387.0	1387.0	1387.0	1387.0	1387.0	1387.0	1387.0	1387.0	1387.0	1387.0	1387.0
2.5°	1383.4	1383.4	1381.5	1381.5	1381.5	1379.7	1381.5	1379.7	1379.7	1379.7	1381.5
5°	1375.9	1372.3	1372.3	1370.3	1370.3	1368.5	1370.3	1368.5	1366.7	1364.8	1366.7
7.5°	1361.1	1357.4	1355.6	1353.8	1353.8	1353.8	1351.8	1350.0	1351.8	1346.3	1350.0
10°	1340.7	1338.9	1335.3	1333.3	1331.5	1333.3	1331.5	1327.8	1327.8	1327.8	1325.9
12.5°	1314.8	1311.2	1309.3	1307.4	1303.7	1303.7	1305.6	1301.9	1301.9	1298.1	1298.1
15°	1283.4	1279.6	1276.0	1276.0	1272.2	1272.2	1270.4	1270.4	1268.6	1266.7	1266.7
17.5°	1244.5	1239.0	1235.2	1237.0	1235.2	1233.4	1233.4	1229.6	1227.8	1229.6	1229.6
20°	1198.2	1194.4	1190.8	1192.6	1188.9	1187.1	1188.9	1183.3	1185.2	1185.2	1185.2
22.5°	1146.3	1144.5	1138.9	1138.9	1135.2	1133.3	1135.2	1135.2	1137.1	1135.2	1135.2
25°	1088.9	1085.2	1081.4	1081.4	1079.6	1077.8	1079.6	1081.4	1079.6	1081.4	1081.4
27.5°	1027.8	1022.3	1022.3	1018.5	1018.5	1020.4	1018.5	1020.4	1022.3	1022.3	1025.9
30°	961.1	959.3	957.4	955.6	955.6	957.4	957.4	957.4	959.3	963.0	963.0
32.5°	898.2	894.4	890.8	890.8	894.4	892.6	894.4	894.4	898.2	898.2	901.9
35°	829.7	829.7	825.9	827.8	827.8	827.8	827.8	831.5	835.2	837.1	840.8
37.5°	766.7	761.1	763.0	763.0	764.8	763.0	768.6	768.6	772.2	772.2	776.0
40°	698.2	698.2	700.0	698.2	700.0	700.0	703.7	707.4	709.3	712.9	714.9
42.5°	633.3	637.1	633.3	635.2	637.1	638.9	640.7	642.6	650.0	653.7	659.2
45°	574.1	576.0	577.8	579.6	577.8	581.4	583.4	587.0	592.6	594.5	596.3
47.5°	516.7	518.5	520.3	522.3	522.3	525.9	527.8	531.5	535.2	537.0	538.9
50°	461.2	464.8	466.6	466.6	468.6	472.2	475.9	475.9	479.7	485.2	487.1
52.5°	411.1	411.1	414.8	416.7	418.5	418.5	424.0	426.0	427.8	431.5	435.2
55°	355.6	361.1	362.9	362.9	366.7	370.3	372.3	374.1	374.1	381.5	381.5
57.5°	307.4	309.2	313.0	313.0	313.0	318.5	318.5	322.2	324.1	325.9	329.7
60°	259.3	263.0	263.0	264.8	263.0	266.6	268.6	272.2	274.0	276.0	277.8
62.5°	214.9	214.9	216.7	216.7	216.7	216.7	220.4	220.4	224.1	225.9	227.8
65°	172.3	172.3	172.3	172.3	172.3	172.3	172.3	172.3	174.1	174.1	177.8
67.5°	133.3	131.5	127.8	129.7	127.8	127.8	125.9	125.9	127.8	127.8	131.5
70°	96.3	94.5	90.7	90.7	88.9	87.0	85.2	83.4	81.5	81.5	81.5
72.5°	62.9	59.3	53.7	51.9	51.9	48.2	44.4	42.6	42.6	42.6	42.6
75°	31.5	27.8	24.1	22.3	22.3	18.5	20.3	18.5	18.5	18.5	18.5
77.5°	12.9	9.3	7.4	7.4	7.4	5.6	5.6	5.6	5.6	5.6	5.6
80°	3.7	1.8	1.8	1.8	1.8	1.8	1.8	1.8	1.8	1.8	1.8
82.5°	1.8	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
85°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
87.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0



Cooper Lighting Solutions Photometric Lab  
 1121 Highway 74 South  
 Peachtree City, GA 30269



TEST NUMBER: P584157

CATALOG NUMBER: HCC8S25D010BZ-HM82555840-81RWWC

**CANDELA DISTRIBUTION (continued):**

	150°	155°	157.5°	160°	165°	170°	175°	180°
0°	1387.0	1387.0	1387.0	1387.0	1387.0	1387.0	1387.0	1387.0
2.5°	1379.7	1379.7	1375.9	1377.8	1377.8	1377.8	1377.8	1377.8
5°	1363.0	1364.8	1363.0	1364.8	1364.8	1363.0	1363.0	1363.0
7.5°	1346.3	1348.2	1346.3	1348.2	1348.2	1348.2	1346.3	1346.3
10°	1325.9	1325.9	1325.9	1325.9	1325.9	1324.1	1325.9	1325.9
12.5°	1298.1	1298.1	1298.1	1300.1	1300.1	1298.1	1298.1	1296.3
15°	1268.6	1264.8	1266.7	1268.6	1266.7	1266.7	1266.7	1266.7
17.5°	1227.8	1229.6	1227.8	1227.8	1227.8	1227.8	1229.6	1227.8
20°	1185.2	1185.2	1187.1	1185.2	1185.2	1185.2	1185.2	1183.3
22.5°	1137.1	1135.2	1135.2	1137.1	1137.1	1135.2	1137.1	1137.1
25°	1083.4	1085.2	1083.4	1083.4	1085.2	1085.2	1085.2	1083.4
27.5°	1025.9	1027.8	1029.7	1027.8	1027.8	1027.8	1029.7	1031.5
30°	966.6	970.4	966.6	966.6	970.4	968.6	970.4	970.4
32.5°	903.7	909.3	905.5	909.3	909.3	911.1	909.3	911.1
35°	840.8	846.3	846.3	846.3	848.2	850.0	850.0	848.2
37.5°	781.5	783.3	783.3	787.1	788.9	790.7	790.7	788.9
40°	720.4	724.1	725.9	725.9	725.9	729.6	733.4	729.6
42.5°	661.2	663.0	664.8	664.8	668.5	670.4	672.3	672.3
45°	603.7	607.4	609.3	611.1	613.0	616.6	614.8	618.6
47.5°	544.4	550.0	551.9	553.7	557.5	559.3	561.1	562.9
50°	490.7	494.4	494.4	498.2	503.8	503.8	507.4	509.3
52.5°	437.1	438.9	440.7	442.6	446.3	450.0	450.0	453.7
55°	385.2	387.0	387.0	388.9	390.8	398.1	400.0	400.0
57.5°	331.5	331.5	335.2	337.0	338.9	342.6	342.6	342.6
60°	279.6	281.5	281.5	283.3	285.2	288.9	290.7	288.9
62.5°	227.8	229.6	229.6	231.4	235.2	237.0	235.2	235.2
65°	179.7	181.5	181.5	183.3	187.0	187.0	185.2	187.0
67.5°	131.5	131.5	131.5	131.5	131.5	131.5	131.5	131.5
70°	83.4	81.5	79.6	81.5	81.5	81.5	79.6	83.4
72.5°	40.8	42.6	42.6	42.6	42.6	42.6	42.6	40.8
75°	18.5	18.5	16.7	16.7	16.7	18.5	18.5	16.7
77.5°	5.6	5.6	5.6	5.6	5.6	5.6	5.6	5.6
80°	1.8	1.8	1.8	1.8	1.8	1.8	1.8	1.8
82.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
85°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
87.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Classified  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Classified  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Classified  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°    - - 45°-225°    - - - - 90°-270°

Classified  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Classified  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Classified  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Classified  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report





Classified  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Classified  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)