

Classified  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269



Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: HALO COMMERCIAL

Report Number: P584199

Luminaire Tested: **HCC8S25D010MB-HM82555930-81WWW**

Issue Date: 10/21/2021

**Test Information**

Test Method: LM-41-14  
Report Number: P584199  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2109-368-16)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 10/21/2021  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: HALO COMMERCIAL  
Catalog Number: HCC8S25D010MB-HM82555930-81WWW  
Description: HALO COMMERCIAL 8" ROUND, NEW CONSTRUCTION FRAME, WITH 8" WALLWASH DISTRIBUTION, WHITE TRIM  
Light Source: (1) HIGH LUMEN LED 90CRI / 3000K CCT  
CYLINDER  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**


Lumens per Lamp: N/A  
Luminaire Lumens: 2156.2 lumens  
Efficiency: N/A  
Efficacy: 80.5 lumens/watt  
Spacing Criteria (0/90/45): 1.09 / 1.04 / 1.13  
Luminous Opening: Circular (Dia: 0.67' x H: 0')  
CIE Type: Direct

Input Watts (W): 26.8  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P584199  
CATALOG NUMBER: HCC8S25D010MB-HM82555930-81WWW

### Luminous Intensity Polar Plot

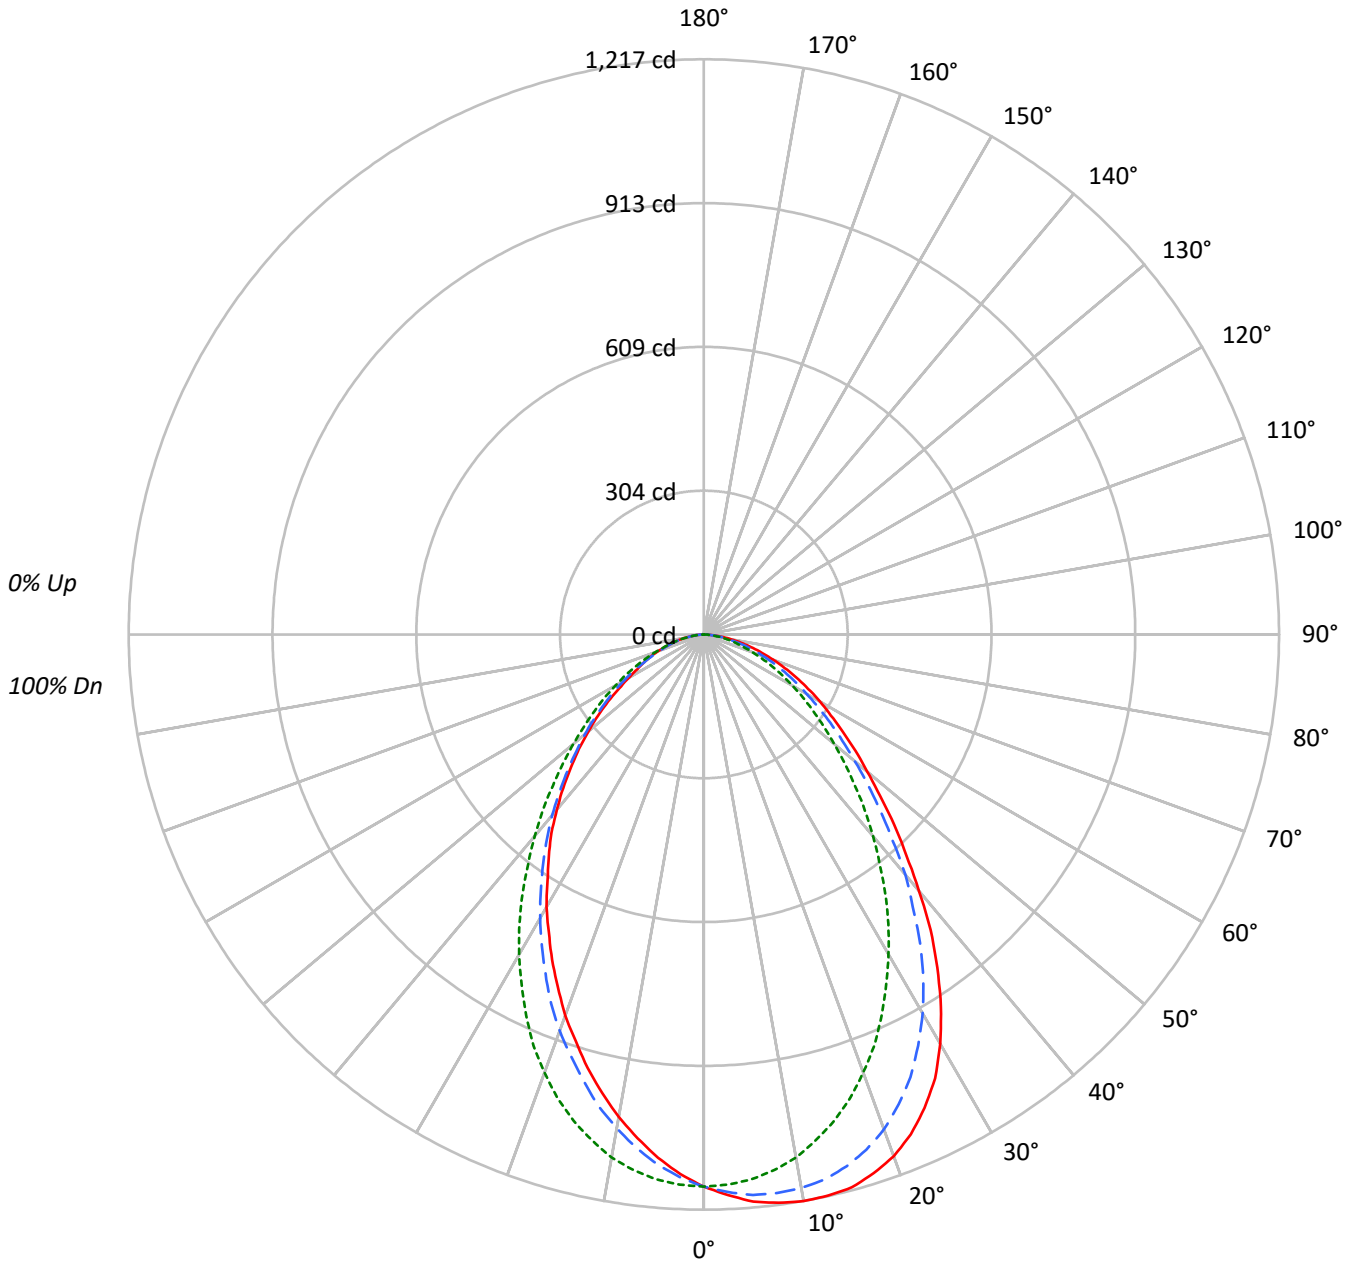

Cooper Lighting Solutions Photometric Lab  
 1121 Highway 74 South  
 Peachtree City, GA 30269



TEST NUMBER: P584199

CATALOG NUMBER: HCC8S25D010MB-HM82555930-81WWW

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20					20					20					20					20					
RC	80					70					50					30					10					0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0		
RCR																										
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100					100			
1	110	106	103	99	108	104	101	98	100	97	95	96	94	92	93	91	89	87					87			
2	102	95	89	84	99	93	88	83	90	85	81	86	83	79	83	80	78	76					76			
3	94	85	78	72	92	83	77	71	81	75	70	78	73	69	75	71	68	66					66			
4	87	76	69	63	85	75	68	62	73	67	62	71	65	61	68	64	60	58					58			
5	81	69	61	55	79	68	61	55	66	60	54	64	59	54	63	57	53	51					51			
6	75	63	55	49	73	62	55	49	61	54	49	59	53	48	57	52	48	46					46			
7	70	58	50	44	69	57	50	44	56	49	44	54	48	44	53	48	43	41					41			
8	66	53	46	40	64	53	45	40	51	45	40	50	44	40	49	44	39	38					38			
9	62	49	42	37	60	49	42	37	48	41	36	47	41	36	46	40	36	34					34			
10	58	46	39	34	57	45	38	34	44	38	33	44	38	33	43	37	33	32					32			

**AVERAGE LUMINANCE (cd/sqm):**

	0°	90°	180°
0°	36026	36026	36026
5°	37294	35820	34399
10°	38119	35192	32461
15°	38663	34009	30315
20°	38545	32356	28142
25°	37597	30261	25838
30°	35617	27827	23711
35°	32404	25184	21540
40°	28464	22397	19463
45°	24818	19703	17352
50°	21602	17261	15284
55°	19257	15171	13295
60°	17503	13297	11342
65°	15731	11572	10295
70°	14011	9863	9286
75°	12272	8316	7935
80°	10406	6766	7032
85°	7819	5024	5590



TEST NUMBER: P584199  
 CATALOG NUMBER: HCC8S25D010MB-HM82555930-81WWW

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	109.4	5.1
10°-20°	301.5	14.0
20°-30°	418.5	19.4
30°-40°	432.7	20.1
40°-50°	362.3	16.8
50°-60°	263.0	12.2
60°-70°	166.0	7.7
70°-80°	82.2	3.8
80°-90°	20.4	0.9
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	829.5	38.5
0°-40°	1262.2	58.5
0°-60°	1887.6	87.5
0°-90°	2156.2	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	2156.2	100.0

**CANDELA DISTRIBUTION:**

	0°	45°	90°	135°	180°	Flux
0°	1168	1168	1168	1168	1168	
5°	1205	1191	1157	1126	1111	115
15°	1211	1165	1065	980	950	341
25°	1105	1034	889	793	759	506
35°	861	797	669	593	572	536
45°	569	528	452	408	398	440
55°	358	327	282	258	247	323
65°	216	189	159	140	141	215
75°	103	86	70	67	67	111
85°	22	17	14	16	16	27
90°	0	0	0	0	0	

Cooper Lighting Solutions Photometric Lab  
 1121 Highway 74 South  
 Peachtree City, GA 30269



TEST NUMBER: P584199

CATALOG NUMBER: HCC8S25D010MB-HM82555930-81WWW

**CANDELA DISTRIBUTION (FULL):**

	0°	5°	10°	15°	20°	22.5°	25°	30°	35°	40°	45°
0°	1168.3	1168.3	1168.3	1168.3	1168.3	1168.3	1168.3	1168.3	1168.3	1168.3	1168.3
2.5°	1187.4	1187.4	1189.0	1187.4	1187.4	1187.4	1185.8	1185.8	1184.2	1184.2	1181.1
5°	1204.8	1201.6	1204.8	1201.6	1201.6	1201.6	1200.1	1196.9	1195.3	1192.1	1190.6
7.5°	1212.7	1211.1	1211.1	1209.5	1209.5	1208.0	1206.4	1204.8	1198.5	1196.9	1192.1
10°	1217.4	1215.9	1215.9	1214.3	1211.1	1211.1	1208.0	1206.4	1198.5	1195.3	1189.0
12.5°	1215.9	1215.9	1215.9	1214.3	1209.5	1208.0	1204.8	1200.1	1193.7	1187.4	1181.1
15°	1211.1	1211.1	1208.0	1206.4	1201.6	1198.5	1196.9	1189.0	1182.7	1174.6	1165.2
17.5°	1195.3	1195.3	1193.7	1190.6	1185.8	1182.7	1179.5	1171.5	1165.2	1152.5	1143.0
20°	1174.6	1173.1	1171.5	1166.7	1162.0	1160.4	1155.7	1144.6	1136.7	1127.1	1114.4
22.5°	1144.6	1143.0	1141.4	1138.3	1130.3	1127.1	1123.9	1116.0	1101.8	1092.3	1076.4
25°	1105.0	1105.0	1101.8	1097.0	1089.0	1085.9	1081.1	1073.2	1060.6	1046.2	1033.6
27.5°	1059.0	1057.4	1052.7	1049.5	1043.1	1038.3	1030.4	1020.9	1008.3	997.1	981.3
30°	1000.3	1000.3	997.1	992.4	984.5	981.3	975.0	963.9	951.1	936.9	925.8
32.5°	933.7	933.7	929.0	925.8	921.1	913.1	911.5	898.9	887.8	876.7	864.0
35°	860.8	862.4	859.2	852.9	845.0	845.0	841.8	830.6	818.0	806.9	797.4
37.5°	787.8	783.1	781.5	778.4	773.6	767.3	764.1	759.4	748.3	740.3	726.1
40°	707.1	708.7	705.5	702.2	700.7	695.9	694.3	686.4	678.5	669.0	662.7
42.5°	634.1	634.1	634.1	631.0	627.8	623.1	621.5	616.6	607.1	600.8	591.3
45°	569.1	564.3	564.3	562.8	561.2	558.0	553.3	550.1	543.8	539.0	527.9
47.5°	505.7	507.3	505.7	504.1	499.4	497.8	496.2	489.8	483.5	478.7	470.8
50°	450.3	453.4	450.3	450.3	447.0	445.4	442.3	437.5	432.8	424.9	417.0
52.5°	404.2	404.2	402.6	401.0	396.3	393.1	391.5	390.0	382.1	375.7	369.4
55°	358.2	359.8	359.8	355.1	353.5	350.3	348.7	344.0	340.8	331.3	326.6
57.5°	318.6	317.0	318.6	315.4	312.3	309.1	307.5	304.4	299.6	293.3	287.0
60°	283.8	280.6	280.6	279.1	275.8	274.2	271.0	266.3	261.6	255.2	250.5
62.5°	248.9	247.3	245.7	244.2	241.0	239.4	237.8	233.0	228.2	223.5	218.8
65°	215.6	215.6	214.0	210.8	209.3	207.7	206.1	202.9	196.6	193.5	188.6
67.5°	185.4	183.9	183.9	180.7	177.5	176.0	176.0	172.8	168.0	163.3	160.1
70°	155.4	157.0	155.4	153.8	150.5	150.5	147.4	145.8	139.5	137.9	133.2
72.5°	128.4	128.4	126.8	126.8	123.7	122.1	122.1	118.9	115.8	112.6	109.4
75°	103.0	103.0	103.0	101.4	99.8	96.7	96.7	95.1	91.9	88.8	85.6
77.5°	80.9	79.3	79.3	77.7	76.1	74.5	74.5	73.0	69.8	68.2	64.9
80°	58.6	57.0	57.0	57.0	53.9	55.5	53.9	52.3	50.7	49.1	47.5
82.5°	38.1	39.6	39.6	38.1	36.5	36.5	36.5	34.9	34.9	33.3	31.7
85°	22.1	22.1	22.1	22.1	20.7	20.7	20.7	19.0	19.0	19.0	17.4
87.5°	9.5	9.5	9.5	9.5	9.5	9.5	7.9	7.9	7.9	7.9	7.9
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Cooper Lighting Solutions Photometric Lab  
 1121 Highway 74 South  
 Peachtree City, GA 30269



TEST NUMBER: P584199

CATALOG NUMBER: HCC8S25D010MB-HM82555930-81WWW

**CANDELA DISTRIBUTION (continued):**

	50°	55°	60°	65°	67.5°	70°	75°	80°	85°	90°	95°
0°	1168.3	1168.3	1168.3	1168.3	1168.3	1168.3	1168.3	1168.3	1168.3	1168.3	1168.3
2.5°	1181.1	1177.9	1176.3	1174.6	1174.6	1173.1	1171.5	1168.3	1168.3	1165.2	1163.6
5°	1187.4	1182.7	1179.5	1176.3	1174.6	1171.5	1168.3	1163.6	1162.0	1157.2	1152.5
7.5°	1189.0	1181.1	1177.9	1171.5	1168.3	1165.2	1158.8	1154.1	1147.8	1143.0	1136.7
10°	1182.7	1176.3	1168.3	1160.4	1158.8	1154.1	1144.6	1138.3	1130.3	1123.9	1114.4
12.5°	1173.1	1163.6	1155.7	1146.2	1141.4	1136.7	1127.1	1117.6	1106.5	1095.5	1085.9
15°	1157.2	1146.2	1135.1	1123.9	1117.6	1112.9	1101.8	1090.7	1079.6	1065.3	1055.8
17.5°	1133.5	1120.8	1109.7	1095.5	1089.0	1084.3	1070.1	1057.4	1043.1	1028.8	1019.4
20°	1103.4	1087.5	1074.8	1059.0	1054.2	1046.2	1032.0	1017.8	1001.9	986.0	975.0
22.5°	1063.7	1047.9	1033.6	1017.8	1009.9	1001.9	987.6	970.2	954.3	941.7	930.6
25°	1017.8	1003.4	986.0	971.8	962.3	952.7	936.9	922.7	908.3	889.4	878.3
27.5°	967.1	949.6	936.9	917.8	908.3	902.0	884.6	865.5	852.9	835.5	822.7
30°	909.9	894.1	879.9	860.8	851.3	845.0	829.1	811.7	799.0	781.5	768.9
32.5°	849.7	832.2	814.8	802.2	791.1	784.7	767.3	756.2	740.3	726.1	711.8
35°	784.7	767.3	754.6	737.1	730.8	724.5	710.2	695.9	681.7	669.0	657.9
37.5°	715.0	702.2	688.0	675.4	670.6	664.3	646.8	634.1	623.1	610.3	600.8
40°	646.8	635.7	626.2	613.5	605.6	600.8	588.2	577.1	564.3	556.4	546.9
42.5°	585.0	572.2	562.8	553.3	545.4	540.6	529.4	521.5	512.0	504.1	493.1
45°	520.0	513.6	502.6	494.7	489.8	483.5	475.6	466.1	458.2	451.8	443.8
47.5°	462.9	456.6	448.7	439.1	435.9	431.2	423.3	417.0	410.6	404.2	396.3
50°	410.6	402.6	396.3	390.0	386.8	382.1	374.2	371.0	366.2	359.8	355.1
52.5°	363.1	356.7	350.3	342.4	340.8	337.7	332.9	326.6	321.9	318.6	315.4
55°	320.3	313.9	309.1	302.8	301.2	298.0	291.7	288.5	285.4	282.2	279.1
57.5°	282.2	275.8	269.5	266.3	263.1	260.0	258.4	253.7	250.5	248.9	245.7
60°	247.3	241.0	236.3	231.4	229.8	228.2	225.1	221.9	218.8	215.6	214.0
62.5°	214.0	207.7	204.5	201.4	198.2	198.2	195.0	191.9	188.6	187.0	183.9
65°	183.9	180.7	176.0	171.2	169.6	169.6	164.9	163.3	161.7	158.6	155.4
67.5°	155.4	152.2	147.4	145.8	144.2	142.6	141.1	137.9	134.7	133.2	130.0
70°	130.0	126.8	123.7	122.1	120.5	118.9	115.8	114.2	111.0	109.4	107.7
72.5°	104.6	103.0	99.8	98.3	96.7	95.1	93.5	91.9	88.8	87.2	85.6
75°	84.0	82.4	79.3	77.7	76.1	76.1	74.5	71.4	69.8	69.8	68.2
77.5°	63.5	61.8	60.2	58.6	57.0	57.0	55.5	53.9	52.3	52.3	50.7
80°	46.0	44.4	42.8	42.8	42.8	41.2	39.6	39.6	38.1	38.1	36.5
82.5°	30.1	30.1	28.6	28.6	28.6	27.0	27.0	25.4	25.4	25.4	25.4
85°	17.4	17.4	17.4	15.8	15.8	15.8	15.8	15.8	15.8	14.2	15.8
87.5°	7.9	7.9	7.9	7.9	7.9	7.9	7.9	7.9	6.3	6.3	6.3
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Cooper Lighting Solutions Photometric Lab  
 1121 Highway 74 South  
 Peachtree City, GA 30269



TEST NUMBER: P584199

CATALOG NUMBER: HCC8S25D010MB-HM82555930-81WWW

**CANDELA DISTRIBUTION (continued):**

	100°	105°	110°	112.5°	115°	120°	125°	130°	135°	140°	145°
0°	1168.3	1168.3	1168.3	1168.3	1168.3	1168.3	1168.3	1168.3	1168.3	1168.3	1168.3
2.5°	1162.0	1160.4	1157.2	1157.2	1154.1	1154.1	1152.5	1150.9	1149.3	1147.8	1146.2
5°	1150.9	1144.6	1141.4	1139.9	1136.7	1135.1	1130.3	1127.1	1125.5	1122.4	1119.2
7.5°	1130.3	1123.9	1117.6	1116.0	1114.4	1108.1	1103.4	1098.6	1095.5	1092.3	1089.0
10°	1106.5	1100.2	1092.3	1089.0	1085.9	1078.0	1071.6	1066.9	1060.6	1054.2	1052.7
12.5°	1078.0	1068.5	1059.0	1055.8	1051.1	1043.1	1036.7	1028.8	1024.1	1016.2	1014.6
15°	1044.7	1033.6	1025.7	1017.8	1014.6	1006.7	995.5	989.2	979.7	976.5	968.6
17.5°	1005.1	993.9	982.9	979.7	975.0	963.9	952.7	944.8	935.3	930.6	925.8
20°	963.9	949.6	938.5	935.3	929.0	919.5	908.3	900.4	892.5	883.0	878.3
22.5°	916.2	900.4	890.9	883.0	881.5	870.3	857.6	851.3	845.0	837.1	830.6
25°	864.0	849.7	838.7	832.2	829.1	819.6	810.1	802.2	792.7	787.8	779.9
27.5°	810.1	800.6	786.3	779.9	775.2	767.3	756.2	751.5	741.9	735.6	730.8
30°	757.8	743.5	735.6	727.6	722.9	715.0	705.5	700.7	692.7	686.4	681.7
32.5°	700.7	691.2	680.1	676.9	670.6	662.7	656.3	648.4	642.0	635.7	634.1
35°	648.4	635.7	624.6	621.5	616.6	608.7	605.6	600.8	592.9	591.3	585.0
37.5°	591.3	585.0	572.2	567.5	565.9	559.6	553.3	550.1	545.4	540.6	539.0
40°	537.5	529.4	523.1	518.4	515.2	510.5	504.1	502.6	499.4	493.1	491.5
42.5°	486.6	478.7	472.4	470.8	466.1	461.3	458.2	453.4	451.8	450.3	447.0
45°	437.5	432.8	426.4	424.9	423.3	417.0	413.8	410.6	407.5	405.9	402.6
47.5°	393.1	388.4	383.6	382.1	378.9	377.3	372.6	371.0	366.2	364.7	363.1
50°	350.3	347.2	344.0	342.4	339.3	337.7	334.5	331.3	328.2	326.6	325.0
52.5°	312.3	309.1	305.9	304.4	302.8	299.6	296.5	293.3	291.7	290.1	288.5
55°	275.8	272.6	271.0	269.5	267.9	266.3	261.6	260.0	258.4	256.8	253.7
57.5°	242.6	239.4	236.3	236.3	234.7	233.0	229.8	226.7	226.7	223.5	220.3
60°	212.4	209.3	206.1	204.5	202.9	199.8	198.2	196.6	195.0	193.5	190.2
62.5°	180.7	179.1	176.0	176.0	172.8	171.2	169.6	168.0	166.5	163.3	161.7
65°	153.8	152.2	149.1	147.4	147.4	145.8	142.6	141.1	139.5	139.5	137.9
67.5°	128.4	126.8	123.7	122.1	122.1	120.5	118.9	118.9	117.3	115.8	117.3
70°	106.3	103.0	103.0	101.4	101.4	99.8	98.3	98.3	98.3	99.8	99.8
72.5°	84.0	82.4	80.9	80.9	80.9	80.9	79.3	79.3	80.9	82.4	82.4
75°	66.6	64.9	64.9	64.9	63.5	63.5	64.9	64.9	66.6	66.6	66.6
77.5°	49.1	49.1	49.1	49.1	49.1	49.1	50.7	50.7	52.3	52.3	52.3
80°	36.5	36.5	36.5	36.5	36.5	38.1	38.1	38.1	38.1	38.1	39.6
82.5°	25.4	25.4	25.4	25.4	25.4	25.4	25.4	27.0	27.0	27.0	27.0
85°	14.2	15.8	15.8	15.8	15.8	15.8	15.8	15.8	15.8	15.8	15.8
87.5°	6.3	6.3	6.3	6.3	6.3	6.3	6.3	6.3	6.3	6.3	6.3
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0





TEST NUMBER: P584199

CATALOG NUMBER: HCC8S25D010MB-HM82555930-81WWW

**CANDELA DISTRIBUTION (continued):**

	150°	155°	157.5°	160°	165°	170°	175°	180°
0°	1168.3	1168.3	1168.3	1168.3	1168.3	1168.3	1168.3	1168.3
2.5°	1144.6	1144.6	1144.6	1146.2	1143.0	1143.0	1143.0	1143.0
5°	1117.6	1116.0	1114.4	1116.0	1112.9	1112.9	1111.3	1111.3
7.5°	1084.3	1082.7	1081.1	1081.1	1078.0	1078.0	1076.4	1074.8
10°	1047.9	1044.7	1046.2	1043.1	1041.5	1039.9	1038.3	1036.7
12.5°	1008.3	1005.1	1003.4	1000.3	997.1	995.5	997.1	993.9
15°	965.5	960.6	959.1	955.9	952.7	951.1	951.1	949.6
17.5°	917.8	914.7	913.1	909.9	908.3	905.2	903.6	902.0
20°	873.4	865.5	867.1	864.0	862.4	856.1	856.1	857.6
22.5°	824.3	819.6	816.4	813.2	811.7	808.5	808.5	806.9
25°	775.2	770.4	768.9	765.7	764.1	761.0	759.4	759.4
27.5°	727.6	721.3	721.3	718.2	715.0	713.4	711.8	710.2
30°	676.9	672.2	670.6	670.6	669.0	669.0	664.3	665.9
32.5°	629.4	626.2	624.6	621.5	621.5	619.9	619.9	615.1
35°	581.8	577.1	578.7	575.4	573.8	572.2	573.8	572.2
37.5°	535.9	532.6	532.6	529.4	529.4	527.9	526.3	529.4
40°	489.8	488.2	486.6	485.1	486.6	485.1	481.9	483.5
42.5°	443.8	443.8	442.3	442.3	440.7	440.7	440.7	440.7
45°	402.6	401.0	401.0	399.5	399.5	399.5	399.5	397.9
47.5°	361.4	359.8	359.8	359.8	358.2	358.2	356.7	358.2
50°	321.9	321.9	320.3	320.3	321.9	320.3	318.6	318.6
52.5°	285.4	285.4	283.8	283.8	282.2	280.6	282.2	282.2
55°	252.1	250.5	248.9	248.9	247.3	245.7	245.7	247.3
57.5°	220.3	218.8	217.2	217.2	214.0	212.4	212.4	212.4
60°	190.2	187.0	187.0	185.4	185.4	183.9	183.9	183.9
62.5°	161.7	160.1	160.1	160.1	160.1	158.6	158.6	158.6
65°	137.9	137.9	137.9	139.5	139.5	141.1	141.1	141.1
67.5°	118.9	120.5	120.5	120.5	122.1	122.1	122.1	120.5
70°	101.4	101.4	101.4	103.0	103.0	103.0	103.0	103.0
72.5°	84.0	84.0	84.0	84.0	84.0	84.0	84.0	84.0
75°	66.6	68.2	68.2	68.2	66.6	68.2	68.2	66.6
77.5°	52.3	52.3	52.3	52.3	52.3	52.3	52.3	52.3
80°	39.6	39.6	39.6	39.6	39.6	39.6	39.6	39.6
82.5°	27.0	27.0	27.0	27.0	27.0	27.0	27.0	27.0
85°	15.8	15.8	15.8	15.8	15.8	15.8	15.8	15.8
87.5°	6.3	6.3	6.3	6.3	6.3	6.3	6.3	6.3
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Classified  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Classified  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Classified  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°    - - 45°-225°    - - - - 90°-270°

Classified  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Classified  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Classified  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Classified  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report





Classified  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Classified  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)