

Classified  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269



Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: HALO COMMERCIAL

Report Number: P584197

Luminaire Tested: **HCC8S25D010MW-HM82555930-81WDWB**

Issue Date: 10/21/2021

**Test Information**

Test Method: LM-41-14  
Report Number: P584197  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2109-368-10)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 10/21/2021  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: HALO COMMERCIAL  
Catalog Number: HCC8S25D010MW-HM82555930-81WDWB  
Description: HALO COMMERCIAL 8" ROUND, NEW CONSTRUCTION FRAME, WITH 8" WIDE DISTRIBUTION, WHITE BAFFLE TRIM  
Light Source: (1) HIGH LUMEN LED 90CRI / 3000K CCT CYLINDER  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**


Lumens per Lamp: N/A  
Luminaire Lumens: 2611.2 lumens  
Efficiency: N/A  
Efficacy: 97.4 lumens/watt  
Spacing Criteria (0/90/45): 1.32 / 1.32 / 1.14  
Luminous Opening: Circular (Dia: 0.67' x H: 0')  
CIE Type: Direct

Input Watts (W): 26.8  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P584197  
CATALOG NUMBER: HCC8S25D010MW-HM82555930-81WDWB

### Luminous Intensity Polar Plot

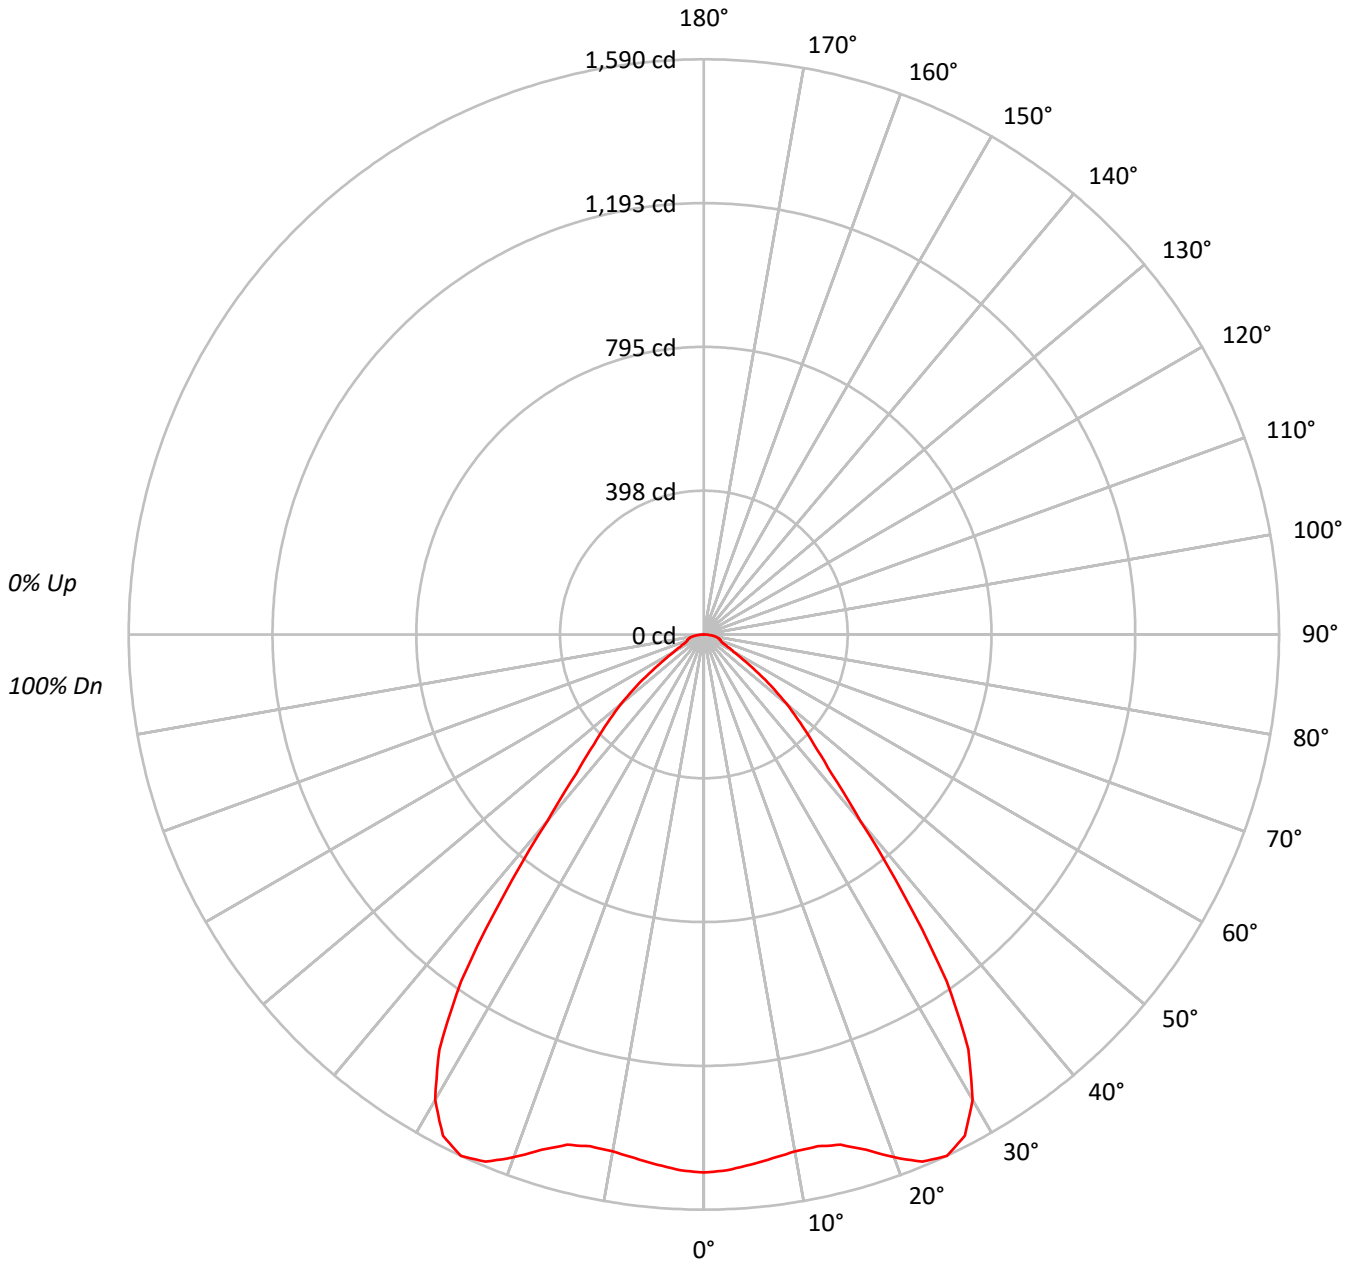



TEST NUMBER: P584197  
 CATALOG NUMBER: HCC8S25D010MW-HM82555930-81WDWB

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20									20									20									20																	
RC	80									50									30									10									0								
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0															
RCR	0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	100	100	100	100	100	100	100	100	100	100																
	1	112	108	105	103	109	106	103	101	102	100	98	98	97	95	95	93	92	90	90	90	90	90	90	90	90	90	90	90																
	2	105	99	94	89	102	97	92	88	93	90	86	90	87	84	88	85	83	81	81	81	81	81	81	81	81	81	81	81																
	3	98	90	84	79	96	88	83	78	86	81	77	83	79	76	81	77	74	73	73	73	73	73	73	73	73	73	73	73																
	4	92	82	75	70	90	81	75	70	79	73	69	77	72	68	75	71	67	65	65	65	65	65	65	65	65	65	65	65																
	5	86	75	68	63	84	74	68	63	73	67	62	71	66	62	69	65	61	59	59	59	59	59	59	59	59	59	59	59																
	6	80	69	62	57	79	69	62	57	67	61	56	65	60	56	64	59	56	54	54	54	54	54	54	54	54	54	54	54																
	7	75	64	57	52	74	63	57	52	62	56	51	61	55	51	59	55	51	49	49	49	49	49	49	49	49	49	49	49																
	8	71	59	52	47	69	59	52	47	58	51	47	56	51	47	55	50	47	45	45	45	45	45	45	45	45	45	45	45																
	9	67	55	48	43	65	55	48	43	54	47	43	53	47	43	52	47	43	41	41	41	41	41	41	41	41	41	41	41																
	10	63	51	45	40	62	51	44	40	50	44	40	49	44	40	48	43	40	38	38	38	38	38	38	38	38	38	38	38																

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	45860
5°	45546
10°	45424
15°	46616
20°	50467
25°	54105
30°	52897
35°	44051
40°	27063
45°	18739
50°	14301
55°	9376
60°	5865
65°	4392
70°	4427
75°	5099
80°	5629
85°	5024



TEST NUMBER: P584197  
 CATALOG NUMBER: HCC8S25D010MW-HM82555930-81WDWB

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	139.8	5.4
10°-20°	419.2	16.1
20°-30°	721.6	27.6
30°-40°	699.2	26.8
40°-50°	344.4	13.2
50°-60°	162.5	6.2
60°-70°	64.0	2.5
70°-80°	44.2	1.7
80°-90°	16.4	0.6
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1280.6	49.0
0°-40°	1979.8	75.8
0°-60°	2486.7	95.2
0°-90°	2611.2	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	2611.2	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	1487	
5°	1471	140
15°	1460	419
25°	1590	722
35°	1170	699
45°	430	344
55°	174	163
65°	60	64
75°	43	44
85°	14	16
90°	0	



TEST NUMBER: P584197  
CATALOG NUMBER: HCC8S25D010MW-HM82555930-81WDWB

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	1487.2
2.5°	1482.5
5°	1471.4
7.5°	1460.2
10°	1450.7
12.5°	1449.2
15°	1460.2
17.5°	1493.5
20°	1537.9
22.5°	1577.6
25°	1590.2
27.5°	1561.8
30°	1485.6
32.5°	1360.4
35°	1170.2
37.5°	908.5
40°	672.3
42.5°	521.6
45°	429.7
47.5°	361.4
50°	298.1
52.5°	234.7
55°	174.4
57.5°	126.8
60°	95.1
62.5°	74.5
65°	60.2
67.5°	52.3
70°	49.1
72.5°	46.0
75°	42.8
77.5°	38.1
80°	31.7
82.5°	23.8
85°	14.2
87.5°	6.3
90°	0.0

Classified  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Classified  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report





Classified  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Classified  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Classified  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Classified  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)