

Classified  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269



Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: HALO COMMERCIAL

Report Number: P584233

Luminaire Tested: **HCC8W25D010SL-HM82555940-81WWW**

Issue Date: 10/21/2021

**Test Information**

Test Method: LM-41-14  
Report Number: P584233  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2109-368-16)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 10/21/2021  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: HALO COMMERCIAL  
Catalog Number: HCC8W25D010SL-HM82555940-81WWW  
Description: HALO COMMERCIAL 8" ROUND, NEW CONSTRUCTION FRAME, WITH 8" WALLWASH DISTRIBUTION, WHITE TRIM  
Light Source: (1) HIGH LUMEN LED 90CRI / 4000K CCT  
CYLINDER  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**


Lumens per Lamp: N/A  
Luminaire Lumens: 2396.3 lumens  
Efficiency: N/A  
Efficacy: 89.4 lumens/watt  
Spacing Criteria (0/90/45): 1.09 / 1.04 / 1.13  
Luminous Opening: Circular (Dia: 0.67' x H: 0')  
CIE Type: Direct

Input Watts (W): 26.8  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P584233  
CATALOG NUMBER: HCC8W25D010SL-HM82555940-81WWW

### Luminous Intensity Polar Plot

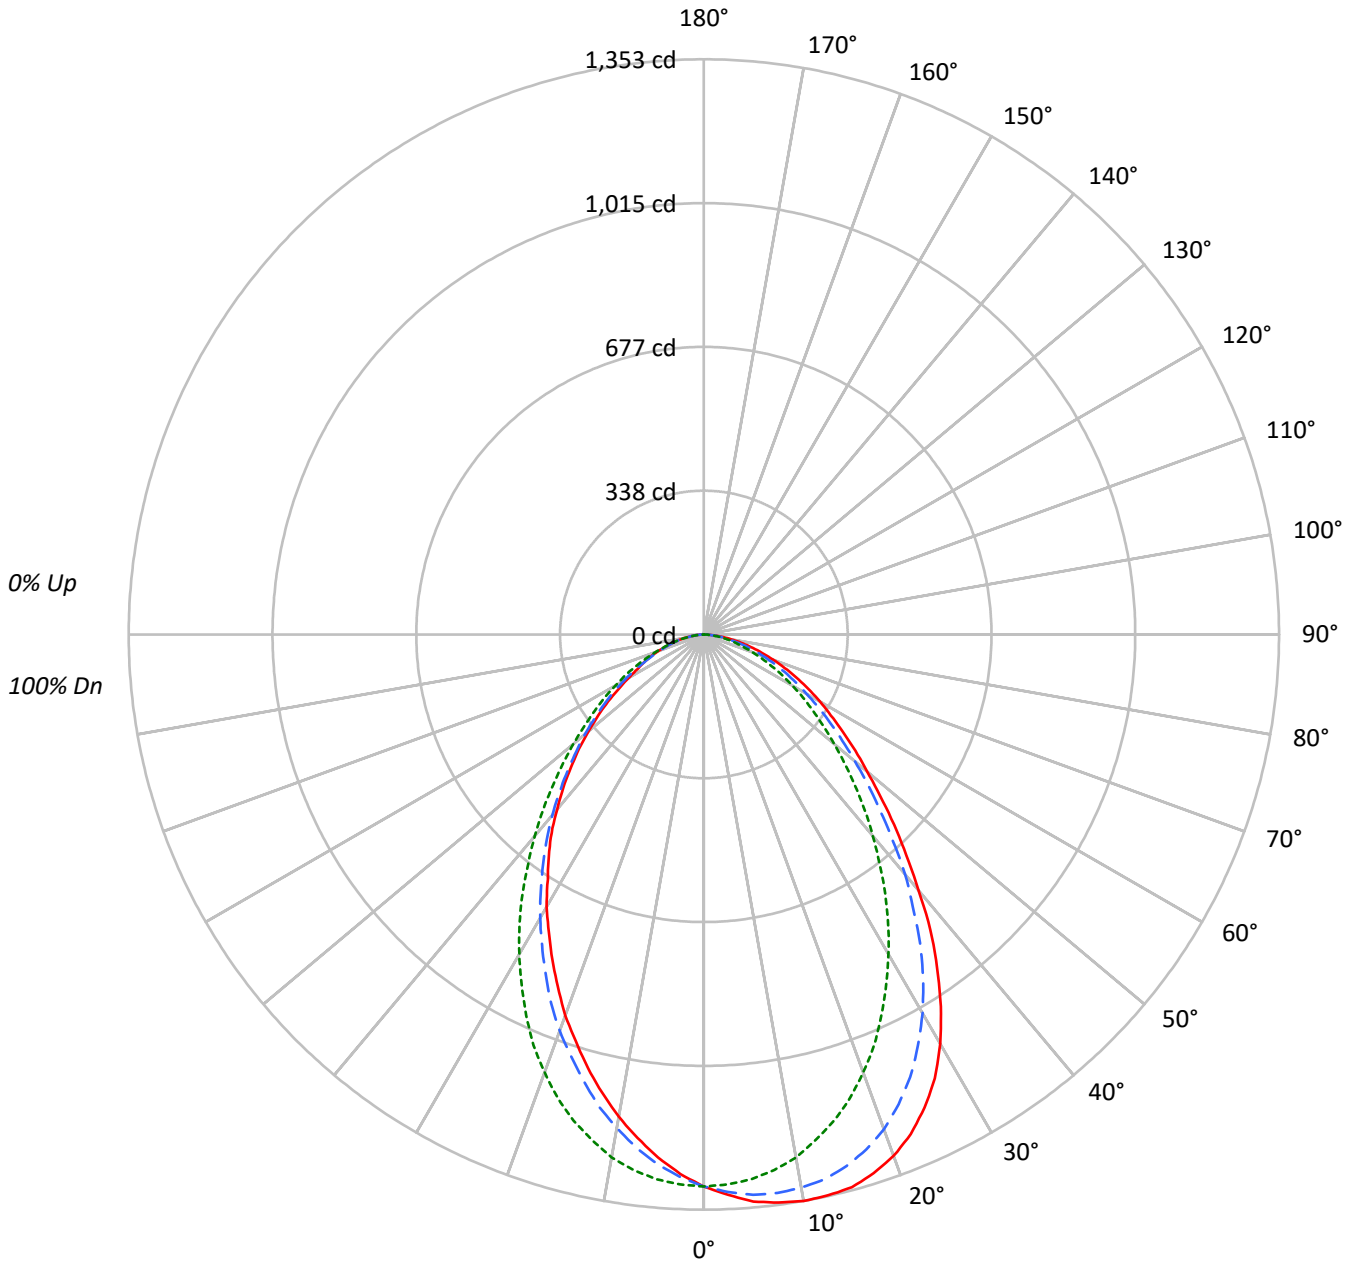



TEST NUMBER: P584233

CATALOG NUMBER: HCC8W25D010SL-HM82555940-81WWW

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20					20					20					20					20					
RC	80					70					50					30					10					0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0		
RCR																										
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100					100			
1	110	106	103	99	108	104	101	98	100	97	95	96	94	92	93	91	89	87					87			
2	102	95	89	84	99	93	88	83	90	85	81	86	83	79	83	80	78	76					76			
3	94	85	78	72	92	83	77	71	81	75	70	78	73	69	75	71	68	66					66			
4	87	76	69	63	85	75	68	62	73	67	62	71	65	61	68	64	60	58					58			
5	81	69	61	55	79	68	61	55	66	60	54	64	59	54	63	57	53	51					51			
6	75	63	55	49	73	62	55	49	61	54	49	59	53	48	57	52	48	46					46			
7	70	58	50	44	69	57	50	44	56	49	44	54	48	44	53	48	43	41					41			
8	66	53	46	40	64	53	45	40	51	45	40	50	44	40	49	44	39	38					38			
9	62	49	42	37	60	49	42	37	48	41	36	47	41	36	46	40	36	34					34			
10	58	46	39	34	57	45	38	34	44	38	33	44	38	33	43	37	33	32					32			

**AVERAGE LUMINANCE (cd/sqm):**

	0°	90°	180°
0°	40038	40038	40038
5°	41444	39807	38228
10°	42365	39112	36078
15°	42970	37792	33686
20°	42837	35959	31280
25°	41778	33629	28713
30°	39580	30924	26345
35°	36010	27985	23942
40°	31628	24893	21632
45°	27583	21892	19284
50°	24001	19189	16987
55°	21402	16860	14779
60°	19445	14777	12606
65°	17482	12849	11441
70°	15571	10963	10323
75°	13642	9234	8817
80°	11578	7512	7831
85°	8739	5590	6262



TEST NUMBER: P584233  
 CATALOG NUMBER: HCC8W25D010SL-HM82555940-81WWW

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	121.6	5.1
10°-20°	335.1	14.0
20°-30°	465.1	19.4
30°-40°	480.9	20.1
40°-50°	402.7	16.8
50°-60°	292.3	12.2
60°-70°	184.5	7.7
70°-80°	91.4	3.8
80°-90°	22.7	0.9
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	921.8	38.5
0°-40°	1402.7	58.5
0°-60°	2097.7	87.5
0°-90°	2396.3	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	2396.3	100.0

**CANDELA DISTRIBUTION:**

	0°	45°	90°	135°	180°	Flux
0°	1298	1298	1298	1298	1298	
5°	1339	1323	1286	1251	1235	128
15°	1346	1295	1184	1089	1055	379
25°	1228	1149	988	881	844	563
35°	957	886	743	659	636	596
45°	632	587	502	453	442	489
55°	398	363	314	287	275	359
65°	240	210	176	155	157	239
75°	114	95	78	74	74	123
85°	25	19	16	18	18	30
90°	0	0	0	0	0	

Cooper Lighting Solutions Photometric Lab  
 1121 Highway 74 South  
 Peachtree City, GA 30269



TEST NUMBER: P584233

CATALOG NUMBER: HCC8W25D010SL-HM82555940-81WWW

**CANDELA DISTRIBUTION (FULL):**

	0°	5°	10°	15°	20°	22.5°	25°	30°	35°	40°	45°
0°	1298.4	1298.4	1298.4	1298.4	1298.4	1298.4	1298.4	1298.4	1298.4	1298.4	1298.4
2.5°	1319.5	1319.5	1321.3	1319.5	1319.5	1319.5	1317.8	1317.8	1316.0	1316.0	1312.5
5°	1338.9	1335.4	1338.9	1335.4	1335.4	1335.4	1333.6	1330.1	1328.4	1324.9	1323.1
7.5°	1347.8	1346.0	1346.0	1344.2	1344.2	1342.4	1340.7	1338.9	1331.8	1330.1	1324.9
10°	1353.0	1351.3	1351.3	1349.5	1346.0	1346.0	1342.4	1340.7	1331.8	1328.4	1321.3
12.5°	1351.3	1351.3	1351.3	1349.5	1344.2	1342.4	1338.9	1333.6	1326.6	1319.5	1312.5
15°	1346.0	1346.0	1342.4	1340.7	1335.4	1331.8	1330.1	1321.3	1314.3	1305.4	1294.9
17.5°	1328.4	1328.4	1326.6	1323.1	1317.8	1314.3	1310.8	1302.0	1294.9	1280.8	1270.2
20°	1305.4	1303.7	1302.0	1296.6	1291.4	1289.6	1284.3	1272.0	1263.1	1252.6	1238.5
22.5°	1272.0	1270.2	1268.5	1265.0	1256.1	1252.6	1249.1	1240.2	1224.4	1213.8	1196.3
25°	1227.9	1227.9	1224.4	1219.2	1210.3	1206.7	1201.5	1192.7	1178.6	1162.8	1148.6
27.5°	1176.9	1175.1	1169.8	1166.3	1159.2	1154.0	1145.1	1134.5	1120.5	1108.1	1090.5
30°	1111.6	1111.6	1108.1	1102.8	1094.1	1090.5	1083.5	1071.2	1057.1	1041.2	1028.8
32.5°	1037.7	1037.7	1032.3	1028.8	1023.6	1014.8	1013.0	999.0	986.5	974.2	960.1
35°	956.6	958.4	954.9	947.8	939.0	939.0	935.5	923.2	909.1	896.8	886.2
37.5°	875.6	870.3	868.5	865.0	859.7	852.7	849.2	843.9	831.5	822.7	806.9
40°	785.7	787.5	784.0	780.5	778.6	773.4	771.7	762.8	754.0	743.4	736.4
42.5°	704.7	704.7	704.7	701.2	697.6	692.4	690.6	685.3	674.7	667.7	657.1
45°	632.5	627.2	627.2	625.4	623.7	620.2	614.8	611.3	604.2	599.0	586.7
47.5°	562.0	563.8	562.0	560.3	554.9	553.2	551.5	544.4	537.4	532.0	523.2
50°	500.3	503.9	500.3	500.3	496.8	495.1	491.6	486.2	481.0	472.2	463.3
52.5°	449.3	449.3	447.5	445.8	440.4	436.9	435.2	433.4	424.6	417.5	410.5
55°	398.1	400.0	400.0	394.6	392.9	389.4	387.6	382.3	378.8	368.2	362.9
57.5°	354.1	352.4	354.1	350.6	347.1	343.6	341.8	338.2	333.0	325.9	318.9
60°	315.3	311.8	311.8	310.1	306.6	304.7	301.2	296.0	290.7	283.7	278.3
62.5°	276.6	274.9	273.1	271.4	267.8	266.0	264.3	258.9	253.7	248.5	243.1
65°	239.6	239.6	237.9	234.3	232.5	230.8	229.0	225.6	218.5	215.0	209.6
67.5°	206.1	204.4	204.4	200.8	197.3	195.6	195.6	192.1	186.7	181.5	177.9
70°	172.7	174.4	172.7	170.9	167.3	167.3	163.8	162.1	155.0	153.2	148.0
72.5°	142.7	142.7	140.9	140.9	137.4	135.7	135.7	132.1	128.6	125.1	121.6
75°	114.5	114.5	114.5	112.8	111.0	107.4	107.4	105.7	102.2	98.7	95.1
77.5°	89.9	88.1	88.1	86.3	84.5	82.8	82.8	81.0	77.5	75.8	72.2
80°	65.2	63.5	63.5	63.5	59.9	61.6	59.9	58.1	56.4	54.6	52.9
82.5°	42.3	44.1	44.1	42.3	40.6	40.6	40.6	38.7	38.7	37.0	35.2
85°	24.7	24.7	24.7	24.7	22.9	22.9	22.9	21.2	21.2	21.2	19.4
87.5°	10.6	10.6	10.6	10.6	10.6	10.6	8.8	8.8	8.8	8.8	8.8
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Cooper Lighting Solutions Photometric Lab  
 1121 Highway 74 South  
 Peachtree City, GA 30269



TEST NUMBER: P584233

CATALOG NUMBER: HCC8W25D010SL-HM82555940-81WWW

**CANDELA DISTRIBUTION (continued):**

	50°	55°	60°	65°	67.5°	70°	75°	80°	85°	90°	95°
0°	1298.4	1298.4	1298.4	1298.4	1298.4	1298.4	1298.4	1298.4	1298.4	1298.4	1298.4
2.5°	1312.5	1308.9	1307.2	1305.4	1305.4	1303.7	1302.0	1298.4	1298.4	1294.9	1293.1
5°	1319.5	1314.3	1310.8	1307.2	1305.4	1302.0	1298.4	1293.1	1291.4	1286.0	1280.8
7.5°	1321.3	1312.5	1308.9	1302.0	1298.4	1294.9	1287.9	1282.5	1275.5	1270.2	1263.1
10°	1314.3	1307.2	1298.4	1289.6	1287.9	1282.5	1272.0	1265.0	1256.1	1249.1	1238.5
12.5°	1303.7	1293.1	1284.3	1273.7	1268.5	1263.1	1252.6	1242.1	1229.6	1217.3	1206.7
15°	1286.0	1273.7	1261.4	1249.1	1242.1	1236.7	1224.4	1212.1	1199.8	1183.8	1173.4
17.5°	1259.6	1245.6	1233.2	1217.3	1210.3	1205.0	1189.2	1175.1	1159.2	1143.4	1132.8
20°	1226.2	1208.6	1194.4	1176.9	1171.5	1162.8	1146.9	1131.0	1113.4	1095.8	1083.5
22.5°	1182.1	1164.5	1148.6	1131.0	1122.2	1113.4	1097.6	1078.2	1060.6	1046.5	1034.2
25°	1131.0	1115.2	1095.8	1080.0	1069.4	1058.8	1041.2	1025.4	1009.4	988.4	976.1
27.5°	1074.7	1055.2	1041.2	1020.0	1009.4	1002.5	983.0	961.9	947.8	928.4	914.3
30°	1011.3	993.6	977.8	956.6	946.1	939.0	921.4	902.0	887.9	868.5	854.4
32.5°	944.3	924.9	905.5	891.4	879.1	872.0	852.7	840.4	822.7	806.9	791.1
35°	872.0	852.7	838.6	819.2	812.1	805.1	789.2	773.4	757.6	743.4	731.1
37.5°	794.6	780.5	764.6	750.5	745.3	738.2	718.8	704.7	692.4	678.3	667.7
40°	718.8	706.4	695.9	681.8	673.0	667.7	653.6	641.3	627.2	618.4	607.8
42.5°	650.1	636.0	625.4	614.8	606.0	600.8	588.4	579.6	569.0	560.3	547.9
45°	577.8	570.8	558.4	549.7	544.4	537.4	528.5	518.0	509.1	502.0	493.3
47.5°	514.5	507.4	498.6	488.0	484.5	479.1	470.4	463.3	456.2	449.3	440.4
50°	456.2	447.5	440.4	433.4	429.8	424.6	415.8	412.3	406.9	400.0	394.6
52.5°	403.4	396.4	389.4	380.5	378.8	375.2	370.0	362.9	357.6	354.1	350.6
55°	355.9	348.8	343.6	336.5	334.7	331.2	324.2	320.7	317.1	313.6	310.1
57.5°	313.6	306.6	299.5	296.0	292.4	288.9	287.2	281.8	278.3	276.6	273.1
60°	274.9	267.8	262.5	257.2	255.4	253.7	250.2	246.6	243.1	239.6	237.9
62.5°	237.9	230.8	227.3	223.7	220.2	220.2	216.7	213.1	209.6	207.9	204.4
65°	204.4	200.8	195.6	190.2	188.5	188.5	183.2	181.5	179.7	176.1	172.7
67.5°	172.7	169.2	163.8	162.1	160.3	158.6	156.8	153.2	149.8	148.0	144.5
70°	144.5	140.9	137.4	135.7	133.9	132.1	128.6	126.8	123.4	121.6	119.8
72.5°	116.3	114.5	111.0	109.2	107.4	105.7	103.9	102.2	98.7	96.9	95.1
75°	93.4	91.6	88.1	86.3	84.5	84.5	82.8	79.3	77.5	77.5	75.8
77.5°	70.5	68.7	67.0	65.2	63.5	63.5	61.6	59.9	58.1	58.1	56.4
80°	51.0	49.3	47.6	47.6	47.6	45.8	44.1	44.1	42.3	42.3	40.6
82.5°	33.5	33.5	31.7	31.7	31.7	30.0	30.0	28.1	28.1	28.1	28.1
85°	19.4	19.4	19.4	17.7	17.7	17.7	17.7	17.7	17.7	15.8	17.7
87.5°	8.8	8.8	8.8	8.8	8.8	8.8	8.8	8.8	7.1	7.1	7.1
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Cooper Lighting Solutions Photometric Lab  
 1121 Highway 74 South  
 Peachtree City, GA 30269



TEST NUMBER: P584233

CATALOG NUMBER: HCC8W25D010SL-HM82555940-81WWW

**CANDELA DISTRIBUTION (continued):**

	100°	105°	110°	112.5°	115°	120°	125°	130°	135°	140°	145°
0°	1298.4	1298.4	1298.4	1298.4	1298.4	1298.4	1298.4	1298.4	1298.4	1298.4	1298.4
2.5°	1291.4	1289.6	1286.0	1286.0	1282.5	1282.5	1280.8	1279.1	1277.3	1275.5	1273.7
5°	1279.1	1272.0	1268.5	1266.7	1263.1	1261.4	1256.1	1252.6	1250.8	1247.3	1243.8
7.5°	1256.1	1249.1	1242.1	1240.2	1238.5	1231.5	1226.2	1220.9	1217.3	1213.8	1210.3
10°	1229.6	1222.7	1213.8	1210.3	1206.7	1198.0	1190.9	1185.7	1178.6	1171.5	1169.8
12.5°	1198.0	1187.4	1176.9	1173.4	1168.0	1159.2	1152.2	1143.4	1138.1	1129.3	1127.6
15°	1161.0	1148.6	1139.9	1131.0	1127.6	1118.7	1106.4	1099.3	1088.7	1085.2	1076.4
17.5°	1117.0	1104.6	1092.3	1088.7	1083.5	1071.2	1058.8	1050.0	1039.4	1034.2	1028.8
20°	1071.2	1055.2	1042.9	1039.4	1032.3	1021.8	1009.4	1000.7	991.9	981.3	976.1
22.5°	1018.3	1000.7	990.1	981.3	979.5	967.2	953.2	946.1	939.0	930.2	923.2
25°	960.1	944.3	932.0	924.9	921.4	910.8	900.3	891.4	880.8	875.6	866.8
27.5°	900.3	889.7	873.9	866.8	861.5	852.7	840.4	835.0	824.5	817.5	812.1
30°	842.1	826.3	817.5	808.6	803.4	794.6	784.0	778.6	769.9	762.8	757.6
32.5°	778.6	768.2	755.7	752.3	745.3	736.4	729.3	720.5	713.5	706.4	704.7
35°	720.5	706.4	694.1	690.6	685.3	676.6	673.0	667.7	658.9	657.1	650.1
37.5°	657.1	650.1	636.0	630.7	628.9	621.9	614.8	611.3	606.0	600.8	599.0
40°	597.3	588.4	581.3	576.1	572.6	567.3	560.3	558.4	554.9	547.9	546.1
42.5°	540.9	532.0	525.0	523.2	518.0	512.6	509.1	503.9	502.0	500.3	496.8
45°	486.2	481.0	473.9	472.2	470.4	463.3	459.8	456.2	452.7	451.0	447.5
47.5°	436.9	431.6	426.4	424.6	421.0	419.3	414.0	412.3	406.9	405.2	403.4
50°	389.4	385.8	382.3	380.5	377.0	375.2	371.7	368.2	364.7	362.9	361.1
52.5°	347.1	343.6	340.0	338.2	336.5	333.0	329.5	325.9	324.2	322.4	320.7
55°	306.6	303.0	301.2	299.5	297.8	296.0	290.7	288.9	287.2	285.4	281.8
57.5°	269.5	266.0	262.5	262.5	260.8	258.9	255.4	251.9	251.9	248.5	244.9
60°	236.0	232.5	229.0	227.3	225.6	222.0	220.2	218.5	216.7	215.0	211.4
62.5°	200.8	199.1	195.6	195.6	192.1	190.2	188.5	186.7	185.0	181.5	179.7
65°	170.9	169.2	165.6	163.8	163.8	162.1	158.6	156.8	155.0	155.0	153.2
67.5°	142.7	140.9	137.4	135.7	135.7	133.9	132.1	132.1	130.3	128.6	130.3
70°	118.0	114.5	114.5	112.8	112.8	111.0	109.2	109.2	109.2	111.0	111.0
72.5°	93.4	91.6	89.9	89.9	89.9	89.9	88.1	88.1	89.9	91.6	91.6
75°	74.0	72.2	72.2	72.2	70.5	70.5	72.2	72.2	74.0	74.0	74.0
77.5°	54.6	54.6	54.6	54.6	54.6	54.6	56.4	56.4	58.1	58.1	58.1
80°	40.6	40.6	40.6	40.6	40.6	42.3	42.3	42.3	42.3	42.3	44.1
82.5°	28.1	28.1	28.1	28.1	28.1	28.1	28.1	30.0	30.0	30.0	30.0
85°	15.8	17.7	17.7	17.7	17.7	17.7	17.7	17.7	17.7	17.7	17.7
87.5°	7.1	7.1	7.1	7.1	7.1	7.1	7.1	7.1	7.1	7.1	7.1
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0





TEST NUMBER: P584233

CATALOG NUMBER: HCC8W25D010SL-HM82555940-81WWW

**CANDELA DISTRIBUTION (continued):**

	150°	155°	157.5°	160°	165°	170°	175°	180°
0°	1298.4	1298.4	1298.4	1298.4	1298.4	1298.4	1298.4	1298.4
2.5°	1272.0	1272.0	1272.0	1273.7	1270.2	1270.2	1270.2	1270.2
5°	1242.1	1240.2	1238.5	1240.2	1236.7	1236.7	1235.0	1235.0
7.5°	1205.0	1203.3	1201.5	1201.5	1198.0	1198.0	1196.3	1194.4
10°	1164.5	1161.0	1162.8	1159.2	1157.4	1155.7	1154.0	1152.2
12.5°	1120.5	1117.0	1115.2	1111.6	1108.1	1106.4	1108.1	1104.6
15°	1072.9	1067.6	1065.8	1062.3	1058.8	1057.1	1057.1	1055.2
17.5°	1020.0	1016.5	1014.8	1011.3	1009.4	1005.9	1004.2	1002.5
20°	970.7	961.9	963.6	960.1	958.4	951.3	951.3	953.2
22.5°	916.1	910.8	907.3	903.7	902.0	898.5	898.5	896.8
25°	861.5	856.2	854.4	851.0	849.2	845.6	843.9	843.9
27.5°	808.6	801.6	801.6	798.1	794.6	792.8	791.1	789.2
30°	752.3	747.0	745.3	745.3	743.4	743.4	738.2	739.9
32.5°	699.5	695.9	694.1	690.6	690.6	688.9	688.9	683.5
35°	646.6	641.3	643.1	639.5	637.7	636.0	637.7	636.0
37.5°	595.5	591.9	591.9	588.4	588.4	586.7	584.9	588.4
40°	544.4	542.6	540.9	539.1	540.9	539.1	535.5	537.4
42.5°	493.3	493.3	491.6	491.6	489.7	489.7	489.7	489.7
45°	447.5	445.8	445.8	443.9	443.9	443.9	443.9	442.2
47.5°	401.7	400.0	400.0	400.0	398.1	398.1	396.4	398.1
50°	357.6	357.6	355.9	355.9	357.6	355.9	354.1	354.1
52.5°	317.1	317.1	315.3	315.3	313.6	311.8	313.6	313.6
55°	280.1	278.3	276.6	276.6	274.9	273.1	273.1	274.9
57.5°	244.9	243.1	241.4	241.4	237.9	236.0	236.0	236.0
60°	211.4	207.9	207.9	206.1	206.1	204.4	204.4	204.4
62.5°	179.7	177.9	177.9	177.9	177.9	176.1	176.1	176.1
65°	153.2	153.2	153.2	155.0	155.0	156.8	156.8	156.8
67.5°	132.1	133.9	133.9	133.9	135.7	135.7	135.7	133.9
70°	112.8	112.8	112.8	114.5	114.5	114.5	114.5	114.5
72.5°	93.4	93.4	93.4	93.4	93.4	93.4	93.4	93.4
75°	74.0	75.8	75.8	75.8	74.0	75.8	75.8	74.0
77.5°	58.1	58.1	58.1	58.1	58.1	58.1	58.1	58.1
80°	44.1	44.1	44.1	44.1	44.1	44.1	44.1	44.1
82.5°	30.0	30.0	30.0	30.0	30.0	30.0	30.0	30.0
85°	17.7	17.7	17.7	17.7	17.7	17.7	17.7	17.7
87.5°	7.1	7.1	7.1	7.1	7.1	7.1	7.1	7.1
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Classified  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Classified  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Classified  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°    - - 45°-225°    - - - - 90°-270°

Classified  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Classified  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Classified  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Classified  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report





Classified  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Classified  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)