

Classified  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269



Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: HALO COMMERCIAL

Report Number: P584301

Luminaire Tested: **HCC8W30D010BZ-HM82555840-81WWW**

Issue Date: 10/21/2021

**Test Information**

Test Method: LM-41-14  
Report Number: P584301  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2109-368-16)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 10/21/2021  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: HALO COMMERCIAL  
Catalog Number: HCC8W30D010BZ-HM82555840-81WWW  
Description: HALO COMMERCIAL 8" ROUND, NEW CONSTRUCTION FRAME, WITH 8" WALLWASH DISTRIBUTION, WHITE TRIM  
Light Source: (1) HIGH LUMEN LED 80CRI / 4000K CCT  
CYLINDER  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**


Lumens per Lamp: N/A  
Luminaire Lumens: 3387.6 lumens  
Efficiency: N/A  
Efficacy: 121.0 lumens/watt  
Spacing Criteria (0/90/45): 1.09 / 1.04 / 1.13  
Luminous Opening: Circular (Dia: 0.67' x H: 0')  
CIE Type: Direct

Input Watts (W): 28  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P584301  
CATALOG NUMBER: HCC8W30D010BZ-HM82555840-81WWW

### Luminous Intensity Polar Plot

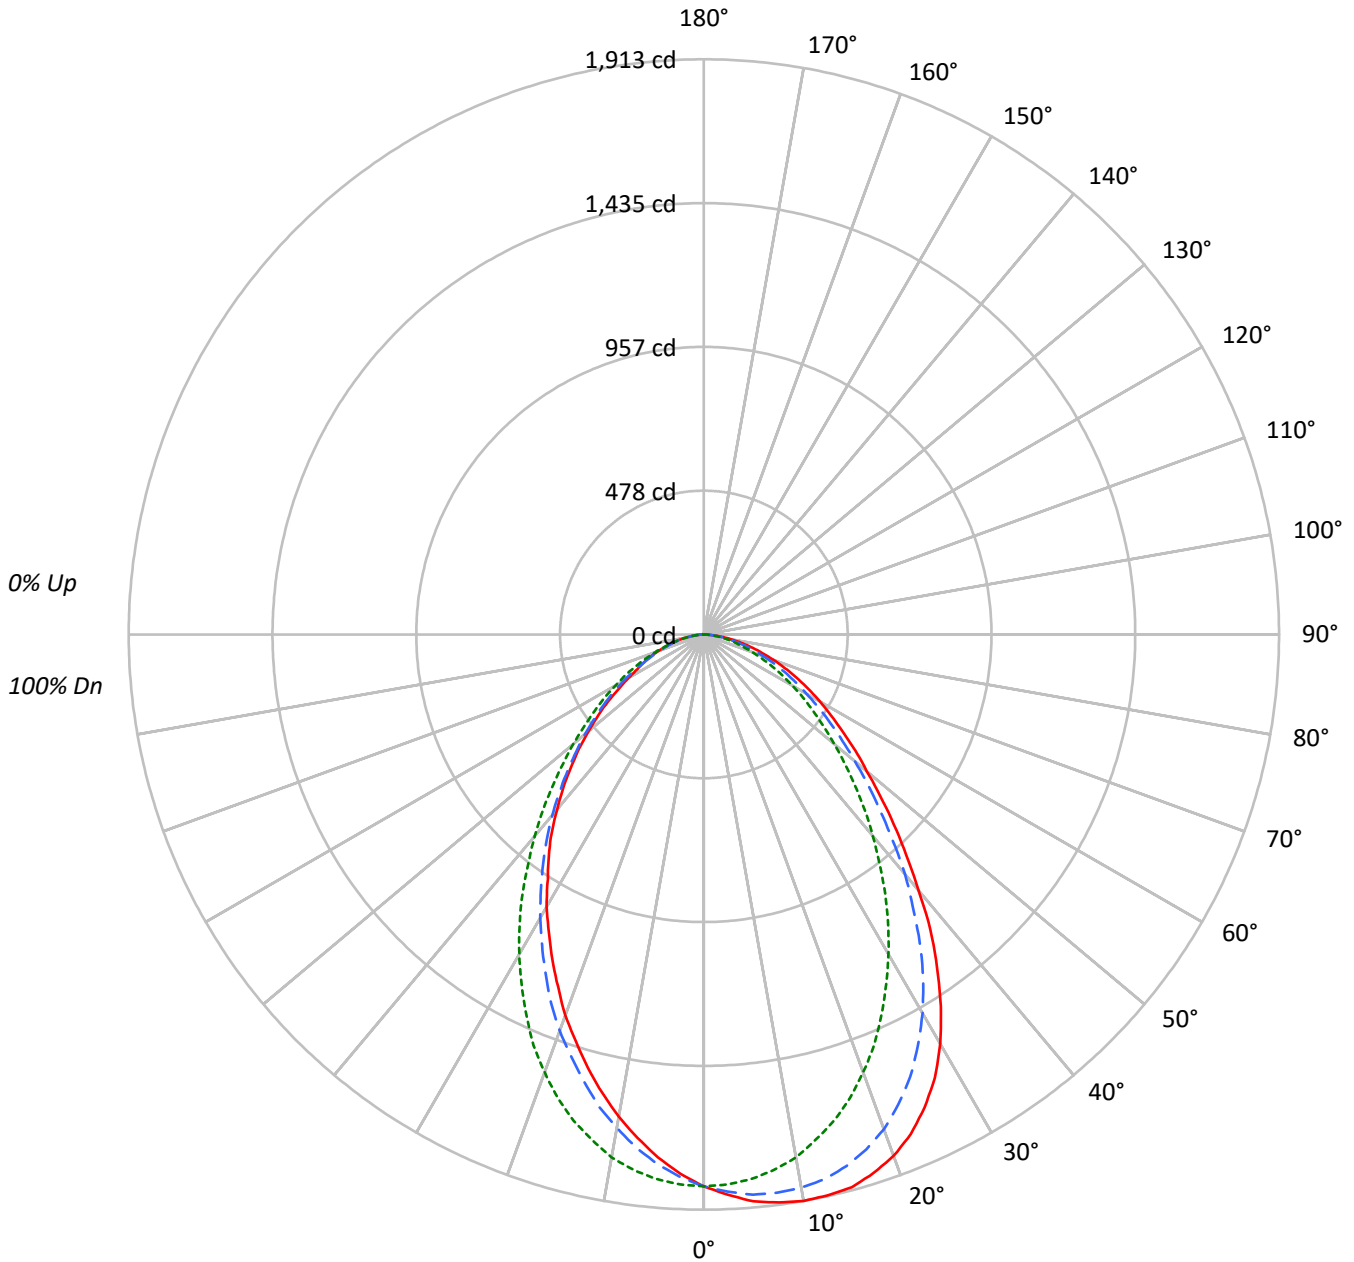

Cooper Lighting Solutions Photometric Lab  
 1121 Highway 74 South  
 Peachtree City, GA 30269



TEST NUMBER: P584301

CATALOG NUMBER: HCC8W30D010BZ-HM82555840-81WWW

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																			
1	110	106	103	99	108	104	101	98	100	97	95	96	94	92	93	91	89	87																			
2	102	95	89	84	99	93	88	83	90	85	81	86	83	79	83	80	78	76																			
3	94	85	78	72	92	83	77	71	81	75	70	78	73	69	75	71	68	66																			
4	87	76	69	63	85	75	68	62	73	67	62	71	65	61	68	64	60	58																			
5	81	69	61	55	79	68	61	55	66	60	54	64	59	54	63	57	53	51																			
6	75	63	55	49	73	62	55	49	61	54	49	59	53	48	57	52	48	46																			
7	70	58	50	44	69	57	50	44	56	49	44	54	48	44	53	48	43	41																			
8	66	53	46	40	64	53	45	40	51	45	40	50	44	40	49	44	39	38																			
9	62	49	42	37	60	49	42	37	48	41	36	47	41	36	46	40	36	34																			
10	58	46	39	34	57	45	38	34	44	38	33	44	38	33	43	37	33	32																			

**AVERAGE LUMINANCE (cd/sqm):**

	0°	90°	180°
0°	56603	56603	56603
5°	58593	56278	54043
10°	59890	55291	51001
15°	60745	53428	47624
20°	60564	50834	44215
25°	59062	47538	40591
30°	55956	43721	37248
35°	50910	39568	33846
40°	44714	35190	30581
45°	38991	30954	27264
50°	33931	27124	24015
55°	30262	23838	20892
60°	27494	20889	17817
65°	24713	18176	16169
70°	22008	15489	14597
75°	19289	13058	12462
80°	16355	10619	11063
85°	12312	7961	8810



TEST NUMBER: P584301  
 CATALOG NUMBER: HCC8W30D010BZ-HM82555840-81WWW

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	171.9	5.1
10°-20°	473.7	14.0
20°-30°	657.6	19.4
30°-40°	679.8	20.1
40°-50°	569.2	16.8
50°-60°	413.2	12.2
60°-70°	260.8	7.7
70°-80°	129.2	3.8
80°-90°	32.1	0.9
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1303.2	38.5
0°-40°	1983.0	58.5
0°-60°	2965.5	87.5
0°-90°	3387.6	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	3387.6	100.0

**CANDELA DISTRIBUTION:**

	0°	45°	90°	135°	180°	Flux
0°	1836	1836	1836	1836	1836	
5°	1893	1870	1818	1768	1746	181
15°	1903	1831	1674	1539	1492	536
25°	1736	1624	1397	1245	1193	795
35°	1352	1253	1051	932	899	842
45°	894	829	710	640	625	692
55°	563	513	443	406	389	508
65°	339	296	249	219	222	338
75°	162	134	110	105	105	174
85°	35	27	22	25	25	42
90°	0	0	0	0	0	



TEST NUMBER: P584301

CATALOG NUMBER: HCC8W30D010BZ-HM82555840-81WWW

**CANDELA DISTRIBUTION (FULL):**

	0°	5°	10°	15°	20°	22.5°	25°	30°	35°	40°	45°
0°	1835.6	1835.6	1835.6	1835.6	1835.6	1835.6	1835.6	1835.6	1835.6	1835.6	1835.6
2.5°	1865.4	1865.4	1867.9	1865.4	1865.4	1865.4	1862.9	1862.9	1860.4	1860.4	1855.4
5°	1892.9	1887.9	1892.9	1887.9	1887.9	1887.9	1885.4	1880.4	1877.9	1872.9	1870.4
7.5°	1905.3	1902.8	1902.8	1900.3	1900.3	1897.8	1895.4	1892.9	1882.9	1880.4	1872.9
10°	1912.7	1910.2	1910.2	1907.8	1902.8	1902.8	1897.8	1895.4	1882.9	1877.9	1867.9
12.5°	1910.2	1910.2	1910.2	1907.8	1900.3	1897.8	1892.9	1885.4	1875.4	1865.4	1855.4
15°	1902.8	1902.8	1897.8	1895.4	1887.9	1882.9	1880.4	1867.9	1857.9	1845.6	1830.6
17.5°	1877.9	1877.9	1875.4	1870.4	1862.9	1857.9	1852.9	1840.6	1830.6	1810.6	1795.7
20°	1845.6	1843.1	1840.6	1833.1	1825.6	1823.1	1815.6	1798.2	1785.8	1770.8	1750.9
22.5°	1798.2	1795.7	1793.2	1788.3	1775.8	1770.8	1765.8	1753.4	1730.9	1716.0	1691.1
25°	1735.9	1735.9	1730.9	1723.5	1711.0	1706.1	1698.6	1686.1	1666.1	1643.8	1623.8
27.5°	1663.6	1661.3	1653.8	1648.8	1638.8	1631.3	1618.8	1604.0	1584.0	1566.6	1541.7
30°	1571.5	1571.5	1566.6	1559.1	1546.7	1541.7	1531.7	1514.3	1494.3	1472.0	1454.5
32.5°	1467.0	1467.0	1459.5	1454.5	1447.0	1434.5	1432.0	1412.2	1394.7	1377.3	1357.4
35°	1352.4	1354.9	1349.9	1339.9	1327.5	1327.5	1322.5	1305.0	1285.2	1267.7	1252.7
37.5°	1237.9	1230.4	1227.9	1222.9	1215.4	1205.4	1200.4	1193.0	1175.6	1163.1	1140.7
40°	1110.8	1113.3	1108.3	1103.3	1100.8	1093.4	1090.9	1078.4	1065.9	1051.1	1041.1
42.5°	996.3	996.3	996.3	991.3	986.3	978.8	976.3	968.8	953.9	943.9	929.0
45°	894.1	886.6	886.6	884.1	881.6	876.6	869.2	864.3	854.3	846.8	829.3
47.5°	794.5	797.0	794.5	792.0	784.5	782.0	779.5	769.6	759.7	752.2	739.7
50°	707.3	712.3	707.3	707.3	702.3	699.8	694.9	687.4	679.9	667.5	655.0
52.5°	635.0	635.0	632.5	630.2	622.7	617.7	615.2	612.7	600.2	590.2	580.4
55°	562.9	565.4	565.4	557.9	555.4	550.4	547.9	540.4	535.5	520.5	513.1
57.5°	500.6	498.1	500.6	495.6	490.7	485.7	483.2	478.2	470.7	460.7	450.7
60°	445.8	440.9	440.9	438.4	433.4	430.9	425.9	418.4	410.9	400.9	393.6
62.5°	391.1	388.6	386.1	383.6	378.6	376.1	373.6	366.1	358.6	351.1	343.7
65°	338.7	338.7	336.2	331.3	328.8	326.3	323.8	318.8	308.8	303.9	296.4
67.5°	291.4	288.9	288.9	283.9	278.9	276.4	276.4	271.4	264.0	256.6	251.6
70°	244.1	246.6	244.1	241.6	236.6	236.6	231.6	229.1	219.1	216.6	209.3
72.5°	201.8	201.8	199.3	199.3	194.3	191.8	191.8	186.8	181.8	176.8	171.8
75°	161.9	161.9	161.9	159.4	156.9	152.0	152.0	149.5	144.5	139.5	134.5
77.5°	127.0	124.5	124.5	122.0	119.5	117.0	117.0	114.6	109.6	107.1	102.1
80°	92.1	89.7	89.7	89.7	84.7	87.2	84.7	82.2	79.7	77.2	74.7
82.5°	59.8	62.3	62.3	59.8	57.3	57.3	57.3	54.8	54.8	52.3	49.8
85°	34.8	34.8	34.8	34.8	32.3	32.3	32.3	29.8	29.8	29.8	27.3
87.5°	15.0	15.0	15.0	15.0	15.0	15.0	12.5	12.5	12.5	12.5	12.5
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0



TEST NUMBER: P584301

CATALOG NUMBER: HCC8W30D010BZ-HM82555840-81WWW

**CANDELA DISTRIBUTION (continued):**

	50°	55°	60°	65°	67.5°	70°	75°	80°	85°	90°	95°
0°	1835.6	1835.6	1835.6	1835.6	1835.6	1835.6	1835.6	1835.6	1835.6	1835.6	1835.6
2.5°	1855.4	1850.4	1848.1	1845.6	1845.6	1843.1	1840.6	1835.6	1835.6	1830.6	1828.1
5°	1865.4	1857.9	1852.9	1848.1	1845.6	1840.6	1835.6	1828.1	1825.6	1818.1	1810.6
7.5°	1867.9	1855.4	1850.4	1840.6	1835.6	1830.6	1820.6	1813.1	1803.1	1795.7	1785.8
10°	1857.9	1848.1	1835.6	1823.1	1820.6	1813.1	1798.2	1788.3	1775.8	1765.8	1750.9
12.5°	1843.1	1828.1	1815.6	1800.7	1793.2	1785.8	1770.8	1755.8	1738.4	1721.0	1706.1
15°	1818.1	1800.7	1783.3	1765.8	1755.8	1748.4	1730.9	1713.5	1696.1	1673.6	1658.8
17.5°	1780.8	1760.8	1743.4	1721.0	1711.0	1703.6	1681.1	1661.3	1638.8	1616.3	1601.5
20°	1733.4	1708.6	1688.6	1663.6	1656.3	1643.8	1621.3	1599.0	1574.0	1549.1	1531.7
22.5°	1671.1	1646.3	1623.8	1599.0	1586.5	1574.0	1551.6	1524.2	1499.3	1479.4	1462.0
25°	1599.0	1576.5	1549.1	1526.7	1511.8	1496.8	1472.0	1449.5	1427.2	1397.2	1379.8
27.5°	1519.3	1491.8	1472.0	1442.0	1427.2	1417.2	1389.7	1359.9	1339.9	1312.5	1292.6
30°	1429.5	1404.7	1382.2	1352.4	1337.4	1327.5	1302.5	1275.2	1255.2	1227.9	1207.9
32.5°	1334.9	1307.5	1280.2	1260.2	1242.7	1232.9	1205.4	1188.0	1163.1	1140.7	1118.3
35°	1232.9	1205.4	1185.6	1158.1	1148.1	1138.2	1115.8	1093.4	1070.9	1051.1	1033.6
37.5°	1123.2	1103.3	1080.9	1060.9	1053.5	1043.6	1016.1	996.3	978.8	958.9	943.9
40°	1016.1	998.8	983.8	963.8	951.4	943.9	924.0	906.6	886.6	874.2	859.3
42.5°	919.0	899.1	884.1	869.2	856.8	849.3	831.8	819.3	804.5	792.0	774.5
45°	817.0	807.0	789.5	777.0	769.6	759.7	747.2	732.2	719.8	709.8	697.3
47.5°	727.2	717.3	704.8	689.9	684.9	677.5	665.0	655.0	645.0	635.0	622.7
50°	645.0	632.5	622.7	612.7	607.7	600.2	587.7	582.8	575.4	565.4	557.9
52.5°	570.4	560.4	550.4	538.0	535.5	530.5	523.0	513.1	505.6	500.6	495.6
55°	503.1	493.1	485.7	475.7	473.2	468.2	458.2	453.2	448.3	443.4	438.4
57.5°	443.4	433.4	423.4	418.4	413.4	408.4	405.9	398.4	393.6	391.1	386.1
60°	388.6	378.6	371.1	363.6	361.1	358.6	353.6	348.7	343.7	338.7	336.2
62.5°	336.2	326.3	321.3	316.3	311.3	311.3	306.3	301.4	296.4	293.9	288.9
65°	288.9	283.9	276.4	269.0	266.5	266.5	259.0	256.6	254.1	249.1	244.1
67.5°	244.1	239.1	231.6	229.1	226.6	224.1	221.6	216.6	211.6	209.3	204.3
70°	204.3	199.3	194.3	191.8	189.3	186.8	181.8	179.3	174.3	171.8	169.3
72.5°	164.3	161.9	156.9	154.5	152.0	149.5	147.0	144.5	139.5	137.0	134.5
75°	132.0	129.5	124.5	122.0	119.5	119.5	117.0	112.1	109.6	109.6	107.1
77.5°	99.6	97.1	94.6	92.1	89.7	89.7	87.2	84.7	82.2	82.2	79.7
80°	72.2	69.8	67.3	67.3	67.3	64.8	62.3	62.3	59.8	59.8	57.3
82.5°	47.3	47.3	44.8	44.8	44.8	42.3	42.3	39.8	39.8	39.8	39.8
85°	27.3	27.3	27.3	24.9	24.9	24.9	24.9	24.9	24.9	22.5	24.9
87.5°	12.5	12.5	12.5	12.5	12.5	12.5	12.5	12.5	10.0	10.0	10.0
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Cooper Lighting Solutions Photometric Lab  
 1121 Highway 74 South  
 Peachtree City, GA 30269



TEST NUMBER: P584301

CATALOG NUMBER: HCC8W30D010BZ-HM82555840-81WWW

**CANDELA DISTRIBUTION (continued):**

	100°	105°	110°	112.5°	115°	120°	125°	130°	135°	140°	145°
0°	1835.6	1835.6	1835.6	1835.6	1835.6	1835.6	1835.6	1835.6	1835.6	1835.6	1835.6
2.5°	1825.6	1823.1	1818.1	1818.1	1813.1	1813.1	1810.6	1808.1	1805.6	1803.1	1800.7
5°	1808.1	1798.2	1793.2	1790.8	1785.8	1783.3	1775.8	1770.8	1768.3	1763.3	1758.3
7.5°	1775.8	1765.8	1755.8	1753.4	1750.9	1740.9	1733.4	1726.0	1721.0	1716.0	1711.0
10°	1738.4	1728.4	1716.0	1711.0	1706.1	1693.6	1683.6	1676.1	1666.1	1656.3	1653.8
12.5°	1693.6	1678.6	1663.6	1658.8	1651.3	1638.8	1628.8	1616.3	1609.0	1596.5	1594.0
15°	1641.3	1623.8	1611.5	1599.0	1594.0	1581.5	1564.1	1554.1	1539.2	1534.2	1521.7
17.5°	1579.0	1561.6	1544.2	1539.2	1531.7	1514.3	1496.8	1484.3	1469.5	1462.0	1454.5
20°	1514.3	1491.8	1474.5	1469.5	1459.5	1444.5	1427.2	1414.7	1402.2	1387.2	1379.8
22.5°	1439.5	1414.7	1399.7	1387.2	1384.7	1367.4	1347.4	1337.4	1327.5	1315.0	1305.0
25°	1357.4	1334.9	1317.5	1307.5	1302.5	1287.6	1272.7	1260.2	1245.2	1237.9	1225.4
27.5°	1272.7	1257.7	1235.4	1225.4	1217.9	1205.4	1188.0	1180.6	1165.6	1155.6	1148.1
30°	1190.5	1168.1	1155.6	1143.2	1135.7	1123.2	1108.3	1100.8	1088.4	1078.4	1070.9
32.5°	1100.8	1085.9	1068.4	1063.4	1053.5	1041.1	1031.1	1018.6	1008.6	998.8	996.3
35°	1018.6	998.8	981.3	976.3	968.8	956.4	951.4	943.9	931.5	929.0	919.0
37.5°	929.0	919.0	899.1	891.6	889.1	879.1	869.2	864.3	856.8	849.3	846.8
40°	844.3	831.8	821.8	814.5	809.5	802.0	792.0	789.5	784.5	774.5	772.1
42.5°	764.6	752.2	742.2	739.7	732.2	724.8	719.8	712.3	709.8	707.3	702.3
45°	687.4	679.9	670.0	667.5	665.0	655.0	650.0	645.0	640.0	637.5	632.5
47.5°	617.7	610.2	602.7	600.2	595.2	592.7	585.2	582.8	575.4	572.9	570.4
50°	550.4	545.4	540.4	538.0	533.0	530.5	525.5	520.5	515.6	513.1	510.6
52.5°	490.7	485.7	480.7	478.2	475.7	470.7	465.7	460.7	458.2	455.7	453.2
55°	433.4	428.4	425.9	423.4	420.9	418.4	410.9	408.4	405.9	403.4	398.4
57.5°	381.1	376.1	371.1	371.1	368.6	366.1	361.1	356.1	356.1	351.1	346.2
60°	333.8	328.8	323.8	321.3	318.8	313.8	311.3	308.8	306.3	303.9	298.9
62.5°	283.9	281.4	276.4	276.4	271.4	269.0	266.5	264.0	261.5	256.6	254.1
65°	241.6	239.1	234.1	231.6	231.6	229.1	224.1	221.6	219.1	219.1	216.6
67.5°	201.8	199.3	194.3	191.8	191.8	189.3	186.8	186.8	184.3	181.8	184.3
70°	166.8	161.9	161.9	159.4	159.4	156.9	154.5	154.5	154.5	156.9	156.9
72.5°	132.0	129.5	127.0	127.0	127.0	127.0	124.5	124.5	127.0	129.5	129.5
75°	104.6	102.1	102.1	102.1	99.6	99.6	102.1	102.1	104.6	104.6	104.6
77.5°	77.2	77.2	77.2	77.2	77.2	77.2	79.7	79.7	82.2	82.2	82.2
80°	57.3	57.3	57.3	57.3	57.3	59.8	59.8	59.8	59.8	59.8	62.3
82.5°	39.8	39.8	39.8	39.8	39.8	39.8	39.8	42.3	42.3	42.3	42.3
85°	22.5	24.9	24.9	24.9	24.9	24.9	24.9	24.9	24.9	24.9	24.9
87.5°	10.0	10.0	10.0	10.0	10.0	10.0	10.0	10.0	10.0	10.0	10.0
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0





TEST NUMBER: P584301

CATALOG NUMBER: HCC8W30D010BZ-HM82555840-81WWW

**CANDELA DISTRIBUTION (continued):**

	150°	155°	157.5°	160°	165°	170°	175°	180°
0°	1835.6	1835.6	1835.6	1835.6	1835.6	1835.6	1835.6	1835.6
2.5°	1798.2	1798.2	1798.2	1800.7	1795.7	1795.7	1795.7	1795.7
5°	1755.8	1753.4	1750.9	1753.4	1748.4	1748.4	1745.9	1745.9
7.5°	1703.6	1701.1	1698.6	1698.6	1693.6	1693.6	1691.1	1688.6
10°	1646.3	1641.3	1643.8	1638.8	1636.3	1633.8	1631.3	1628.8
12.5°	1584.0	1579.0	1576.5	1571.5	1566.6	1564.1	1566.6	1561.6
15°	1516.8	1509.3	1506.8	1501.8	1496.8	1494.3	1494.3	1491.8
17.5°	1442.0	1437.0	1434.5	1429.5	1427.2	1422.2	1419.7	1417.2
20°	1372.3	1359.9	1362.4	1357.4	1354.9	1344.9	1344.9	1347.4
22.5°	1295.1	1287.6	1282.7	1277.7	1275.2	1270.2	1270.2	1267.7
25°	1217.9	1210.4	1207.9	1202.9	1200.4	1195.4	1193.0	1193.0
27.5°	1143.2	1133.2	1133.2	1128.2	1123.2	1120.8	1118.3	1115.8
30°	1063.4	1056.0	1053.5	1053.5	1051.1	1051.1	1043.6	1046.1
32.5°	988.8	983.8	981.3	976.3	976.3	973.8	973.8	966.3
35°	914.0	906.6	909.1	904.1	901.6	899.1	901.6	899.1
37.5°	841.8	836.8	836.8	831.8	831.8	829.3	826.8	831.8
40°	769.6	767.1	764.6	762.1	764.6	762.1	757.2	759.7
42.5°	697.3	697.3	694.9	694.9	692.4	692.4	692.4	692.4
45°	632.5	630.2	630.2	627.7	627.7	627.7	627.7	625.2
47.5°	567.9	565.4	565.4	565.4	562.9	562.9	560.4	562.9
50°	505.6	505.6	503.1	503.1	505.6	503.1	500.6	500.6
52.5°	448.3	448.3	445.8	445.8	443.4	440.9	443.4	443.4
55°	396.1	393.6	391.1	391.1	388.6	386.1	386.1	388.6
57.5°	346.2	343.7	341.2	341.2	336.2	333.8	333.8	333.8
60°	298.9	293.9	293.9	291.4	291.4	288.9	288.9	288.9
62.5°	254.1	251.6	251.6	251.6	251.6	249.1	249.1	249.1
65°	216.6	216.6	216.6	219.1	219.1	221.6	221.6	221.6
67.5°	186.8	189.3	189.3	189.3	191.8	191.8	191.8	189.3
70°	159.4	159.4	159.4	161.9	161.9	161.9	161.9	161.9
72.5°	132.0	132.0	132.0	132.0	132.0	132.0	132.0	132.0
75°	104.6	107.1	107.1	107.1	104.6	107.1	107.1	104.6
77.5°	82.2	82.2	82.2	82.2	82.2	82.2	82.2	82.2
80°	62.3	62.3	62.3	62.3	62.3	62.3	62.3	62.3
82.5°	42.3	42.3	42.3	42.3	42.3	42.3	42.3	42.3
85°	24.9	24.9	24.9	24.9	24.9	24.9	24.9	24.9
87.5°	10.0	10.0	10.0	10.0	10.0	10.0	10.0	10.0
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Classified  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Classified  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Classified  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°    - - 45°-225°    - - - - 90°-270°

Classified  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Classified  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Classified  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Classified  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report





Classified  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Classified  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)