

Classified  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269



Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: HALO COMMERCIAL

Report Number: P584310

Luminaire Tested: **HCC8S30D010BZ-HM82555927-81RWWC**

Issue Date: 10/21/2021

**Test Information**

Test Method: LM-41-14  
Report Number: P584310  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2109-368-14)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 10/21/2021  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: HALO COMMERCIAL  
Catalog Number: HCC8S30D010BZ-HM82555927-81RWWC  
Description: HALO COMMERCIAL 8" ROUND, NEW CONSTRUCTION FRAME, WITH 8" WALLWASH DISTRIBUTION, SPECULAR TRIM  
Light Source: (1) HIGH LUMEN LED 90CRI / 2700K CCT  
CYLINDER  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**


Lumens per Lamp: N/A  
Luminaire Lumens: 2551.0 lumens  
Efficiency: N/A  
Efficacy: 91.1 lumens/watt  
Spacing Criteria (0/90/45): 1.15 / 1.08 / 1.17  
Luminous Opening: Circular (Dia: 0.67' x H: 0')  
CIE Type: Direct

Input Watts (W): 28  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P584310  
CATALOG NUMBER: HCC8S30D010BZ-HM82555927-81RWWC

### Luminous Intensity Polar Plot

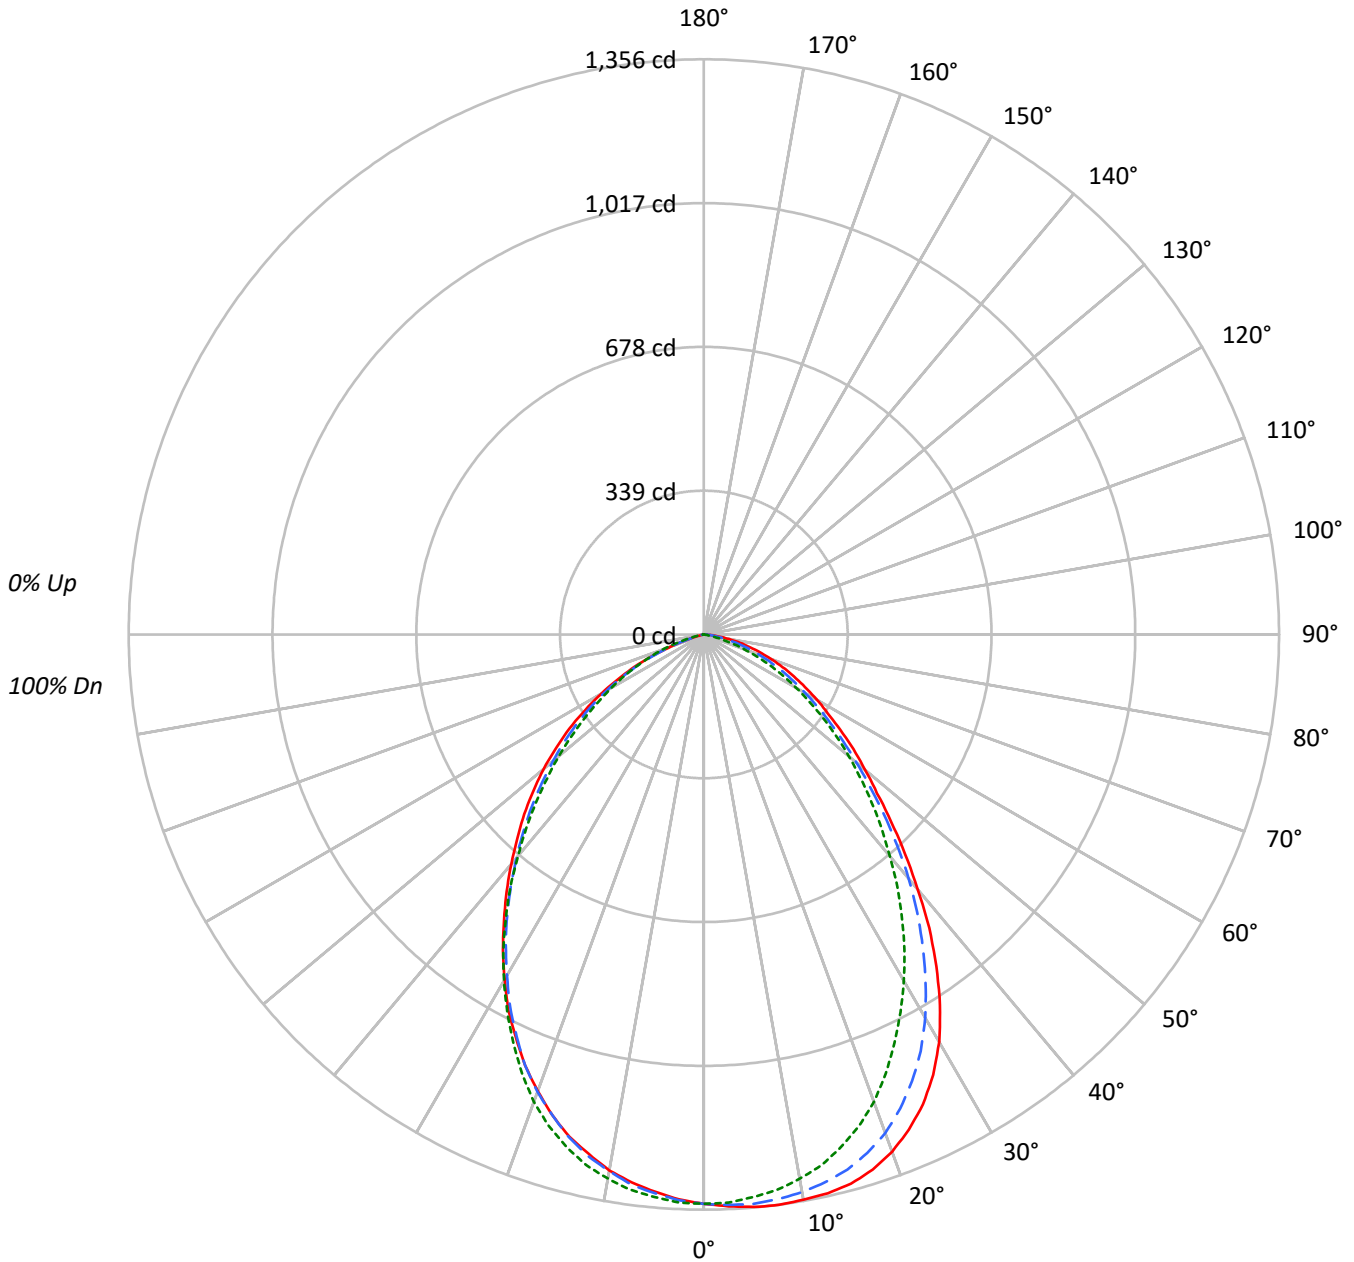

Cooper Lighting Solutions Photometric Lab  
 1121 Highway 74 South  
 Peachtree City, GA 30269



TEST NUMBER: P584310

CATALOG NUMBER: HCC8S30D010BZ-HM82555927-81RWWC

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20					20					20					20					20					
RC	80					70					50					30					10					0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0		
RCR																										
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100					100			
1	111	107	104	101	108	105	102	99	101	98	96	97	95	93	93	92	90	88					88			
2	103	96	90	85	100	94	89	84	91	86	82	87	84	81	84	82	79	77					77			
3	95	86	79	73	93	84	78	73	82	76	72	79	74	70	76	73	69	67					67			
4	88	77	70	64	86	76	69	64	74	68	63	72	66	62	69	65	61	59					59			
5	81	70	62	56	80	69	62	56	67	61	56	65	59	55	63	58	54	52					52			
6	76	64	56	50	74	63	55	50	61	55	50	60	54	49	58	53	49	47					47			
7	71	59	51	45	69	58	50	45	56	50	45	55	49	44	54	48	44	42					42			
8	66	54	46	41	65	53	46	41	52	45	40	51	45	40	50	44	40	38					38			
9	62	50	42	37	61	49	42	37	48	42	37	47	41	37	46	41	37	35					35			
10	58	46	39	34	57	46	39	34	45	38	34	44	38	34	43	38	34	32					32			

**AVERAGE LUMINANCE (cd/sqm):**

	0°	90°	180°
0°	41392	41392	41392
5°	41934	41212	40828
10°	42365	40793	40173
15°	42794	39931	39129
20°	42575	38460	37577
25°	41584	36157	35667
30°	39495	33563	33438
35°	35954	30627	30898
40°	31523	27409	28419
45°	27195	24382	26100
50°	23814	21405	23641
55°	21101	18403	20811
60°	19008	15474	17237
65°	17125	12426	13207
70°	15030	9052	7267
75°	12808	4706	1930
80°	9856	1261	320
85°	6369	0	0



TEST NUMBER: P584310  
 CATALOG NUMBER: HCC8S30D010BZ-HM82555927-81RWWC

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	126.6	5.0
10°-20°	356.0	14.0
20°-30°	505.3	19.8
30°-40°	531.9	20.9
40°-50°	452.5	17.7
50°-60°	327.0	12.8
60°-70°	186.0	7.3
70°-80°	58.6	2.3
80°-90°	7.1	0.3
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	987.9	38.7
0°-40°	1519.8	59.6
0°-60°	2299.3	90.1
0°-90°	2551.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	2551.0	100.0

**CANDELA DISTRIBUTION:**

	0°	45°	90°	135°	180°	Flux
0°	1342	1342	1342	1342	1342	
5°	1355	1348	1331	1322	1319	129
15°	1340	1306	1251	1228	1226	377
25°	1222	1161	1063	1045	1048	560
35°	955	900	814	808	821	594
45°	624	600	559	574	598	485
55°	392	364	342	362	387	354
65°	235	202	170	168	181	233
75°	108	82	40	18	16	116
85°	18	11	0	0	0	23
90°	0	0	0	0	0	

Cooper Lighting Solutions Photometric Lab  
 1121 Highway 74 South  
 Peachtree City, GA 30269



TEST NUMBER: P584310

CATALOG NUMBER: HCC8S30D010BZ-HM82555927-81RWWC

**CANDELA DISTRIBUTION (FULL):**

	0°	5°	10°	15°	20°	22.5°	25°	30°	35°	40°	45°
0°	1342.3	1342.3	1342.3	1342.3	1342.3	1342.3	1342.3	1342.3	1342.3	1342.3	1342.3
2.5°	1349.4	1351.2	1347.6	1347.6	1351.2	1347.6	1349.4	1349.4	1347.6	1347.6	1345.8
5°	1354.7	1353.0	1353.0	1353.0	1354.7	1351.2	1349.4	1351.2	1347.6	1347.6	1347.6
7.5°	1356.5	1356.5	1354.7	1353.0	1353.0	1353.0	1351.2	1349.4	1347.6	1344.0	1342.3
10°	1353.0	1353.0	1354.7	1351.2	1351.2	1347.6	1347.6	1344.0	1344.0	1340.5	1335.0
12.5°	1349.4	1347.6	1347.6	1344.0	1344.0	1340.5	1340.5	1335.0	1333.2	1327.9	1322.5
15°	1340.5	1338.7	1335.0	1333.2	1331.4	1329.7	1326.1	1324.3	1319.0	1311.8	1306.4
17.5°	1322.5	1320.7	1319.0	1315.4	1311.8	1309.9	1308.1	1302.8	1295.7	1290.3	1281.3
20°	1297.4	1295.7	1295.7	1290.3	1288.5	1283.0	1281.3	1274.1	1268.8	1258.0	1250.8
22.5°	1263.4	1265.2	1261.6	1258.0	1254.4	1249.0	1245.5	1238.3	1229.3	1218.6	1209.6
25°	1222.2	1224.0	1220.4	1216.8	1211.5	1207.8	1204.2	1193.5	1184.5	1172.0	1161.3
27.5°	1170.2	1170.2	1170.2	1166.6	1157.6	1155.8	1152.3	1141.6	1129.0	1118.3	1107.4
30°	1109.2	1107.4	1107.4	1102.1	1098.5	1091.4	1086.0	1077.0	1068.1	1055.5	1043.0
32.5°	1035.9	1037.6	1032.2	1028.6	1023.3	1023.3	1016.1	1008.9	998.2	985.6	973.1
35°	955.1	956.9	953.3	951.6	942.6	940.9	939.1	930.0	922.9	914.0	899.6
37.5°	872.7	870.9	869.2	869.2	863.8	860.1	856.6	851.2	840.5	833.3	826.1
40°	783.1	783.1	783.1	781.3	779.5	775.9	774.2	770.6	763.5	756.2	750.9
42.5°	702.5	702.5	700.7	698.9	695.3	697.1	693.5	690.0	682.7	677.4	673.8
45°	623.6	623.6	623.6	625.4	621.8	616.5	616.5	612.9	609.2	605.7	600.3
47.5°	553.7	559.1	555.5	553.7	555.5	548.4	548.4	544.8	541.2	537.7	530.4
50°	496.4	496.4	496.4	492.8	491.1	491.1	485.6	482.0	480.2	476.7	469.5
52.5°	444.4	440.9	440.9	439.1	437.3	433.6	433.6	430.1	422.9	419.4	414.0
55°	392.5	392.5	390.7	388.9	387.1	385.2	383.5	378.1	374.5	369.2	363.8
57.5°	345.9	349.4	347.7	344.1	340.5	340.5	337.0	333.3	327.9	322.6	317.2
60°	308.2	306.4	306.4	304.6	301.1	299.3	297.5	292.1	286.7	281.3	276.0
62.5°	268.8	268.8	268.8	265.3	261.6	259.8	258.0	254.4	247.3	242.0	238.4
65°	234.7	232.9	231.1	229.4	227.6	224.0	222.2	218.7	213.3	207.8	202.5
67.5°	200.7	198.9	198.9	197.1	191.8	190.0	190.0	184.5	179.2	173.8	168.5
70°	166.7	166.7	166.7	163.1	161.2	159.4	157.7	154.1	148.7	143.4	138.0
72.5°	138.0	136.1	136.1	134.4	129.0	127.2	125.4	121.9	116.5	113.0	109.3
75°	107.5	107.5	105.7	103.9	102.1	100.4	98.6	95.0	89.7	84.2	82.4
77.5°	82.4	80.6	80.6	78.8	75.3	73.5	73.5	69.9	64.6	60.9	57.3
80°	55.5	57.3	55.5	53.7	52.0	50.2	48.4	46.6	43.0	39.5	35.8
82.5°	34.0	35.8	34.0	34.0	32.2	30.4	30.4	26.9	25.1	23.3	21.5
85°	18.0	18.0	18.0	18.0	16.2	16.2	16.2	14.4	12.6	10.7	10.7
87.5°	5.4	7.1	5.4	5.4	5.4	5.4	5.4	5.4	3.6	3.6	3.6
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Cooper Lighting Solutions Photometric Lab  
 1121 Highway 74 South  
 Peachtree City, GA 30269



TEST NUMBER: P584310

CATALOG NUMBER: HCC8S30D010BZ-HM82555927-81RWWC

**CANDELA DISTRIBUTION (continued):**

	50°	55°	60°	65°	67.5°	70°	75°	80°	85°	90°	95°
0°	1342.3	1342.3	1342.3	1342.3	1342.3	1342.3	1342.3	1342.3	1342.3	1342.3	1342.3
2.5°	1347.6	1345.8	1344.0	1344.0	1344.0	1344.0	1344.0	1342.3	1340.5	1340.5	1340.5
5°	1344.0	1344.0	1344.0	1342.3	1340.5	1340.5	1336.9	1335.0	1333.2	1331.4	1329.7
7.5°	1340.5	1336.9	1335.0	1333.2	1331.4	1331.4	1327.9	1324.3	1324.3	1320.7	1317.2
10°	1329.7	1327.9	1324.3	1320.7	1319.0	1317.2	1313.6	1308.1	1306.4	1302.8	1299.2
12.5°	1317.2	1313.6	1309.9	1302.8	1301.0	1299.2	1292.1	1286.7	1283.0	1281.3	1272.3
15°	1301.0	1293.9	1288.5	1279.5	1277.7	1274.1	1268.8	1263.4	1256.2	1250.8	1247.3
17.5°	1272.3	1265.2	1256.2	1247.3	1243.7	1243.7	1234.7	1227.5	1218.6	1215.0	1207.8
20°	1238.3	1229.3	1222.2	1211.5	1206.0	1200.7	1195.3	1184.5	1177.3	1172.0	1163.1
22.5°	1198.9	1186.4	1177.3	1166.6	1157.6	1152.3	1143.3	1134.3	1125.4	1120.0	1112.9
25°	1148.7	1138.0	1123.6	1112.9	1107.4	1100.3	1089.6	1080.6	1071.6	1062.7	1059.0
27.5°	1093.2	1078.8	1066.3	1053.7	1048.3	1043.0	1030.4	1019.7	1012.6	1003.5	999.9
30°	1032.2	1017.9	1003.5	992.8	987.5	978.4	971.3	958.7	949.8	942.6	933.6
32.5°	962.4	951.6	939.1	922.9	919.3	912.2	901.4	896.0	885.2	879.9	872.7
35°	887.1	879.9	867.4	854.8	849.4	845.9	836.9	826.1	819.0	813.6	809.9
37.5°	815.4	806.4	793.9	784.9	781.3	775.9	765.2	759.8	752.6	749.1	741.9
40°	738.4	729.3	720.4	715.1	709.6	706.0	698.9	693.5	686.4	680.9	679.2
42.5°	663.1	657.6	650.5	643.4	641.6	636.1	632.5	627.2	621.8	620.1	614.7
45°	595.0	589.6	582.4	575.2	573.5	569.9	568.1	562.8	559.1	559.1	559.1
47.5°	526.8	521.5	514.4	510.7	512.6	505.3	505.3	503.5	500.0	500.0	501.8
50°	466.0	458.7	456.9	453.4	449.8	446.2	448.0	442.7	442.7	446.2	444.4
52.5°	408.5	401.4	399.6	396.1	394.3	394.3	392.5	392.5	390.7	392.5	392.5
55°	356.6	351.2	347.7	344.1	342.3	342.3	342.3	340.5	338.7	342.3	344.1
57.5°	310.0	308.2	304.6	299.3	297.5	295.7	293.9	293.9	293.9	293.9	295.7
60°	268.8	265.3	261.6	256.2	256.2	254.4	252.7	250.9	250.9	250.9	250.9
62.5°	232.9	227.6	222.2	218.7	216.9	215.1	213.3	209.6	209.6	209.6	209.6
65°	197.1	191.8	188.2	184.5	181.0	181.0	177.4	175.6	172.0	170.3	166.7
67.5°	163.1	159.4	155.9	150.5	148.7	147.0	143.4	141.6	136.1	134.4	132.6
70°	132.6	127.2	123.7	120.1	118.3	114.7	111.1	107.5	103.9	100.4	96.8
72.5°	103.9	98.6	95.0	91.4	87.9	87.9	82.4	78.8	73.5	69.9	64.6
75°	77.0	71.7	68.1	62.8	60.9	59.1	53.7	50.2	44.8	39.5	35.8
77.5°	52.0	48.4	44.8	39.5	35.8	35.8	30.4	26.9	23.3	18.0	16.2
80°	32.2	28.7	25.1	21.5	21.5	18.0	16.2	12.6	8.9	7.1	5.4
82.5°	18.0	16.2	14.4	10.7	10.7	8.9	7.1	5.4	3.6	1.8	1.8
85°	8.9	7.1	5.4	5.4	3.6	3.6	3.6	1.8	1.8	0.0	0.0
87.5°	3.6	1.8	1.8	1.8	1.8	1.8	0.0	0.0	0.0	0.0	0.0
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Cooper Lighting Solutions Photometric Lab  
 1121 Highway 74 South  
 Peachtree City, GA 30269



TEST NUMBER: P584310

CATALOG NUMBER: HCC8S30D010BZ-HM82555927-81RWWC

**CANDELA DISTRIBUTION (continued):**

	100°	105°	110°	112.5°	115°	120°	125°	130°	135°	140°	145°
0°	1342.3	1342.3	1342.3	1342.3	1342.3	1342.3	1342.3	1342.3	1342.3	1342.3	1342.3
2.5°	1338.7	1338.7	1336.9	1336.9	1336.9	1335.0	1336.9	1335.0	1335.0	1335.0	1336.9
5°	1331.4	1327.9	1327.9	1326.1	1326.1	1324.3	1326.1	1324.3	1322.5	1320.7	1322.5
7.5°	1317.2	1313.6	1311.8	1309.9	1309.9	1309.9	1308.1	1306.4	1308.1	1302.8	1306.4
10°	1297.4	1295.7	1292.1	1290.3	1288.5	1290.3	1288.5	1284.8	1284.8	1284.8	1283.0
12.5°	1272.3	1268.8	1267.0	1265.2	1261.6	1261.6	1263.4	1259.7	1259.7	1256.2	1256.2
15°	1241.9	1238.3	1234.7	1234.7	1231.1	1231.1	1229.3	1229.3	1227.5	1225.7	1225.7
17.5°	1204.2	1198.9	1195.3	1197.1	1195.3	1193.5	1193.5	1190.0	1188.2	1190.0	1190.0
20°	1159.4	1155.8	1152.3	1154.0	1150.5	1148.7	1150.5	1145.1	1146.9	1146.9	1146.9
22.5°	1109.2	1107.4	1102.1	1102.1	1098.5	1096.7	1098.5	1098.5	1100.3	1098.5	1098.5
25°	1053.7	1050.1	1046.6	1046.6	1044.8	1043.0	1044.8	1046.6	1044.8	1046.6	1046.6
27.5°	994.6	989.2	989.2	985.6	985.6	987.5	985.6	987.5	989.2	989.2	992.8
30°	930.0	928.3	926.5	924.7	924.7	926.5	926.5	926.5	928.3	931.8	931.8
32.5°	869.2	865.6	862.0	862.0	865.6	863.8	865.6	865.6	869.2	869.2	872.7
35°	802.8	802.8	799.2	801.0	801.0	801.0	801.0	804.6	808.2	809.9	813.6
37.5°	741.9	736.6	738.4	738.4	740.2	738.4	743.7	743.7	747.3	747.3	750.9
40°	675.6	675.6	677.4	675.6	677.4	677.4	680.9	684.5	686.4	690.0	691.8
42.5°	612.9	616.5	612.9	614.7	616.5	618.3	620.1	621.8	629.0	632.5	638.0
45°	555.5	557.3	559.1	560.9	559.1	562.8	564.5	568.1	573.5	575.2	577.0
47.5°	500.0	501.8	503.5	505.3	505.3	508.9	510.7	514.4	517.9	519.7	521.5
50°	446.2	449.8	451.6	451.6	453.4	456.9	460.5	460.5	464.2	469.5	471.3
52.5°	397.8	397.8	401.4	403.2	405.0	405.0	410.3	412.2	414.0	417.6	421.1
55°	344.1	349.4	351.2	351.2	354.8	358.4	360.1	362.1	362.1	369.2	369.2
57.5°	297.5	299.3	302.8	302.8	302.8	308.2	308.2	311.8	313.7	315.4	319.0
60°	250.9	254.4	254.4	256.2	254.4	258.0	259.8	263.5	265.3	267.0	268.8
62.5°	207.8	207.8	209.6	209.6	209.6	209.6	213.3	213.3	216.9	218.7	220.4
65°	166.7	166.7	166.7	166.7	166.7	166.7	166.7	166.7	168.5	168.5	172.0
67.5°	129.0	127.2	123.7	125.4	123.7	123.7	121.9	121.9	123.7	123.7	127.2
70°	93.2	91.4	87.9	87.9	86.0	84.2	82.4	80.6	78.8	78.8	78.8
72.5°	60.9	57.3	52.0	50.2	50.2	46.6	43.0	41.3	41.3	41.3	41.3
75°	30.4	26.9	23.3	21.5	21.5	18.0	19.7	18.0	18.0	18.0	18.0
77.5°	12.6	8.9	7.1	7.1	7.1	5.4	5.4	5.4	5.4	5.4	5.4
80°	3.6	1.8	1.8	1.8	1.8	1.8	1.8	1.8	1.8	1.8	1.8
82.5°	1.8	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
85°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
87.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0



Cooper Lighting Solutions Photometric Lab  
 1121 Highway 74 South  
 Peachtree City, GA 30269



TEST NUMBER: P584310

CATALOG NUMBER: HCC8S30D010BZ-HM82555927-81RWWC

**CANDELA DISTRIBUTION (continued):**

	150°	155°	157.5°	160°	165°	170°	175°	180°
0°	1342.3	1342.3	1342.3	1342.3	1342.3	1342.3	1342.3	1342.3
2.5°	1335.0	1335.0	1331.4	1333.2	1333.2	1333.2	1333.2	1333.2
5°	1319.0	1320.7	1319.0	1320.7	1320.7	1319.0	1319.0	1319.0
7.5°	1302.8	1304.6	1302.8	1304.6	1304.6	1304.6	1302.8	1302.8
10°	1283.0	1283.0	1283.0	1283.0	1283.0	1281.3	1283.0	1283.0
12.5°	1256.2	1256.2	1256.2	1258.0	1258.0	1256.2	1256.2	1254.4
15°	1227.5	1224.0	1225.7	1227.5	1225.7	1225.7	1225.7	1225.7
17.5°	1188.2	1190.0	1188.2	1188.2	1188.2	1188.2	1190.0	1188.2
20°	1146.9	1146.9	1148.7	1146.9	1146.9	1146.9	1146.9	1145.1
22.5°	1100.3	1098.5	1098.5	1100.3	1100.3	1098.5	1100.3	1100.3
25°	1048.3	1050.1	1048.3	1048.3	1050.1	1050.1	1050.1	1048.3
27.5°	992.8	994.6	996.4	994.6	994.6	994.6	996.4	998.2
30°	935.4	939.1	935.4	935.4	939.1	937.3	939.1	939.1
32.5°	874.5	879.9	876.3	879.9	879.9	881.6	879.9	881.6
35°	813.6	819.0	819.0	819.0	820.8	822.6	822.6	820.8
37.5°	756.2	758.0	758.0	761.7	763.5	765.2	765.2	763.5
40°	697.1	700.7	702.5	702.5	702.5	706.0	709.6	706.0
42.5°	639.8	641.6	643.4	643.4	646.9	648.7	650.5	650.5
45°	584.2	587.8	589.6	591.4	593.2	596.8	595.0	598.5
47.5°	526.8	532.2	534.0	535.8	539.4	541.2	543.0	544.8
50°	474.9	478.5	478.5	482.0	487.5	487.5	491.1	492.8
52.5°	422.9	424.7	426.5	428.3	431.8	435.4	435.4	439.1
55°	372.8	374.5	374.5	376.3	378.1	385.2	387.1	387.1
57.5°	320.8	320.8	324.4	326.1	327.9	331.5	331.5	331.5
60°	270.6	272.4	272.4	274.2	276.0	279.5	281.3	279.5
62.5°	220.4	222.2	222.2	224.0	227.6	229.4	227.6	227.6
65°	173.8	175.6	175.6	177.4	181.0	181.0	179.2	181.0
67.5°	127.2	127.2	127.2	127.2	127.2	127.2	127.2	127.2
70°	80.6	78.8	77.0	78.8	78.8	78.8	77.0	80.6
72.5°	39.5	41.3	41.3	41.3	41.3	41.3	41.3	39.5
75°	18.0	18.0	16.2	16.2	16.2	18.0	18.0	16.2
77.5°	5.4	5.4	5.4	5.4	5.4	5.4	5.4	5.4
80°	1.8	1.8	1.8	1.8	1.8	1.8	1.8	1.8
82.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
85°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
87.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Classified  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Classified  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Classified  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°    - - 45°-225°    - - - - 90°-270°

Classified  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Classified  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Classified  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Classified  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report





Classified  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Classified  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)