

Classified  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269



Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: HALO COMMERCIAL

Report Number: P584318

Luminaire Tested: **HCC8S30D010MB-HM82555927-81WWW**

Issue Date: 10/21/2021

**Test Information**

Test Method: LM-41-14  
Report Number: P584318  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2109-368-16)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 10/21/2021  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: HALO COMMERCIAL  
Catalog Number: HCC8S30D010MB-HM82555927-81WWW  
Description: HALO COMMERCIAL 8" ROUND, NEW CONSTRUCTION FRAME, WITH 8" WALLWASH DISTRIBUTION, WHITE TRIM  
Light Source: (1) HIGH LUMEN LED 90CRI / 2700K CCT  
CYLINDER  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**


Lumens per Lamp: N/A  
Luminaire Lumens: 2436.3 lumens  
Efficiency: N/A  
Efficacy: 87.0 lumens/watt  
Spacing Criteria (0/90/45): 1.09 / 1.04 / 1.13  
Luminous Opening: Circular (Dia: 0.67' x H: 0')  
CIE Type: Direct

Input Watts (W): 28  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P584318  
CATALOG NUMBER: HCC8S30D010MB-HM82555927-81WWW

### Luminous Intensity Polar Plot

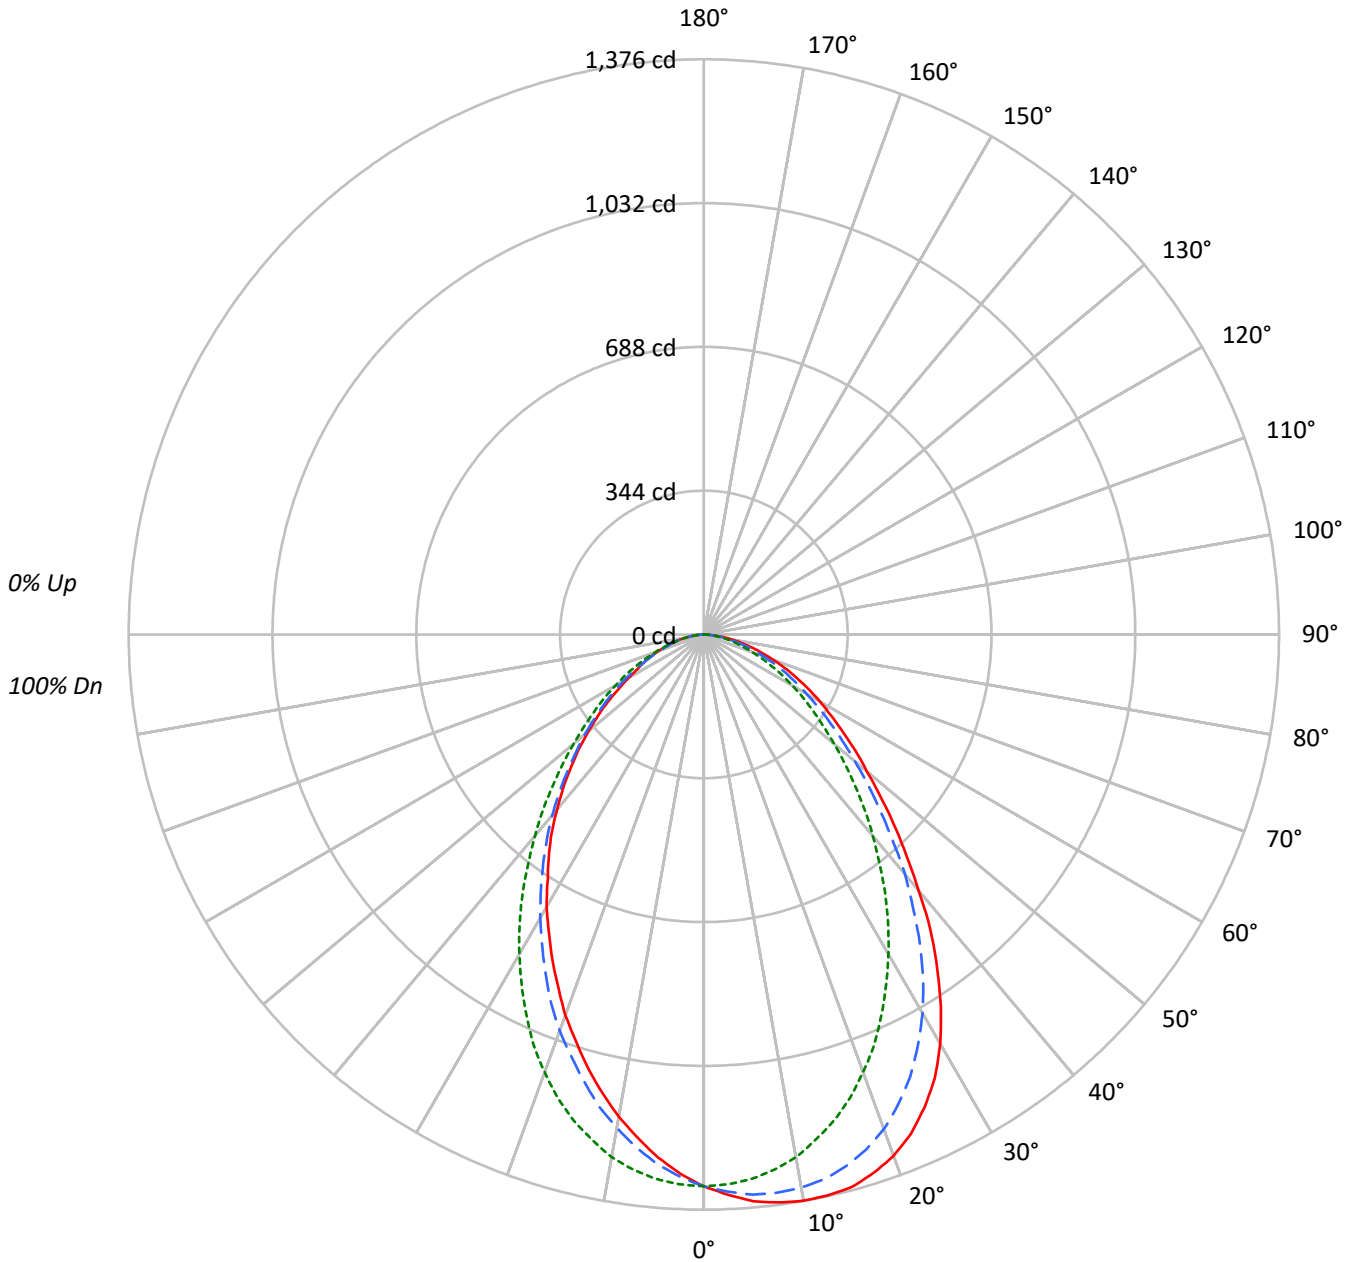

Cooper Lighting Solutions Photometric Lab  
 1121 Highway 74 South  
 Peachtree City, GA 30269



TEST NUMBER: P584318

CATALOG NUMBER: HCC8S30D010MB-HM82555927-81WWW

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20					20					20					20					20					
RC	80					70					50					30					10					0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0		
RCR																										
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100					100			
1	110	106	103	99	108	104	101	98	100	97	95	96	94	92	93	91	89	87					87			
2	102	95	89	84	99	93	88	83	90	85	81	86	83	79	83	80	78	76					76			
3	94	85	78	72	92	83	77	71	81	75	70	78	73	69	75	71	68	66					66			
4	87	76	69	63	85	75	68	62	73	67	62	71	65	61	68	64	60	58					58			
5	81	69	61	55	79	68	61	55	66	60	54	64	59	54	63	57	53	51					51			
6	75	63	55	49	73	62	55	49	61	54	49	59	53	48	57	52	48	46					46			
7	70	58	50	44	69	57	50	44	56	49	44	54	48	44	53	48	43	41					41			
8	66	53	46	40	64	53	45	40	51	45	40	50	44	40	49	44	39	38					38			
9	62	49	42	37	60	49	42	37	48	41	36	47	41	36	46	40	36	34					34			
10	58	46	39	34	57	45	38	34	44	38	33	44	38	33	43	37	33	32					32			

**AVERAGE LUMINANCE (cd/sqm):**

	0°	90°	180°
0°	40707	40707	40707
5°	42138	40472	38869
10°	43076	39766	36679
15°	43688	38427	34255
20°	43556	36560	31798
25°	42476	34187	29193
30°	40246	31444	26787
35°	36613	28451	24341
40°	32159	25308	21991
45°	28041	22267	19607
50°	24404	19506	17270
55°	21768	17145	15021
60°	19778	15023	12816
65°	17774	13068	11631
70°	15823	11135	10495
75°	13868	9388	8971
80°	11756	7636	7956
85°	8881	5732	6369



TEST NUMBER: P584318  
 CATALOG NUMBER: HCC8S30D010MB-HM82555927-81WWW

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	123.6	5.1
10°-20°	340.7	14.0
20°-30°	472.9	19.4
30°-40°	488.9	20.1
40°-50°	409.4	16.8
50°-60°	297.2	12.2
60°-70°	187.6	7.7
70°-80°	92.9	3.8
80°-90°	23.1	0.9
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	937.3	38.5
0°-40°	1426.2	58.5
0°-60°	2132.8	87.5
0°-90°	2436.3	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	2436.3	100.0

**CANDELA DISTRIBUTION:**

	0°	45°	90°	135°	180°	Flux
0°	1320	1320	1320	1320	1320	
5°	1361	1345	1308	1272	1256	130
15°	1368	1317	1204	1107	1073	385
25°	1248	1168	1005	896	858	572
35°	973	901	756	670	647	606
45°	643	596	511	460	450	497
55°	405	369	319	292	279	365
65°	244	213	179	158	159	243
75°	116	97	79	75	75	125
85°	25	20	16	18	18	30
90°	0	0	0	0	0	

Cooper Lighting Solutions Photometric Lab  
 1121 Highway 74 South  
 Peachtree City, GA 30269



TEST NUMBER: P584318

CATALOG NUMBER: HCC8S30D010MB-HM82555927-81WWW

**CANDELA DISTRIBUTION (FULL):**

	0°	5°	10°	15°	20°	22.5°	25°	30°	35°	40°	45°
0°	1320.1	1320.1	1320.1	1320.1	1320.1	1320.1	1320.1	1320.1	1320.1	1320.1	1320.1
2.5°	1341.7	1341.7	1343.5	1341.7	1341.7	1341.7	1339.9	1339.9	1338.1	1338.1	1334.4
5°	1361.3	1357.7	1361.3	1357.7	1357.7	1357.7	1355.9	1352.4	1350.6	1347.0	1345.2
7.5°	1370.3	1368.5	1368.5	1366.8	1366.8	1364.9	1363.1	1361.3	1354.2	1352.4	1347.0
10°	1375.7	1373.9	1373.9	1372.1	1368.5	1368.5	1364.9	1363.1	1354.2	1350.6	1343.5
12.5°	1373.9	1373.9	1373.9	1372.1	1366.8	1364.9	1361.3	1355.9	1348.8	1341.7	1334.4
15°	1368.5	1368.5	1364.9	1363.1	1357.7	1354.2	1352.4	1343.5	1336.2	1327.3	1316.6
17.5°	1350.6	1350.6	1348.8	1345.2	1339.9	1336.2	1332.6	1323.7	1316.6	1302.2	1291.5
20°	1327.3	1325.5	1323.7	1318.4	1313.0	1311.2	1305.8	1293.3	1284.4	1273.5	1259.3
22.5°	1293.3	1291.5	1289.7	1286.1	1277.1	1273.5	1270.0	1261.1	1244.9	1234.2	1216.2
25°	1248.4	1248.4	1244.9	1239.5	1230.6	1226.9	1221.6	1212.7	1198.3	1182.2	1167.8
27.5°	1196.5	1194.7	1189.4	1185.8	1178.7	1173.3	1164.3	1153.6	1139.2	1126.7	1108.7
30°	1130.3	1130.3	1126.7	1121.3	1112.3	1108.7	1101.6	1089.0	1074.7	1058.6	1046.1
32.5°	1055.0	1055.0	1049.6	1046.1	1040.7	1031.7	1029.9	1015.6	1003.0	990.6	976.2
35°	972.6	974.4	970.8	963.7	954.8	954.8	951.1	938.6	924.3	911.7	901.0
37.5°	890.2	884.9	883.1	879.5	874.2	866.9	863.3	858.0	845.5	836.5	820.4
40°	798.9	800.7	797.1	793.5	791.8	786.4	784.5	775.6	766.7	755.8	748.7
42.5°	716.5	716.5	716.5	712.9	709.4	704.0	702.1	696.8	686.1	678.9	668.1
45°	643.0	637.7	637.7	635.9	634.1	630.5	625.2	621.6	614.4	609.0	596.5
47.5°	571.4	573.2	571.4	569.6	564.2	562.4	560.6	553.5	546.3	541.0	532.0
50°	508.7	512.3	508.7	508.7	505.1	503.3	499.7	494.4	489.0	480.0	471.1
52.5°	456.8	456.8	454.9	453.1	447.8	444.2	442.4	440.6	431.7	424.5	417.3
55°	404.9	406.6	406.6	401.3	399.4	395.8	394.0	388.7	385.1	374.4	368.9
57.5°	360.0	358.2	360.0	356.5	352.9	349.3	347.5	343.9	338.5	331.4	324.2
60°	320.7	317.0	317.0	315.2	311.6	309.9	306.3	300.9	295.6	288.3	283.0
62.5°	281.2	279.4	277.6	275.8	272.3	270.5	268.7	263.4	257.9	252.5	247.2
65°	243.6	243.6	241.8	238.3	236.5	234.7	232.8	229.2	222.1	218.5	213.2
67.5°	209.6	207.8	207.8	204.2	200.6	198.8	198.8	195.2	189.9	184.5	181.0
70°	175.5	177.3	175.5	173.7	170.1	170.1	166.6	164.8	157.7	155.9	150.4
72.5°	145.1	145.1	143.3	143.3	139.7	137.9	137.9	134.4	130.8	127.2	123.5
75°	116.4	116.4	116.4	114.6	112.8	109.3	109.3	107.5	103.9	100.4	96.8
77.5°	91.3	89.5	89.5	87.7	86.0	84.2	84.2	82.4	78.8	77.0	73.5
80°	66.2	64.4	64.4	64.4	60.9	62.7	60.9	59.1	57.3	55.5	53.7
82.5°	43.0	44.8	44.8	43.0	41.1	41.1	41.1	39.4	39.4	37.6	35.8
85°	25.1	25.1	25.1	25.1	23.3	23.3	23.3	21.5	21.5	21.5	19.7
87.5°	10.7	10.7	10.7	10.7	10.7	10.7	8.9	8.9	8.9	8.9	8.9
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0



TEST NUMBER: P584318

CATALOG NUMBER: HCC8S30D010MB-HM82555927-81WWW

**CANDELA DISTRIBUTION (continued):**

	50°	55°	60°	65°	67.5°	70°	75°	80°	85°	90°	95°
0°	1320.1	1320.1	1320.1	1320.1	1320.1	1320.1	1320.1	1320.1	1320.1	1320.1	1320.1
2.5°	1334.4	1330.8	1329.1	1327.3	1327.3	1325.5	1323.7	1320.1	1320.1	1316.6	1314.8
5°	1341.7	1336.2	1332.6	1329.1	1327.3	1323.7	1320.1	1314.8	1313.0	1307.5	1302.2
7.5°	1343.5	1334.4	1330.8	1323.7	1320.1	1316.6	1309.3	1304.0	1296.8	1291.5	1284.4
10°	1336.2	1329.1	1320.1	1311.2	1309.3	1304.0	1293.3	1286.1	1277.1	1270.0	1259.3
12.5°	1325.5	1314.8	1305.8	1295.1	1289.7	1284.4	1273.5	1262.8	1250.2	1237.7	1226.9
15°	1307.5	1295.1	1282.6	1270.0	1262.8	1257.5	1244.9	1232.4	1219.8	1203.7	1192.9
17.5°	1280.7	1266.4	1253.8	1237.7	1230.6	1225.1	1209.1	1194.7	1178.7	1162.5	1151.8
20°	1246.7	1228.8	1214.4	1196.5	1191.1	1182.2	1166.1	1150.0	1132.0	1114.1	1101.6
22.5°	1202.0	1184.0	1167.8	1150.0	1141.0	1132.0	1115.9	1096.3	1078.3	1064.0	1051.4
25°	1150.0	1133.8	1114.1	1098.0	1087.2	1076.5	1058.6	1042.5	1026.3	1004.8	992.3
27.5°	1092.7	1073.0	1058.6	1037.2	1026.3	1019.2	999.5	978.0	963.7	943.9	929.7
30°	1028.1	1010.3	994.1	972.6	961.9	954.8	936.8	917.1	902.8	883.1	868.8
32.5°	960.1	940.4	920.6	906.4	893.8	886.6	866.9	854.4	836.5	820.4	804.2
35°	886.6	866.9	852.6	832.9	825.8	818.6	802.5	786.4	770.2	755.8	743.4
37.5°	807.8	793.5	777.4	763.1	757.6	750.5	730.8	716.5	704.0	689.6	678.9
40°	730.8	718.3	707.6	693.2	684.3	678.9	664.5	652.0	637.7	628.7	617.9
42.5°	661.0	646.6	635.9	625.2	616.1	610.8	598.3	589.3	578.6	569.6	557.0
45°	587.5	580.4	567.9	558.8	553.5	546.3	537.3	526.6	517.7	510.6	501.5
47.5°	523.0	515.9	506.9	496.2	492.6	487.3	478.2	471.1	463.9	456.8	447.8
50°	463.9	454.9	447.8	440.6	437.1	431.7	422.7	419.1	413.8	406.6	401.3
52.5°	410.2	403.1	395.8	386.9	385.1	381.6	376.2	368.9	363.6	360.0	356.5
55°	361.8	354.7	349.3	342.1	340.3	336.7	329.6	326.0	322.5	318.9	315.2
57.5°	318.9	311.6	304.5	300.9	297.4	293.8	292.0	286.5	283.0	281.2	277.6
60°	279.4	272.3	266.9	261.5	259.7	257.9	254.3	250.8	247.2	243.6	241.8
62.5°	241.8	234.7	231.0	227.5	223.9	223.9	220.3	216.8	213.2	211.4	207.8
65°	207.8	204.2	198.8	193.5	191.7	191.7	186.3	184.5	182.7	179.1	175.5
67.5°	175.5	171.9	166.6	164.8	163.0	161.2	159.4	155.9	152.3	150.4	146.8
70°	146.8	143.3	139.7	137.9	136.1	134.4	130.8	129.0	125.4	123.5	121.8
72.5°	118.2	116.4	112.8	111.1	109.3	107.5	105.7	103.9	100.4	98.6	96.8
75°	94.9	93.1	89.5	87.7	86.0	86.0	84.2	80.6	78.8	78.8	77.0
77.5°	71.7	69.9	68.0	66.2	64.4	64.4	62.7	60.9	59.1	59.1	57.3
80°	52.0	50.2	48.4	48.4	48.4	46.6	44.8	44.8	43.0	43.0	41.1
82.5°	34.0	34.0	32.2	32.2	32.2	30.4	30.4	28.7	28.7	28.7	28.7
85°	19.7	19.7	19.7	18.0	18.0	18.0	18.0	18.0	18.0	16.2	18.0
87.5°	8.9	8.9	8.9	8.9	8.9	8.9	8.9	8.9	7.1	7.1	7.1
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Cooper Lighting Solutions Photometric Lab  
 1121 Highway 74 South  
 Peachtree City, GA 30269



TEST NUMBER: P584318

CATALOG NUMBER: HCC8S30D010MB-HM82555927-81WWW

**CANDELA DISTRIBUTION (continued):**

	100°	105°	110°	112.5°	115°	120°	125°	130°	135°	140°	145°
0°	1320.1	1320.1	1320.1	1320.1	1320.1	1320.1	1320.1	1320.1	1320.1	1320.1	1320.1
2.5°	1313.0	1311.2	1307.5	1307.5	1304.0	1304.0	1302.2	1300.4	1298.6	1296.8	1295.1
5°	1300.4	1293.3	1289.7	1287.9	1284.4	1282.6	1277.1	1273.5	1271.8	1268.2	1264.6
7.5°	1277.1	1270.0	1262.8	1261.1	1259.3	1252.0	1246.7	1241.3	1237.7	1234.2	1230.6
10°	1250.2	1243.1	1234.2	1230.6	1226.9	1218.0	1210.9	1205.5	1198.3	1191.1	1189.4
12.5°	1218.0	1207.3	1196.5	1192.9	1187.6	1178.7	1171.4	1162.5	1157.1	1148.2	1146.4
15°	1180.4	1167.8	1158.9	1150.0	1146.4	1137.4	1124.9	1117.8	1107.0	1103.4	1094.5
17.5°	1135.6	1123.1	1110.5	1107.0	1101.6	1089.0	1076.5	1067.6	1056.8	1051.4	1046.1
20°	1089.0	1073.0	1060.4	1056.8	1049.6	1038.9	1026.3	1017.4	1008.5	997.7	992.3
22.5°	1035.4	1017.4	1006.7	997.7	995.9	983.4	969.0	961.9	954.8	945.7	938.6
25°	976.2	960.1	947.5	940.4	936.8	926.1	915.3	906.4	895.6	890.2	881.3
27.5°	915.3	904.6	888.4	881.3	875.9	866.9	854.4	849.1	838.2	831.1	825.8
30°	856.2	840.0	831.1	822.2	816.8	807.8	797.1	791.8	782.7	775.6	770.2
32.5°	791.8	780.9	768.5	764.9	757.6	748.7	741.6	732.7	725.4	718.3	716.5
35°	732.7	718.3	705.8	702.1	696.8	687.8	684.3	678.9	669.9	668.1	661.0
37.5°	668.1	661.0	646.6	641.2	639.4	632.3	625.2	621.6	616.1	610.8	609.0
40°	607.2	598.3	591.1	585.7	582.1	576.8	569.6	567.9	564.2	557.0	555.3
42.5°	549.9	541.0	533.7	532.0	526.6	521.3	517.7	512.3	510.6	508.7	505.1
45°	494.4	489.0	481.8	480.0	478.2	471.1	467.5	463.9	460.4	458.6	454.9
47.5°	444.2	438.9	433.5	431.7	428.2	426.3	420.9	419.1	413.8	412.0	410.2
50°	395.8	392.3	388.7	386.9	383.3	381.6	378.0	374.4	370.7	368.9	367.2
52.5°	352.9	349.3	345.8	343.9	342.1	338.5	334.9	331.4	329.6	327.8	326.0
55°	311.6	308.1	306.3	304.5	302.7	300.9	295.6	293.8	292.0	290.2	286.5
57.5°	274.1	270.5	266.9	266.9	265.1	263.4	259.7	256.1	256.1	252.5	249.0
60°	240.1	236.5	232.8	231.0	229.2	225.7	223.9	222.1	220.3	218.5	215.0
62.5°	204.2	202.4	198.8	198.8	195.2	193.5	191.7	189.9	188.1	184.5	182.7
65°	173.7	171.9	168.4	166.6	166.6	164.8	161.2	159.4	157.7	157.7	155.9
67.5°	145.1	143.3	139.7	137.9	137.9	136.1	134.4	134.4	132.6	130.8	132.6
70°	120.0	116.4	116.4	114.6	114.6	112.8	111.1	111.1	111.1	112.8	112.8
72.5°	94.9	93.1	91.3	91.3	91.3	91.3	89.5	89.5	91.3	93.1	93.1
75°	75.3	73.5	73.5	73.5	71.7	71.7	73.5	73.5	75.3	75.3	75.3
77.5°	55.5	55.5	55.5	55.5	55.5	55.5	57.3	57.3	59.1	59.1	59.1
80°	41.1	41.1	41.1	41.1	41.1	43.0	43.0	43.0	43.0	43.0	44.8
82.5°	28.7	28.7	28.7	28.7	28.7	28.7	28.7	30.4	30.4	30.4	30.4
85°	16.2	18.0	18.0	18.0	18.0	18.0	18.0	18.0	18.0	18.0	18.0
87.5°	7.1	7.1	7.1	7.1	7.1	7.1	7.1	7.1	7.1	7.1	7.1
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0



Cooper Lighting Solutions Photometric Lab  
 1121 Highway 74 South  
 Peachtree City, GA 30269



TEST NUMBER: P584318

CATALOG NUMBER: HCC8S30D010MB-HM82555927-81WWW

**CANDELA DISTRIBUTION (continued):**

	150°	155°	157.5°	160°	165°	170°	175°	180°
0°	1320.1	1320.1	1320.1	1320.1	1320.1	1320.1	1320.1	1320.1
2.5°	1293.3	1293.3	1293.3	1295.1	1291.5	1291.5	1291.5	1291.5
5°	1262.8	1261.1	1259.3	1261.1	1257.5	1257.5	1255.7	1255.7
7.5°	1225.1	1223.4	1221.6	1221.6	1218.0	1218.0	1216.2	1214.4
10°	1184.0	1180.4	1182.2	1178.7	1176.9	1175.1	1173.3	1171.4
12.5°	1139.2	1135.6	1133.8	1130.3	1126.7	1124.9	1126.7	1123.1
15°	1090.9	1085.4	1083.7	1080.1	1076.5	1074.7	1074.7	1073.0
17.5°	1037.2	1033.5	1031.7	1028.1	1026.3	1022.8	1021.0	1019.2
20°	987.0	978.0	979.9	976.2	974.4	967.3	967.3	969.0
22.5°	931.5	926.1	922.4	918.9	917.1	913.5	913.5	911.7
25°	875.9	870.6	868.8	865.1	863.3	859.8	858.0	858.0
27.5°	822.2	815.1	815.1	811.4	807.8	806.0	804.2	802.5
30°	764.9	759.5	757.6	757.6	755.8	755.8	750.5	752.3
32.5°	711.1	707.6	705.8	702.1	702.1	700.3	700.3	695.0
35°	657.4	652.0	653.8	650.3	648.5	646.6	648.5	646.6
37.5°	605.4	601.9	601.9	598.3	598.3	596.5	594.7	598.3
40°	553.5	551.7	549.9	548.1	549.9	548.1	544.6	546.3
42.5°	501.5	501.5	499.7	499.7	498.0	498.0	498.0	498.0
45°	454.9	453.1	453.1	451.3	451.3	451.3	451.3	449.6
47.5°	408.4	406.6	406.6	406.6	404.9	404.9	403.1	404.9
50°	363.6	363.6	361.8	361.8	363.6	361.8	360.0	360.0
52.5°	322.5	322.5	320.7	320.7	318.9	317.0	318.9	318.9
55°	284.8	283.0	281.2	281.2	279.4	277.6	277.6	279.4
57.5°	249.0	247.2	245.4	245.4	241.8	240.1	240.1	240.1
60°	215.0	211.4	211.4	209.6	209.6	207.8	207.8	207.8
62.5°	182.7	181.0	181.0	181.0	181.0	179.1	179.1	179.1
65°	155.9	155.9	155.9	157.7	157.7	159.4	159.4	159.4
67.5°	134.4	136.1	136.1	136.1	137.9	137.9	137.9	136.1
70°	114.6	114.6	114.6	116.4	116.4	116.4	116.4	116.4
72.5°	94.9	94.9	94.9	94.9	94.9	94.9	94.9	94.9
75°	75.3	77.0	77.0	77.0	75.3	77.0	77.0	75.3
77.5°	59.1	59.1	59.1	59.1	59.1	59.1	59.1	59.1
80°	44.8	44.8	44.8	44.8	44.8	44.8	44.8	44.8
82.5°	30.4	30.4	30.4	30.4	30.4	30.4	30.4	30.4
85°	18.0	18.0	18.0	18.0	18.0	18.0	18.0	18.0
87.5°	7.1	7.1	7.1	7.1	7.1	7.1	7.1	7.1
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Classified  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Classified  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Classified  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°    - - 45°-225°    - - - - 90°-270°

Classified  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Classified  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Classified  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Classified  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report





Classified  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Classified  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)