

Classified
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: HALO COMMERCIAL

Report Number: P584350

Luminaire Tested: **HCC8W30D010SL-HM82555935-81WDWB**

Issue Date: 10/21/2021

Test Information

Test Method: LM-41-14
Report Number: P584350
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2109-368-10)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 10/21/2021
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: HALO COMMERCIAL
Catalog Number: HCC8W30D010SL-HM82555935-81WDWB
Description: HALO COMMERCIAL 8" ROUND, NEW CONSTRUCTION FRAME, WITH 8" WIDE DISTRIBUTION, WHITE BAFFLE TRIM
Light Source: (1) HIGH LUMEN LED 90CRI / 3500K CCT CYLINDER
Ballast/Driver: ELECTRONIC DRIVER

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 3532.3 lumens
Efficiency: N/A
Efficacy: 126.2 lumens/watt
Spacing Criteria (0/90/45): 1.32 / 1.32 / 1.14
Luminous Opening: Circular (Dia: 0.67' x H: 0')
CIE Type: Direct

Input Watts (W): 28
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P584350
CATALOG NUMBER: HCC8W30D010SL-HM82555935-81WDWB

Luminous Intensity Polar Plot

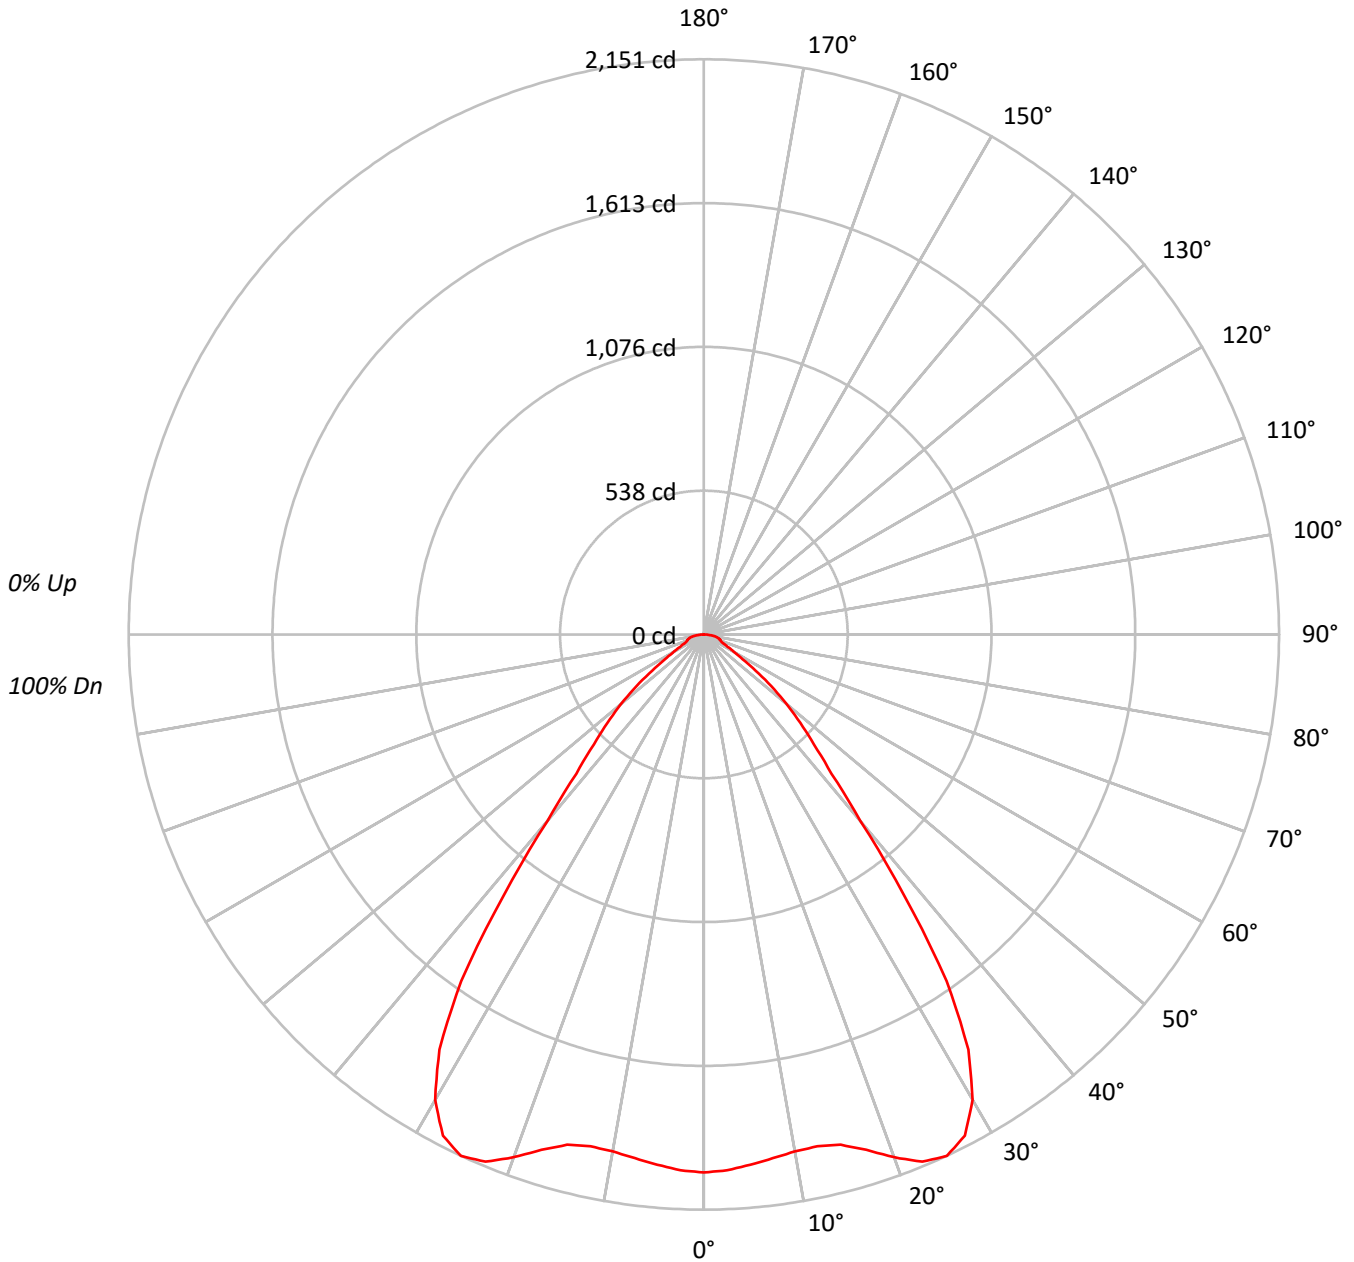



TEST NUMBER: P584350
 CATALOG NUMBER: HCC8W30D010SL-HM82555935-81WDWB

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									20								
RC	80									50									30									10									0								
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0															
RCR	0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	100	100	100	100	100	100	100	100	100	100	100															
	1	112	108	105	103	109	106	103	101	102	100	98	98	97	95	95	93	92	90	90	90	90	90	90	90	90	90	90	90	90															
	2	105	99	94	89	102	97	92	88	93	90	86	90	87	84	88	85	83	81	81	81	81	81	81	81	81	81	81	81	81															
	3	98	90	84	79	96	88	83	78	86	81	77	83	79	76	81	77	74	73	73	73	73	73	73	73	73	73	73	73	73															
	4	92	82	75	70	90	81	75	70	79	73	69	77	72	68	75	71	67	65	65	65	65	65	65	65	65	65	65	65	65															
	5	86	75	68	63	84	74	68	63	73	67	62	71	66	62	69	65	61	59	59	59	59	59	59	59	59	59	59	59	59															
	6	80	69	62	57	79	69	62	57	67	61	56	65	60	56	64	59	56	54	54	54	54	54	54	54	54	54	54	54	54															
	7	75	64	57	52	74	63	57	52	62	56	51	61	55	51	59	55	51	49	49	49	49	49	49	49	49	49	49	49	49															
	8	71	59	52	47	69	59	52	47	58	51	47	56	51	47	55	50	47	45	45	45	45	45	45	45	45	45	45	45	45															
	9	67	55	48	43	65	55	48	43	54	47	43	53	47	43	52	47	43	41	41	41	41	41	41	41	41	41	41	41	41															
	10	63	51	45	40	62	51	44	40	50	44	40	49	44	40	48	43	40	38	38	38	38	38	38	38	38	38	38	38	38															

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	62036
5°	61611
10°	61447
15°	63063
20°	68272
25°	73196
30°	71555
35°	59587
40°	36603
45°	25346
50°	19343
55°	12682
60°	7931
65°	5939
70°	5996
75°	6898
80°	7618
85°	6828



TEST NUMBER: P584350
 CATALOG NUMBER: HCC8W30D010SL-HM82555935-81WDWB

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	189.1	5.4
10°-20°	567.0	16.1
20°-30°	976.2	27.6
30°-40°	945.8	26.8
40°-50°	465.8	13.2
50°-60°	219.8	6.2
60°-70°	86.6	2.5
70°-80°	59.8	1.7
80°-90°	22.2	0.6
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1732.4	49.0
0°-40°	2678.1	75.8
0°-60°	3363.8	95.2
0°-90°	3532.3	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	3532.3	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	2012	
5°	1990	189
15°	1975	567
25°	2151	976
35°	1583	946
45°	581	466
55°	236	220
65°	81	87
75°	58	60
85°	19	22
90°	0	



TEST NUMBER: P584350
CATALOG NUMBER: HCC8W30D010SL-HM82555935-81WDWB

CANDELA DISTRIBUTION (FULL):

	0°
0°	2011.8
2.5°	2005.4
5°	1990.4
7.5°	1975.4
10°	1962.4
12.5°	1960.3
15°	1975.4
17.5°	2020.3
20°	2080.5
22.5°	2134.1
25°	2151.3
27.5°	2112.6
30°	2009.6
32.5°	1840.2
35°	1582.9
37.5°	1229.0
40°	909.3
42.5°	705.7
45°	581.2
47.5°	489.0
50°	403.2
52.5°	317.5
55°	235.9
57.5°	171.6
60°	128.6
62.5°	100.8
65°	81.4
67.5°	70.7
70°	66.5
72.5°	62.2
75°	57.9
77.5°	51.5
80°	42.9
82.5°	32.2
85°	19.3
87.5°	8.6
90°	0.0

Classified
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Classified
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Classified
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Classified
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Classified
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Classified
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)