

Classified  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269



Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: HALO COMMERCIAL

Report Number: P584384

Luminaire Tested: **HCC8S35D010MB-HM82555827-81WDWB**

Issue Date: 10/21/2021

**Test Information**

Test Method: LM-41-14  
Report Number: P584384  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2109-368-10)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 10/21/2021  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: HALO COMMERCIAL  
Catalog Number: HCC8S35D010MB-HM82555827-81WDWB  
Description: HALO COMMERCIAL 8" ROUND, NEW CONSTRUCTION FRAME, WITH 8" WIDE DISTRIBUTION, WHITE BAFFLE TRIM  
Light Source: (1) HIGH LUMEN LED 80CRI / 2700K CCT CYLINDER  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**


Lumens per Lamp: N/A  
Luminaire Lumens: 4397.7 lumens  
Efficiency: N/A  
Efficacy: 130.5 lumens/watt  
Spacing Criteria (0/90/45): 1.32 / 1.32 / 1.14  
Luminous Opening: Circular (Dia: 0.67' x H: 0')  
CIE Type: Direct

Input Watts (W): 33.7  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P584384  
CATALOG NUMBER: HCC8S35D010MB-HM82555827-81WDWB

### Luminous Intensity Polar Plot

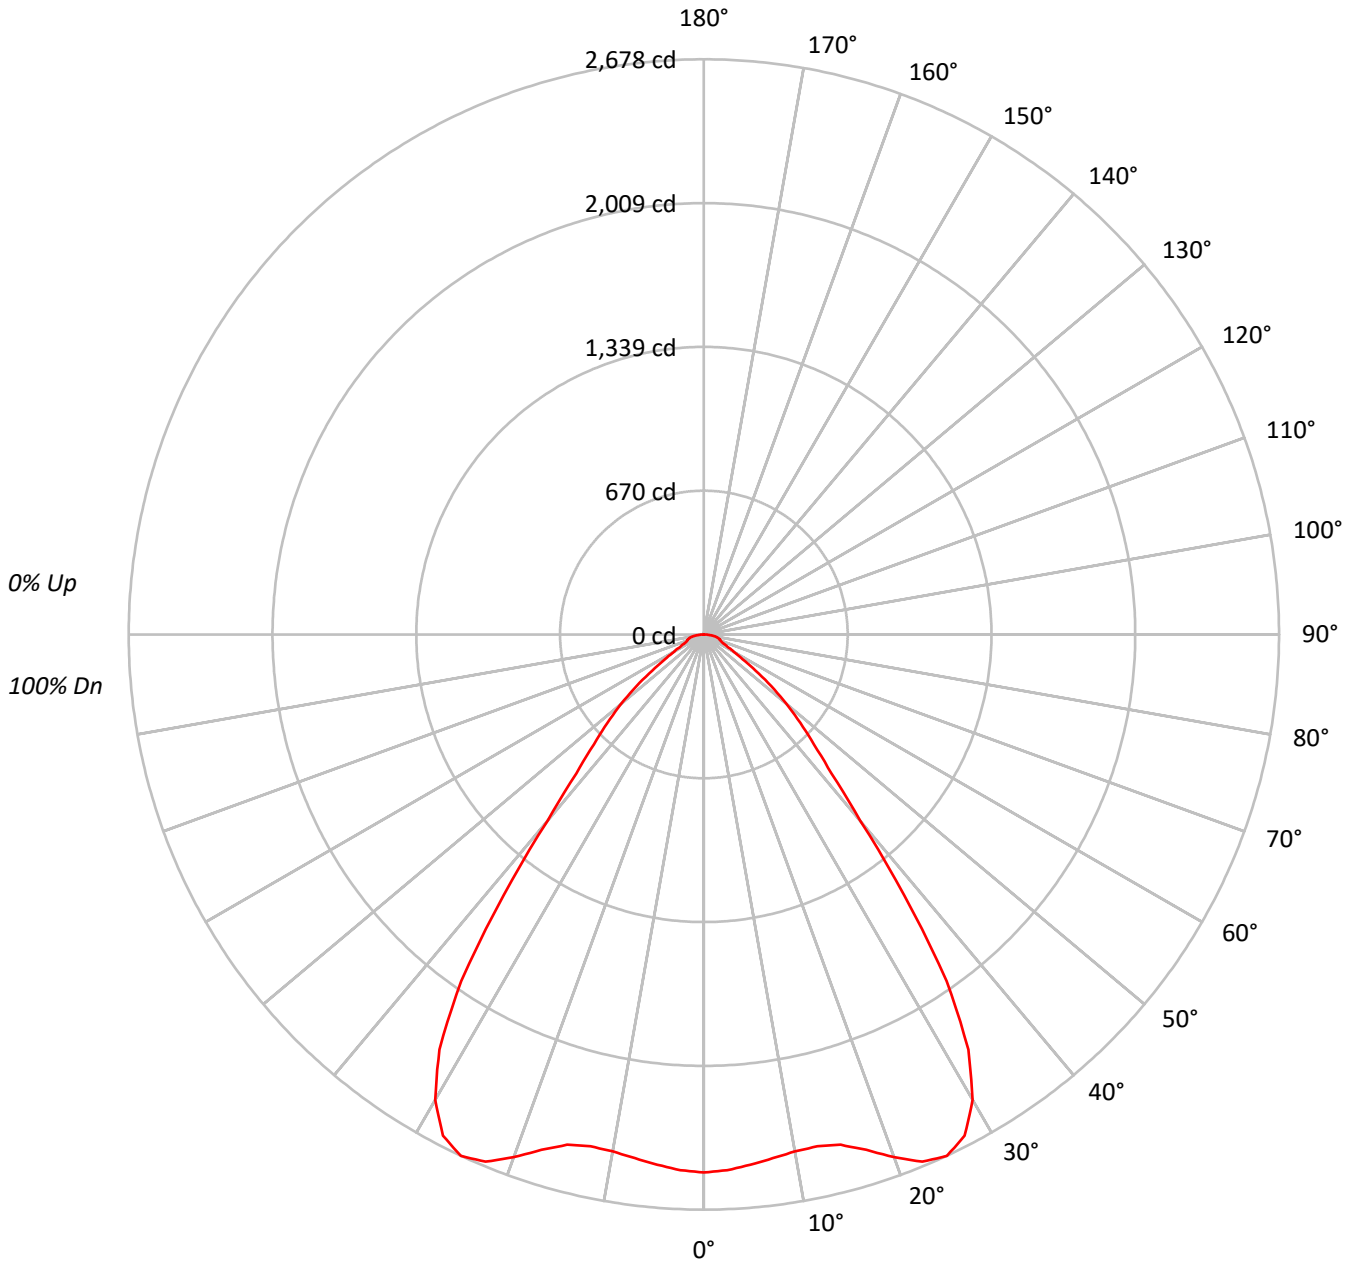



TEST NUMBER: P584384  
 CATALOG NUMBER: HCC8S35D010MB-HM82555827-81WDWB

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																			
1	112	108	105	103	109	106	103	101	102	100	98	98	97	95	95	93	92	90																			
2	105	99	94	89	102	97	92	88	93	90	86	90	87	84	88	85	83	81																			
3	98	90	84	79	96	88	83	78	86	81	77	83	79	76	81	77	74	73																			
4	92	82	75	70	90	81	75	70	79	73	69	77	72	68	75	71	67	65																			
5	86	75	68	63	84	74	68	63	73	67	62	71	66	62	69	65	61	59																			
6	80	69	62	57	79	69	62	57	67	61	56	65	60	56	64	59	56	54																			
7	75	64	57	52	74	63	57	52	62	56	51	61	55	51	59	55	51	49																			
8	71	59	52	47	69	59	52	47	58	51	47	56	51	47	55	50	47	45																			
9	67	55	48	43	65	55	48	43	54	47	43	53	47	43	52	47	43	41																			
10	63	51	45	40	62	51	44	40	50	44	40	49	44	40	48	43	40	38																			

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	77236
5°	76701
10°	76502
15°	78511
20°	84995
25°	91120
30°	89084
35°	74182
40°	45571
45°	31556
50°	24082
55°	15790
60°	9880
65°	7406
70°	7465
75°	8590
80°	9483
85°	8527



TEST NUMBER: P584384  
 CATALOG NUMBER: HCC8S35D010MB-HM82555827-81WDWB

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	235.4	5.4
10°-20°	706.0	16.1
20°-30°	1215.3	27.6
30°-40°	1177.5	26.8
40°-50°	580.0	13.2
50°-60°	273.7	6.2
60°-70°	107.9	2.5
70°-80°	74.4	1.7
80°-90°	27.6	0.6
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	2156.7	49.0
0°-40°	3334.2	75.8
0°-60°	4187.8	95.2
0°-90°	4397.7	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	4397.7	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	2505	
5°	2478	235
15°	2459	706
25°	2678	1215
35°	1971	1177
45°	724	580
55°	294	274
65°	102	108
75°	72	74
85°	24	28
90°	0	



TEST NUMBER: P584384

CATALOG NUMBER: HCC8S35D010MB-HM82555827-81WDWB

**CANDELA DISTRIBUTION (FULL):**

0°	
0°	2504.7
2.5°	2496.6
5°	2477.9
7.5°	2459.3
10°	2443.2
12.5°	2440.6
15°	2459.3
17.5°	2515.3
20°	2590.1
22.5°	2656.8
25°	2678.1
27.5°	2630.1
30°	2501.9
32.5°	2291.1
35°	1970.6
37.5°	1530.0
40°	1132.1
42.5°	878.5
45°	723.6
47.5°	608.8
50°	502.0
52.5°	395.2
55°	293.7
57.5°	213.6
60°	160.2
62.5°	125.6
65°	101.5
67.5°	88.2
70°	82.8
72.5°	77.4
75°	72.1
77.5°	64.1
80°	53.4
82.5°	40.0
85°	24.1
87.5°	10.7
90°	0.0

Classified  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Classified  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report





Classified  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Classified  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Classified  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Classified  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)