

Classified  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269



Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: HALO COMMERCIAL

Report Number: P584556

Luminaire Tested: **HCC8S40D010MW-HM82555835-81WWW**

Issue Date: 10/21/2021

**Test Information**

Test Method: LM-41-14  
Report Number: P584556  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2109-368-16)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 10/21/2021  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: HALO COMMERCIAL  
Catalog Number: HCC8S40D010MW-HM82555835-81WWW  
Description: HALO COMMERCIAL 8" ROUND, NEW CONSTRUCTION FRAME, WITH 8" WALLWASH DISTRIBUTION, WHITE TRIM  
Light Source: (1) HIGH LUMEN LED 80CRI / 3500K CCT  
CYLINDER  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**


Lumens per Lamp: N/A  
Luminaire Lumens: 4355.2 lumens  
Efficiency: N/A  
Efficacy: 106.2 lumens/watt  
Spacing Criteria (0/90/45): 1.09 / 1.04 / 1.13  
Luminous Opening: Circular (Dia: 0.67' x H: 0')  
CIE Type: Direct

Input Watts (W): 41  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P584556  
CATALOG NUMBER: HCC8S40D010MW-HM82555835-81WWW

### Luminous Intensity Polar Plot

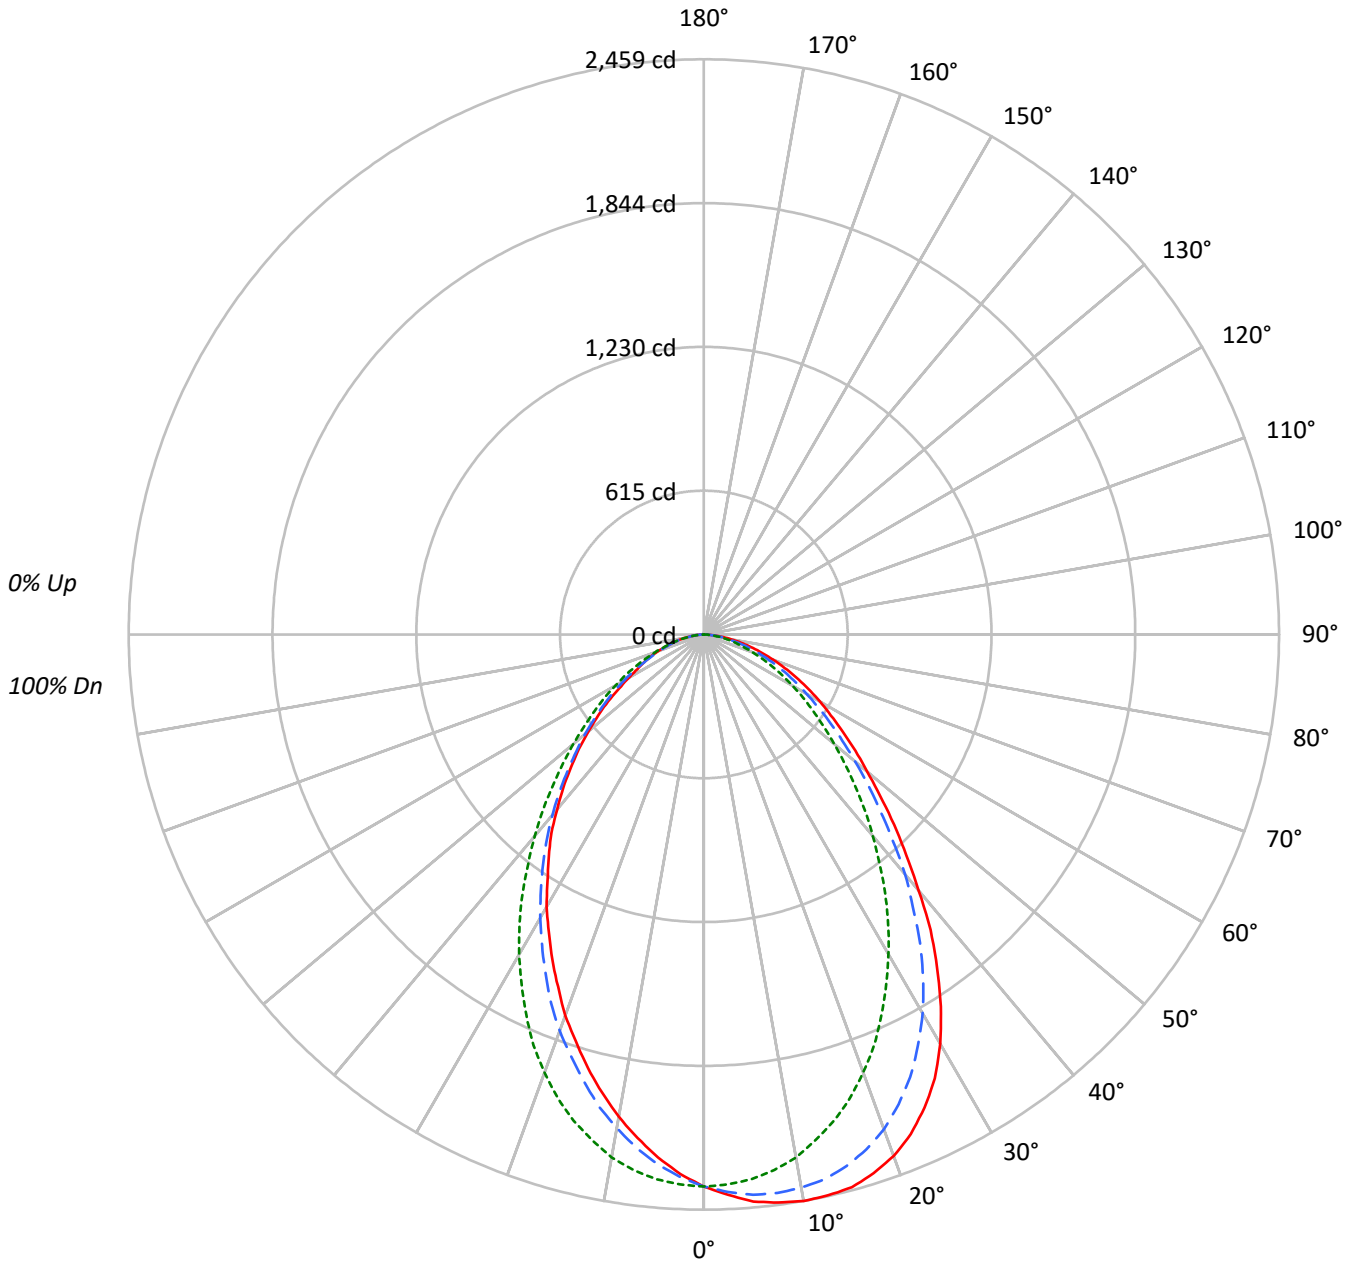

Cooper Lighting Solutions Photometric Lab  
 1121 Highway 74 South  
 Peachtree City, GA 30269



TEST NUMBER: P584556

CATALOG NUMBER: HCC8S40D010MW-HM82555835-81WWW

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20					20					20					20					20					
RC	80					70					50					30					10					0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0		
RCR																										
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100					100			
1	110	106	103	99	108	104	101	98	100	97	95	96	94	92	93	91	89	87					87			
2	102	95	89	84	99	93	88	83	90	85	81	86	83	79	83	80	78	76					76			
3	94	85	78	72	92	83	77	71	81	75	70	78	73	69	75	71	68	66					66			
4	87	76	69	63	85	75	68	62	73	67	62	71	65	61	68	64	60	58					58			
5	81	69	61	55	79	68	61	55	66	60	54	64	59	54	63	57	53	51					51			
6	75	63	55	49	73	62	55	49	61	54	49	59	53	48	57	52	48	46					46			
7	70	58	50	44	69	57	50	44	56	49	44	54	48	44	53	48	43	41					41			
8	66	53	46	40	64	53	45	40	51	45	40	50	44	40	49	44	39	38					38			
9	62	49	42	37	60	49	42	37	48	41	36	47	41	36	46	40	36	34					34			
10	58	46	39	34	57	45	38	34	44	38	33	44	38	33	43	37	33	32					32			

**AVERAGE LUMINANCE (cd/sqm):**

	0°	90°	180°
0°	72768	72768	72768
5°	75324	72352	69480
10°	76999	71085	65567
15°	78096	68688	61227
20°	77858	65355	56846
25°	75932	61118	52183
30°	71940	56205	47884
35°	65448	50865	43509
40°	57487	45237	39312
45°	50129	39793	35049
50°	43626	34871	30875
55°	38902	30639	26848
60°	35345	26852	22905
65°	31769	23363	20795
70°	28292	19925	18762
75°	24794	16787	16025
80°	21043	13656	14224
85°	15886	10190	11322



TEST NUMBER: P584556

CATALOG NUMBER: HCC8S40D010MW-HM82555835-81WWW

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	221.0	5.1
10°-20°	609.0	14.0
20°-30°	845.4	19.4
30°-40°	874.0	20.1
40°-50°	731.8	16.8
50°-60°	531.3	12.2
60°-70°	335.3	7.7
70°-80°	166.1	3.8
80°-90°	41.3	0.9
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1675.4	38.5
0°-40°	2549.4	58.5
0°-60°	3812.5	87.5
0°-90°	4355.2	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	4355.2	100.0

**CANDELA DISTRIBUTION:**

	0°	45°	90°	135°	180°	Flux
0°	2360	2360	2360	2360	2360	
5°	2433	2405	2337	2273	2245	233
15°	2446	2354	2152	1979	1918	688
25°	2232	2088	1796	1601	1534	1023
35°	1739	1610	1351	1198	1156	1083
45°	1150	1066	912	823	804	889
55°	724	660	570	522	499	653
65°	435	381	320	282	285	434
75°	208	173	141	134	134	223
85°	45	35	29	32	32	54
90°	0	0	0	0	0	



TEST NUMBER: P584556

CATALOG NUMBER: HCC8S40D010MW-HM82555835-81WWW

**CANDELA DISTRIBUTION (FULL):**

	0°	5°	10°	15°	20°	22.5°	25°	30°	35°	40°	45°
0°	2359.8	2359.8	2359.8	2359.8	2359.8	2359.8	2359.8	2359.8	2359.8	2359.8	2359.8
2.5°	2398.2	2398.2	2401.4	2398.2	2398.2	2398.2	2395.0	2395.0	2391.9	2391.9	2385.5
5°	2433.4	2427.0	2433.4	2427.0	2427.0	2427.0	2423.9	2417.5	2414.3	2407.8	2404.6
7.5°	2449.5	2446.3	2446.3	2443.1	2443.1	2439.9	2436.6	2433.4	2420.7	2417.5	2407.8
10°	2459.1	2455.9	2455.9	2452.7	2446.3	2446.3	2439.9	2436.6	2420.7	2414.3	2401.4
12.5°	2455.9	2455.9	2455.9	2452.7	2443.1	2439.9	2433.4	2423.9	2411.1	2398.2	2385.5
15°	2446.3	2446.3	2439.9	2436.6	2427.0	2420.7	2417.5	2401.4	2388.7	2372.6	2353.5
17.5°	2414.3	2414.3	2411.1	2404.6	2395.0	2388.7	2382.3	2366.2	2353.5	2327.8	2308.6
20°	2372.6	2369.4	2366.2	2356.7	2347.0	2343.8	2334.2	2311.8	2295.7	2276.6	2251.0
22.5°	2311.8	2308.6	2305.4	2299.0	2283.0	2276.6	2270.2	2254.2	2225.3	2206.1	2174.1
25°	2231.7	2231.7	2225.3	2215.8	2199.7	2193.3	2183.8	2167.7	2142.1	2113.3	2087.6
27.5°	2138.9	2135.7	2126.1	2119.6	2106.9	2097.3	2081.3	2062.0	2036.4	2014.0	1981.9
30°	2020.4	2020.4	2014.0	2004.4	1988.4	1981.9	1969.2	1946.7	1921.1	1892.3	1870.0
32.5°	1885.9	1885.9	1876.3	1870.0	1860.3	1844.3	1841.2	1815.5	1793.1	1770.7	1745.0
35°	1738.6	1741.8	1735.5	1722.6	1706.6	1706.6	1700.3	1677.8	1652.2	1629.8	1610.5
37.5°	1591.4	1581.7	1578.5	1572.1	1562.6	1549.7	1543.3	1533.7	1511.3	1495.4	1466.4
40°	1428.1	1431.2	1424.9	1418.5	1415.3	1405.6	1402.4	1386.5	1370.4	1351.2	1338.4
42.5°	1280.8	1280.8	1280.8	1274.4	1267.9	1258.3	1255.2	1245.6	1226.3	1213.6	1194.3
45°	1149.5	1139.9	1139.9	1136.7	1133.5	1127.0	1117.5	1111.1	1098.3	1088.6	1066.2
47.5°	1021.4	1024.6	1021.4	1018.2	1008.6	1005.4	1002.2	989.4	976.6	967.0	950.9
50°	909.4	915.7	909.4	909.4	903.0	899.8	893.3	883.7	874.2	858.1	842.2
52.5°	816.5	816.5	813.2	810.0	800.5	794.1	790.9	787.7	771.7	758.9	746.0
55°	723.6	726.9	726.9	717.2	714.0	707.6	704.5	694.8	688.4	669.3	659.6
57.5°	643.6	640.3	643.6	637.1	630.8	624.4	621.2	614.8	605.1	592.4	579.5
60°	573.1	566.8	566.8	563.6	557.2	553.9	547.5	537.9	528.4	515.5	505.9
62.5°	502.7	499.4	496.3	493.1	486.7	483.5	480.3	470.6	461.1	451.5	441.8
65°	435.4	435.4	432.2	425.9	422.7	419.5	416.3	409.8	397.0	390.7	381.0
67.5°	374.6	371.4	371.4	365.0	358.7	355.5	355.5	349.0	339.4	329.7	323.4
70°	313.8	317.0	313.8	310.6	304.2	304.2	297.7	294.5	281.8	278.6	268.9
72.5°	259.3	259.3	256.2	256.2	249.8	246.6	246.6	240.1	233.7	227.3	221.0
75°	208.1	208.1	208.1	204.9	201.7	195.3	195.3	192.1	185.8	179.3	172.9
77.5°	163.3	160.1	160.1	156.8	153.7	150.5	150.5	147.3	140.9	137.7	131.3
80°	118.5	115.3	115.3	115.3	108.9	112.1	108.9	105.7	102.5	99.2	96.0
82.5°	76.9	80.1	80.1	76.9	73.7	73.7	73.7	70.4	70.4	67.2	64.0
85°	44.9	44.9	44.9	44.9	41.6	41.6	41.6	38.4	38.4	38.4	35.2
87.5°	19.2	19.2	19.2	19.2	19.2	19.2	16.1	16.1	16.1	16.1	16.1
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Cooper Lighting Solutions Photometric Lab  
 1121 Highway 74 South  
 Peachtree City, GA 30269



TEST NUMBER: P584556

CATALOG NUMBER: HCC8S40D010MW-HM82555835-81WWW

**CANDELA DISTRIBUTION (continued):**

	50°	55°	60°	65°	67.5°	70°	75°	80°	85°	90°	95°
0°	2359.8	2359.8	2359.8	2359.8	2359.8	2359.8	2359.8	2359.8	2359.8	2359.8	2359.8
2.5°	2385.5	2379.0	2375.8	2372.6	2372.6	2369.4	2366.2	2359.8	2359.8	2353.5	2350.2
5°	2398.2	2388.7	2382.3	2375.8	2372.6	2366.2	2359.8	2350.2	2347.0	2337.4	2327.8
7.5°	2401.4	2385.5	2379.0	2366.2	2359.8	2353.5	2340.6	2331.0	2318.2	2308.6	2295.7
10°	2388.7	2375.8	2359.8	2343.8	2340.6	2331.0	2311.8	2299.0	2283.0	2270.2	2251.0
12.5°	2369.4	2350.2	2334.2	2315.0	2305.4	2295.7	2276.6	2257.3	2234.9	2212.6	2193.3
15°	2337.4	2315.0	2292.5	2270.2	2257.3	2247.8	2225.3	2202.9	2180.6	2151.6	2132.5
17.5°	2289.3	2263.7	2241.4	2212.6	2199.7	2190.1	2161.3	2135.7	2106.9	2078.1	2058.8
20°	2228.5	2196.5	2170.9	2138.9	2129.3	2113.3	2084.4	2055.6	2023.6	1991.6	1969.2
22.5°	2148.5	2116.5	2087.6	2055.6	2039.7	2023.6	1994.8	1959.6	1927.6	1902.0	1879.5
25°	2055.6	2026.8	1991.6	1962.8	1943.6	1924.3	1892.3	1863.5	1834.7	1796.3	1773.8
27.5°	1953.1	1917.9	1892.3	1853.9	1834.7	1821.9	1786.7	1748.2	1722.6	1687.4	1661.8
30°	1838.0	1805.9	1777.0	1738.6	1719.4	1706.6	1674.6	1639.3	1613.8	1578.5	1552.9
32.5°	1716.2	1681.0	1645.8	1620.2	1597.8	1585.0	1549.7	1527.4	1495.4	1466.4	1437.6
35°	1585.0	1549.7	1524.2	1488.9	1476.1	1463.2	1434.4	1405.6	1376.8	1351.2	1328.8
37.5°	1444.1	1418.5	1389.7	1364.0	1354.5	1341.6	1306.4	1280.8	1258.3	1232.7	1213.6
40°	1306.4	1284.0	1264.7	1239.1	1223.1	1213.6	1187.9	1165.5	1139.9	1123.8	1104.7
42.5°	1181.6	1155.8	1136.7	1117.5	1101.5	1091.8	1069.5	1053.4	1034.2	1018.2	995.8
45°	1050.2	1037.4	1015.1	999.0	989.4	976.6	960.6	941.4	925.3	912.5	896.5
47.5°	935.0	922.1	906.2	886.9	880.5	871.0	854.9	842.2	829.3	816.5	800.5
50°	829.3	813.2	800.5	787.7	781.2	771.7	755.6	749.2	739.7	726.9	717.2
52.5°	733.3	720.4	707.6	691.6	688.4	682.0	672.4	659.6	650.0	643.6	637.1
55°	646.8	634.0	624.4	611.5	608.3	602.0	589.2	582.7	576.3	569.9	563.6
57.5°	569.9	557.2	544.3	537.9	531.6	525.1	521.9	512.3	505.9	502.7	496.3
60°	499.4	486.7	477.1	467.4	464.3	461.1	454.7	448.3	441.8	435.4	432.2
62.5°	432.2	419.5	413.0	406.6	400.2	400.2	393.9	387.5	381.0	377.8	371.4
65°	371.4	365.0	355.5	345.8	342.6	342.6	333.0	329.7	326.7	320.2	313.8
67.5°	313.8	307.4	297.7	294.5	291.4	288.2	285.0	278.6	272.2	268.9	262.5
70°	262.5	256.2	249.8	246.6	243.4	240.1	233.7	230.5	224.1	221.0	217.8
72.5°	211.3	208.1	201.7	198.5	195.3	192.1	189.0	185.8	179.3	176.1	172.9
75°	169.7	166.5	160.1	156.8	153.7	153.7	150.5	144.1	140.9	140.9	137.7
77.5°	128.0	124.8	121.6	118.5	115.3	115.3	112.1	108.9	105.7	105.7	102.5
80°	92.8	89.6	86.4	86.4	86.4	83.3	80.1	80.1	76.9	76.9	73.7
82.5°	60.8	60.8	57.6	57.6	57.6	54.4	54.4	51.3	51.3	51.3	51.3
85°	35.2	35.2	35.2	32.0	32.0	32.0	32.0	32.0	32.0	28.8	32.0
87.5°	16.1	16.1	16.1	16.1	16.1	16.1	16.1	16.1	12.9	12.9	12.9
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0



TEST NUMBER: P584556

CATALOG NUMBER: HCC8S40D010MW-HM82555835-81WWW

**CANDELA DISTRIBUTION (continued):**

	100°	105°	110°	112.5°	115°	120°	125°	130°	135°	140°	145°
0°	2359.8	2359.8	2359.8	2359.8	2359.8	2359.8	2359.8	2359.8	2359.8	2359.8	2359.8
2.5°	2347.0	2343.8	2337.4	2337.4	2331.0	2331.0	2327.8	2324.5	2321.5	2318.2	2315.0
5°	2324.5	2311.8	2305.4	2302.2	2295.7	2292.5	2283.0	2276.6	2273.4	2267.0	2260.5
7.5°	2283.0	2270.2	2257.3	2254.2	2251.0	2238.2	2228.5	2219.0	2212.6	2206.1	2199.7
10°	2234.9	2222.1	2206.1	2199.7	2193.3	2177.3	2164.5	2154.9	2142.1	2129.3	2126.1
12.5°	2177.3	2158.1	2138.9	2132.5	2122.8	2106.9	2094.0	2078.1	2068.5	2052.4	2049.2
15°	2110.1	2087.6	2071.7	2055.6	2049.2	2033.2	2010.9	1998.0	1978.9	1972.4	1956.4
17.5°	2030.0	2007.6	1985.2	1978.9	1969.2	1946.7	1924.3	1908.4	1889.1	1879.5	1870.0
20°	1946.7	1917.9	1895.6	1889.1	1876.3	1857.1	1834.7	1818.7	1802.7	1783.5	1773.8
22.5°	1850.7	1818.7	1799.5	1783.5	1780.2	1757.9	1732.3	1719.4	1706.6	1690.6	1677.8
25°	1745.0	1716.2	1693.8	1681.0	1674.6	1655.4	1636.1	1620.2	1600.9	1591.4	1575.3
27.5°	1636.1	1617.0	1588.2	1575.3	1565.8	1549.7	1527.4	1517.7	1498.4	1485.7	1476.1
30°	1530.6	1501.7	1485.7	1469.6	1460.1	1444.1	1424.9	1415.3	1399.2	1386.5	1376.8
32.5°	1415.3	1396.0	1373.6	1367.2	1354.5	1338.4	1325.5	1309.6	1296.7	1284.0	1280.8
35°	1309.6	1284.0	1261.5	1255.2	1245.6	1229.5	1223.1	1213.6	1197.5	1194.3	1181.6
37.5°	1194.3	1181.6	1155.8	1146.3	1143.1	1130.3	1117.5	1111.1	1101.5	1091.8	1088.6
40°	1085.4	1069.5	1056.6	1047.1	1040.7	1031.0	1018.2	1015.1	1008.6	995.8	992.6
42.5°	982.9	967.0	954.1	950.9	941.4	931.8	925.3	915.7	912.5	909.4	903.0
45°	883.7	874.2	861.3	858.1	854.9	842.2	835.7	829.3	822.9	819.7	813.2
47.5°	794.1	784.4	774.8	771.7	765.3	762.1	752.4	749.2	739.7	736.5	733.3
50°	707.6	701.3	694.8	691.6	685.2	682.0	675.6	669.3	662.8	659.6	656.4
52.5°	630.8	624.4	618.0	614.8	611.5	605.1	598.8	592.4	589.2	586.0	582.7
55°	557.2	550.7	547.5	544.3	541.1	537.9	528.4	525.1	521.9	518.7	512.3
57.5°	489.9	483.5	477.1	477.1	473.9	470.6	464.3	457.9	457.9	451.5	445.1
60°	429.1	422.7	416.3	413.0	409.8	403.4	400.2	397.0	393.9	390.7	384.3
62.5°	365.0	361.8	355.5	355.5	349.0	345.8	342.6	339.4	336.2	329.7	326.7
65°	310.6	307.4	301.0	297.7	297.7	294.5	288.2	285.0	281.8	281.8	278.6
67.5°	259.3	256.2	249.8	246.6	246.6	243.4	240.1	240.1	236.9	233.7	236.9
70°	214.6	208.1	208.1	204.9	204.9	201.7	198.5	198.5	198.5	201.7	201.7
72.5°	169.7	166.5	163.3	163.3	163.3	163.3	160.1	160.1	163.3	166.5	166.5
75°	134.5	131.3	131.3	131.3	128.0	128.0	131.3	131.3	134.5	134.5	134.5
77.5°	99.2	99.2	99.2	99.2	99.2	99.2	102.5	102.5	105.7	105.7	105.7
80°	73.7	73.7	73.7	73.7	73.7	76.9	76.9	76.9	76.9	76.9	80.1
82.5°	51.3	51.3	51.3	51.3	51.3	51.3	51.3	54.4	54.4	54.4	54.4
85°	28.8	32.0	32.0	32.0	32.0	32.0	32.0	32.0	32.0	32.0	32.0
87.5°	12.9	12.9	12.9	12.9	12.9	12.9	12.9	12.9	12.9	12.9	12.9
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0



Cooper Lighting Solutions Photometric Lab  
 1121 Highway 74 South  
 Peachtree City, GA 30269



TEST NUMBER: P584556

CATALOG NUMBER: HCC8S40D010MW-HM82555835-81WWW

**CANDELA DISTRIBUTION (continued):**

	150°	155°	157.5°	160°	165°	170°	175°	180°
0°	2359.8	2359.8	2359.8	2359.8	2359.8	2359.8	2359.8	2359.8
2.5°	2311.8	2311.8	2311.8	2315.0	2308.6	2308.6	2308.6	2308.6
5°	2257.3	2254.2	2251.0	2254.2	2247.8	2247.8	2244.6	2244.6
7.5°	2190.1	2186.9	2183.8	2183.8	2177.3	2177.3	2174.1	2170.9
10°	2116.5	2110.1	2113.3	2106.9	2103.7	2100.5	2097.3	2094.0
12.5°	2036.4	2030.0	2026.8	2020.4	2014.0	2010.9	2014.0	2007.6
15°	1949.9	1940.4	1937.2	1930.8	1924.3	1921.1	1921.1	1917.9
17.5°	1853.9	1847.5	1844.3	1838.0	1834.7	1828.3	1825.1	1821.9
20°	1764.3	1748.2	1751.4	1745.0	1741.8	1729.1	1729.1	1732.3
22.5°	1665.0	1655.4	1649.0	1642.6	1639.3	1633.0	1633.0	1629.8
25°	1565.8	1556.2	1552.9	1546.5	1543.3	1536.9	1533.7	1533.7
27.5°	1469.6	1456.9	1456.9	1450.5	1444.1	1440.9	1437.6	1434.4
30°	1367.2	1357.7	1354.5	1354.5	1351.2	1351.2	1341.6	1344.8
32.5°	1271.2	1264.7	1261.5	1255.2	1255.2	1252.0	1252.0	1242.4
35°	1175.1	1165.5	1168.7	1162.3	1159.1	1155.8	1159.1	1155.8
37.5°	1082.3	1075.9	1075.9	1069.5	1069.5	1066.2	1063.0	1069.5
40°	989.4	986.2	982.9	979.8	982.9	979.8	973.4	976.6
42.5°	896.5	896.5	893.3	893.3	890.1	890.1	890.1	890.1
45°	813.2	810.0	810.0	806.9	806.9	806.9	806.9	803.7
47.5°	730.1	726.9	726.9	726.9	723.6	723.6	720.4	723.6
50°	650.0	650.0	646.8	646.8	650.0	646.8	643.6	643.6
52.5°	576.3	576.3	573.1	573.1	569.9	566.8	569.9	569.9
55°	509.1	505.9	502.7	502.7	499.4	496.3	496.3	499.4
57.5°	445.1	441.8	438.6	438.6	432.2	429.1	429.1	429.1
60°	384.3	377.8	377.8	374.6	374.6	371.4	371.4	371.4
62.5°	326.7	323.4	323.4	323.4	323.4	320.2	320.2	320.2
65°	278.6	278.6	278.6	281.8	281.8	285.0	285.0	285.0
67.5°	240.1	243.4	243.4	243.4	246.6	246.6	246.6	243.4
70°	204.9	204.9	204.9	208.1	208.1	208.1	208.1	208.1
72.5°	169.7	169.7	169.7	169.7	169.7	169.7	169.7	169.7
75°	134.5	137.7	137.7	137.7	134.5	137.7	137.7	134.5
77.5°	105.7	105.7	105.7	105.7	105.7	105.7	105.7	105.7
80°	80.1	80.1	80.1	80.1	80.1	80.1	80.1	80.1
82.5°	54.4	54.4	54.4	54.4	54.4	54.4	54.4	54.4
85°	32.0	32.0	32.0	32.0	32.0	32.0	32.0	32.0
87.5°	12.9	12.9	12.9	12.9	12.9	12.9	12.9	12.9
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Classified  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Classified  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Classified  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°    - - 45°-225°    - - - - 90°-270°

Classified  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Classified  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Classified  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Classified  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report





Classified  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Classified  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)