

Classified  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269



Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: HALO COMMERCIAL

Report Number: P584742

Luminaire Tested: **HCC8W45D010SL-HM82555930-81WWBB**

Issue Date: 10/21/2021

**Test Information**

Test Method: LM-41-14  
Report Number: P584742  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2109-368-17)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 10/21/2021  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: HALO COMMERCIAL  
Catalog Number: HCC8W45D010SL-HM82555930-81WWBB  
Description: HALO COMMERCIAL 8" ROUND, NEW CONSTRUCTION FRAME, WITH 8" WALLWASH DISTRIBUTION, WHITE BAFFLE TRIM  
Light Source: (1) HIGH LUMEN LED 90CRI / 3000K CCT  
CYLINDER  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**


Lumens per Lamp: N/A  
Luminaire Lumens: 3939.8 lumens  
Efficiency: N/A  
Efficacy: 89.5 lumens/watt  
Spacing Criteria (0/90/45): 1.15 / 1.07 / 1.16  
Luminous Opening: Circular (Dia: 0.67' x H: 0')  
CIE Type: Direct

Input Watts (W): 44  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P584742  
CATALOG NUMBER: HCC8W45D010SL-HM82555930-81WWBB

### Luminous Intensity Polar Plot

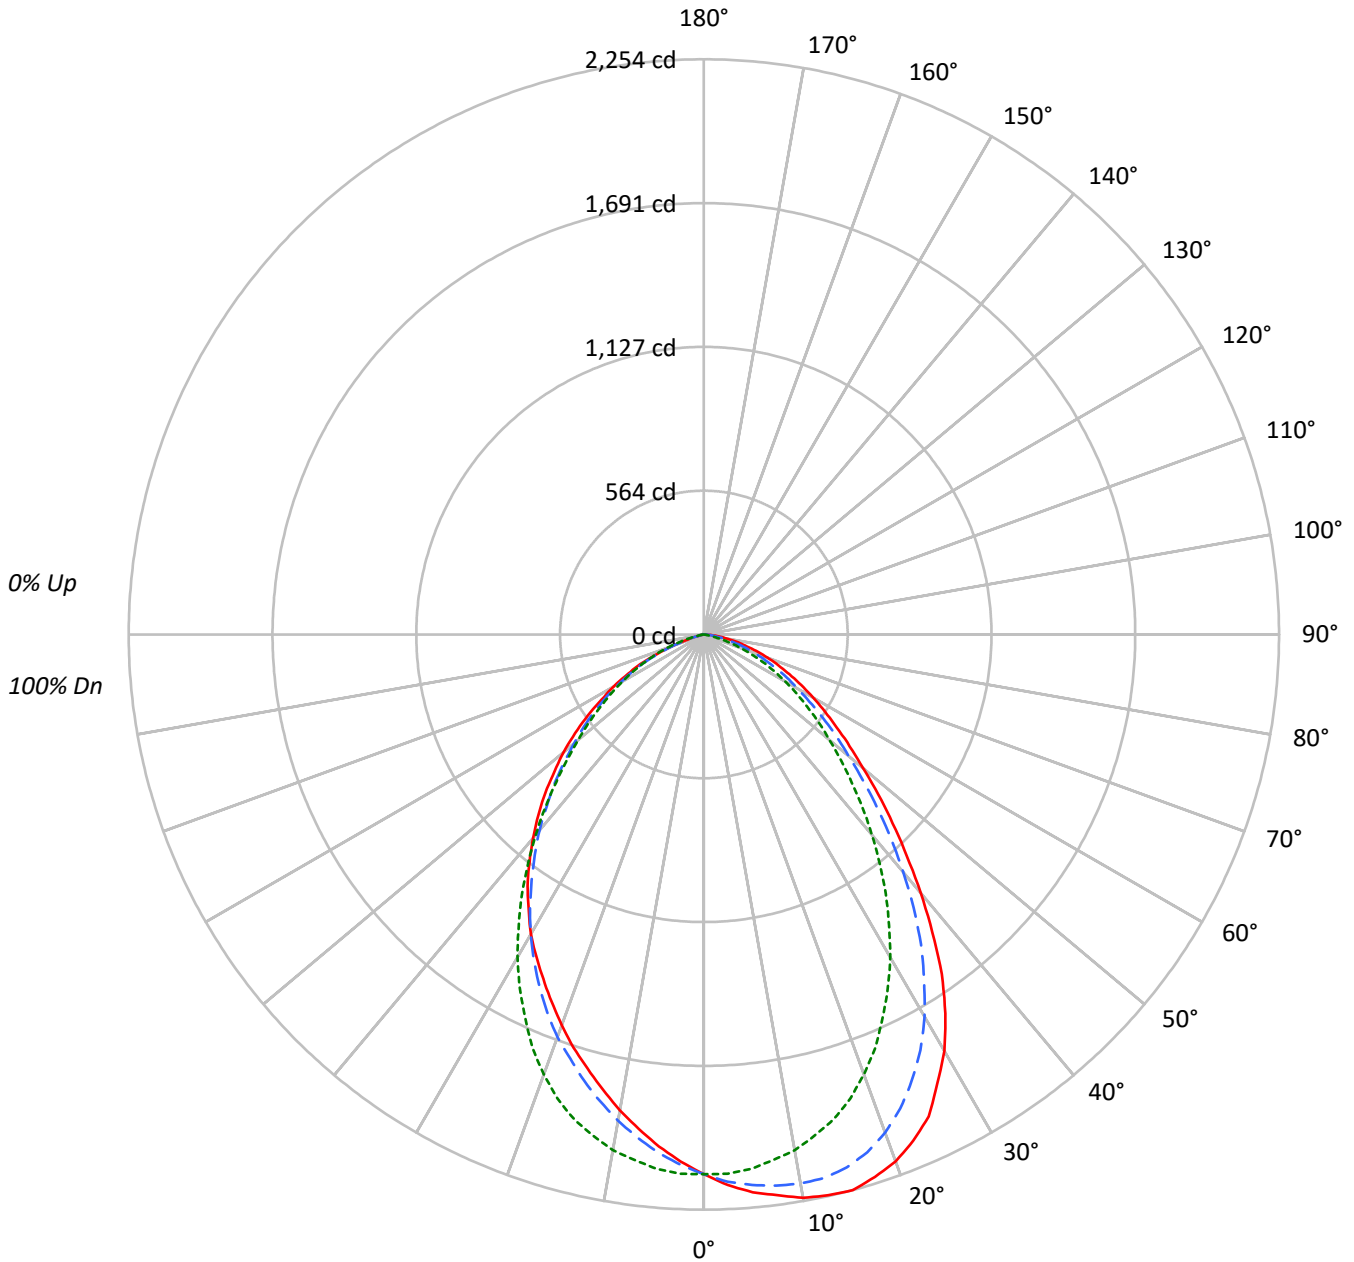

Cooper Lighting Solutions Photometric Lab  
 1121 Highway 74 South  
 Peachtree City, GA 30269



TEST NUMBER: P584742

CATALOG NUMBER: HCC8W45D010SL-HM82555930-81WWBB

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20					20					20					20					20					
RC	80					70					50					30					10					0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0		
RCR																										
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100					100			
1	111	107	104	101	108	105	102	99	101	98	96	97	95	93	93	92	90	88					88			
2	103	96	90	86	100	94	89	85	91	86	83	88	84	81	85	82	79	77					77			
3	95	86	79	74	93	85	78	73	82	76	72	79	74	71	77	73	69	67					67			
4	88	78	70	64	86	76	69	64	74	68	63	72	66	62	70	65	61	59					59			
5	82	70	63	57	80	69	62	56	67	61	56	65	60	55	64	59	55	53					53			
6	76	64	56	51	74	63	56	50	62	55	50	60	54	50	58	53	49	47					47			
7	71	59	51	45	69	58	51	45	57	50	45	55	49	45	54	49	44	43					43			
8	66	54	46	41	65	53	46	41	52	46	41	51	45	41	50	44	40	39					39			
9	62	50	43	37	61	50	42	37	48	42	37	47	41	37	46	41	37	35					35			
10	59	47	39	34	57	46	39	34	45	39	34	44	38	34	43	38	34	32					32			

**AVERAGE LUMINANCE (cd/sqm):**

	0°	90°	180°
0°	65225	65225	65225
5°	67916	65081	62338
10°	70189	64249	59299
15°	71967	62779	56218
20°	72105	60177	53430
25°	70889	56364	50665
30°	67094	52007	48293
35°	61176	46777	45346
40°	53196	41236	41872
45°	45633	35712	38328
50°	38978	30784	34425
55°	34165	26515	29918
60°	30417	22622	25156
65°	26997	18453	20073
70°	23946	13686	11396
75°	19968	7160	3396
80°	15734	2255	568
85°	11216	1132	0



TEST NUMBER: P584742  
 CATALOG NUMBER: HCC8W45D010SL-HM82555930-81WWBB

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	199.3	5.1
10°-20°	558.6	14.2
20°-30°	790.6	20.1
30°-40°	827.2	21.0
40°-50°	689.9	17.5
50°-60°	489.2	12.4
60°-70°	281.8	7.2
70°-80°	90.7	2.3
80°-90°	12.5	0.3
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1548.5	39.3
0°-40°	2375.7	60.3
0°-60°	3554.9	90.2
0°-90°	3939.8	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	3939.8	100.0

**CANDELA DISTRIBUTION:**

	0°	45°	90°	135°	180°	Flux
0°	2115	2115	2115	2115	2115	
5°	2194	2166	2102	2039	2014	211
15°	2254	2162	1966	1812	1761	634
25°	2084	1928	1657	1524	1489	951
35°	1625	1483	1243	1176	1205	1007
45°	1046	961	819	828	879	811
55°	636	569	493	518	556	574
65°	370	310	253	253	275	370
75°	168	123	60	28	28	182
85°	32	16	3	0	0	40
90°	0	0	0	0	0	

Cooper Lighting Solutions Photometric Lab  
 1121 Highway 74 South  
 Peachtree City, GA 30269



TEST NUMBER: P584742

CATALOG NUMBER: HCC8W45D010SL-HM82555930-81WWBB

**CANDELA DISTRIBUTION (FULL):**

	0°	5°	10°	15°	20°	22.5°	25°	30°	35°	40°	45°
0°	2115.2	2115.2	2115.2	2115.2	2115.2	2115.2	2115.2	2115.2	2115.2	2115.2	2115.2
2.5°	2159.4	2156.2	2153.0	2156.2	2153.0	2156.2	2153.0	2153.0	2149.9	2146.7	2146.7
5°	2194.1	2190.9	2190.9	2190.9	2187.9	2184.7	2184.7	2181.5	2175.2	2172.0	2165.7
7.5°	2216.3	2219.4	2219.4	2219.4	2213.1	2213.1	2206.8	2200.4	2194.1	2187.9	2178.4
10°	2241.6	2241.6	2238.4	2235.3	2228.9	2225.8	2222.6	2216.3	2206.8	2194.1	2184.7
12.5°	2251.1	2251.1	2247.9	2241.6	2238.4	2235.3	2232.1	2222.6	2209.9	2194.1	2181.5
15°	2254.3	2247.9	2244.8	2241.6	2235.3	2225.8	2225.8	2213.1	2197.3	2178.4	2162.5
17.5°	2228.9	2232.1	2225.8	2219.4	2209.9	2203.6	2194.1	2184.7	2165.7	2143.5	2127.7
20°	2197.3	2194.1	2190.9	2181.5	2168.9	2165.7	2156.2	2140.4	2124.5	2099.3	2077.1
22.5°	2146.7	2143.5	2137.2	2130.9	2118.3	2112.0	2102.5	2083.5	2061.3	2036.1	2010.8
25°	2083.5	2077.1	2067.6	2055.1	2045.6	2039.3	2026.6	2007.6	1982.4	1953.9	1928.5
27.5°	1982.4	1991.8	1985.5	1966.5	1957.0	1944.4	1941.2	1916.0	1893.8	1865.3	1836.9
30°	1884.3	1884.3	1874.8	1865.3	1849.6	1840.1	1827.4	1808.4	1786.2	1751.5	1729.4
32.5°	1761.0	1757.9	1745.2	1742.0	1729.4	1710.5	1707.3	1682.0	1659.8	1634.6	1606.1
35°	1625.1	1618.7	1606.1	1596.6	1590.2	1580.9	1571.4	1549.2	1527.0	1501.8	1482.8
37.5°	1470.1	1470.1	1467.0	1451.1	1444.9	1438.6	1429.1	1406.9	1394.2	1369.0	1350.0
40°	1321.5	1318.3	1309.0	1305.8	1299.4	1289.9	1283.6	1270.9	1251.9	1233.1	1214.1
42.5°	1176.2	1179.3	1166.7	1169.8	1157.2	1150.8	1147.7	1128.7	1119.2	1100.3	1084.4
45°	1046.4	1043.4	1037.0	1033.9	1027.5	1021.2	1014.9	1005.4	989.5	970.7	961.2
47.5°	926.3	916.8	916.8	913.6	910.5	897.9	894.8	885.3	875.8	856.8	844.1
50°	812.5	812.5	812.5	809.4	799.9	796.7	790.4	780.9	771.5	758.8	739.8
52.5°	720.8	720.8	720.8	717.6	705.1	701.9	698.8	686.1	673.4	663.9	651.2
55°	635.5	638.7	635.5	629.2	619.7	619.7	610.2	603.9	591.2	581.7	569.1
57.5°	562.8	562.8	556.5	553.3	547.0	543.8	537.5	531.1	515.3	505.8	490.1
60°	493.2	490.1	490.1	483.7	477.4	471.1	467.9	458.4	452.1	436.4	423.7
62.5°	430.0	430.0	423.7	423.7	411.0	411.0	407.9	398.4	388.8	373.0	366.8
65°	370.0	370.0	366.8	363.6	354.1	351.0	347.8	338.3	328.8	319.3	309.8
67.5°	316.1	316.1	309.8	306.6	300.4	297.2	290.9	284.6	275.1	265.6	256.1
70°	265.6	262.4	259.2	256.1	249.7	246.6	240.2	234.0	224.5	218.2	208.7
72.5°	215.0	215.0	211.8	205.5	202.3	199.2	196.0	189.7	180.2	170.7	164.5
75°	167.6	167.6	167.6	161.3	155.0	151.8	151.8	145.5	139.1	129.6	123.3
77.5°	129.6	126.4	123.3	123.3	116.9	113.8	110.6	107.4	98.1	94.9	88.6
80°	88.6	91.7	88.6	85.4	82.2	79.1	79.1	72.7	69.6	63.2	56.9
82.5°	60.1	56.9	56.9	53.7	53.7	50.6	50.6	44.2	41.1	37.9	34.7
85°	31.7	31.7	28.5	28.5	28.5	25.3	25.3	22.2	22.2	19.0	15.8
87.5°	9.5	9.5	9.5	9.5	9.5	9.5	9.5	9.5	6.3	6.3	6.3
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Cooper Lighting Solutions Photometric Lab  
 1121 Highway 74 South  
 Peachtree City, GA 30269



TEST NUMBER: P584742

CATALOG NUMBER: HCC8W45D010SL-HM82555930-81WWBB

**CANDELA DISTRIBUTION (continued):**

	50°	55°	60°	65°	67.5°	70°	75°	80°	85°	90°	95°
0°	2115.2	2115.2	2115.2	2115.2	2115.2	2115.2	2115.2	2115.2	2115.2	2115.2	2115.2
2.5°	2143.5	2137.2	2134.0	2134.0	2130.9	2127.7	2124.5	2121.5	2115.2	2115.2	2108.8
5°	2159.4	2153.0	2149.9	2140.4	2134.0	2134.0	2121.5	2118.3	2108.8	2102.5	2096.2
7.5°	2172.0	2159.4	2149.9	2140.4	2134.0	2127.7	2115.2	2102.5	2089.8	2077.1	2070.8
10°	2172.0	2159.4	2143.5	2127.7	2121.5	2115.2	2099.3	2080.3	2064.5	2051.9	2036.1
12.5°	2165.7	2146.7	2127.7	2115.2	2102.5	2093.0	2074.0	2055.1	2036.1	2010.8	1998.1
15°	2146.7	2121.5	2102.5	2080.3	2070.8	2055.1	2039.3	2010.8	1988.6	1966.5	1950.7
17.5°	2108.8	2077.1	2055.1	2032.9	2017.1	2007.6	1982.4	1957.0	1931.7	1906.5	1887.5
20°	2051.9	2023.4	1998.1	1969.7	1957.0	1944.4	1912.8	1887.5	1862.1	1833.8	1814.7
22.5°	1982.4	1953.9	1919.1	1897.0	1878.0	1862.1	1833.8	1805.2	1780.0	1754.7	1729.4
25°	1897.0	1868.5	1836.9	1802.1	1789.4	1773.7	1742.0	1713.6	1685.1	1656.6	1634.6
27.5°	1805.2	1767.4	1742.0	1704.1	1691.5	1675.6	1640.9	1609.2	1583.9	1561.8	1536.5
30°	1694.6	1666.1	1631.4	1596.6	1583.9	1568.2	1539.7	1511.3	1486.0	1460.6	1435.4
32.5°	1574.5	1546.0	1511.3	1486.0	1467.0	1454.3	1425.9	1400.6	1375.3	1350.0	1327.8
35°	1448.1	1416.4	1391.1	1365.8	1350.0	1334.2	1305.8	1283.6	1264.6	1242.6	1220.4
37.5°	1318.3	1296.3	1270.9	1242.6	1226.7	1214.1	1191.9	1166.7	1150.8	1131.8	1116.0
40°	1191.9	1166.7	1144.5	1119.2	1106.6	1097.1	1074.9	1055.9	1040.2	1024.4	1014.9
42.5°	1062.3	1040.2	1018.0	1002.2	992.7	983.2	967.5	945.3	935.8	920.0	910.5
45°	942.2	923.2	907.4	885.3	878.9	872.6	853.6	837.9	828.4	818.9	812.5
47.5°	828.4	815.7	796.7	784.0	774.6	768.3	755.6	743.0	733.5	727.1	720.8
50°	730.3	714.5	701.9	689.3	682.9	673.4	660.8	654.4	648.1	641.7	641.7
52.5°	638.7	622.9	610.2	600.7	594.4	588.0	578.5	575.4	569.1	569.1	566.0
55°	553.3	543.8	531.1	518.5	515.3	512.1	505.8	499.6	496.4	493.2	496.4
57.5°	480.6	471.1	458.4	448.9	445.7	442.6	439.4	433.2	430.0	430.0	430.0
60°	414.2	404.7	395.2	385.7	385.7	379.3	376.2	373.0	370.0	366.8	366.8
62.5°	354.1	344.6	335.1	328.8	325.6	322.5	316.1	313.0	309.8	309.8	306.6
65°	300.4	287.7	284.6	275.1	271.9	268.7	265.6	259.2	256.1	252.9	249.7
67.5°	246.6	240.2	230.8	224.5	221.3	218.2	215.0	208.7	205.5	202.3	196.0
70°	199.2	192.8	186.5	180.2	177.0	173.8	167.6	161.3	158.1	151.8	142.3
72.5°	155.0	148.6	142.3	136.0	132.8	129.6	123.3	116.9	110.6	104.3	98.1
75°	116.9	110.6	101.1	94.9	91.7	91.7	82.2	75.9	69.6	60.1	53.7
77.5°	82.2	72.7	69.6	63.2	60.1	53.7	47.4	41.1	34.7	31.7	25.3
80°	53.7	47.4	41.1	37.9	34.7	31.7	28.5	22.2	15.8	12.7	9.5
82.5°	31.7	28.5	25.3	22.2	19.0	15.8	12.7	12.7	9.5	6.3	3.2
85°	15.8	12.7	9.5	9.5	6.3	6.3	6.3	3.2	3.2	3.2	3.2
87.5°	6.3	3.2	3.2	3.2	3.2	3.2	3.2	0.0	0.0	0.0	0.0
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Cooper Lighting Solutions Photometric Lab  
 1121 Highway 74 South  
 Peachtree City, GA 30269



TEST NUMBER: P584742

CATALOG NUMBER: HCC8W45D010SL-HM82555930-81WWBB

**CANDELA DISTRIBUTION (continued):**

	100°	105°	110°	112.5°	115°	120°	125°	130°	135°	140°	145°
0°	2115.2	2115.2	2115.2	2115.2	2115.2	2115.2	2115.2	2115.2	2115.2	2115.2	2115.2
2.5°	2105.7	2102.5	2099.3	2096.2	2096.2	2089.8	2089.8	2086.6	2080.3	2077.1	2077.1
5°	2086.6	2077.1	2070.8	2067.6	2064.5	2055.1	2051.9	2045.6	2039.3	2032.9	2029.8
7.5°	2058.1	2042.4	2036.1	2032.9	2023.4	2013.9	2007.6	1998.1	1988.6	1979.2	1976.0
10°	2023.4	2007.6	1991.8	1985.5	1976.0	1969.7	1957.0	1944.4	1934.9	1925.4	1916.0
12.5°	1979.2	1960.2	1944.4	1938.0	1928.5	1916.0	1897.0	1890.6	1874.8	1868.5	1855.8
15°	1928.5	1906.5	1890.6	1881.1	1871.6	1852.8	1840.1	1827.4	1811.6	1805.2	1792.6
17.5°	1865.3	1840.1	1824.2	1814.7	1808.4	1792.6	1773.7	1757.9	1742.0	1735.7	1726.2
20°	1789.4	1773.7	1751.5	1742.0	1735.7	1716.8	1697.8	1691.5	1678.8	1666.1	1656.6
22.5°	1704.1	1688.3	1666.1	1656.6	1653.5	1637.7	1621.9	1612.4	1602.9	1593.4	1583.9
25°	1615.6	1596.6	1577.7	1571.4	1565.0	1552.3	1539.7	1533.3	1523.8	1517.5	1511.3
27.5°	1520.7	1501.8	1486.0	1476.5	1470.1	1460.6	1454.3	1448.1	1441.7	1435.4	1432.2
30°	1419.6	1400.6	1387.9	1381.7	1375.3	1372.2	1362.7	1359.5	1356.3	1350.0	1353.2
32.5°	1318.3	1302.6	1289.9	1280.4	1280.4	1274.1	1270.9	1270.9	1267.8	1267.8	1267.8
35°	1207.7	1198.2	1188.7	1185.6	1182.4	1179.3	1176.2	1179.3	1176.2	1179.3	1182.4
37.5°	1106.6	1097.1	1090.8	1087.6	1084.4	1087.6	1084.4	1084.4	1087.6	1093.9	1097.1
40°	1002.2	995.9	989.5	992.7	989.5	989.5	989.5	999.0	1002.2	1005.4	1008.5
42.5°	904.3	897.9	894.8	894.8	897.9	894.8	901.1	904.3	910.5	920.0	926.3
45°	809.4	806.2	806.2	809.4	806.2	812.5	812.5	818.9	828.4	834.7	841.0
47.5°	720.8	720.8	720.8	724.0	724.0	727.1	733.5	736.6	743.0	749.3	755.6
50°	638.7	641.7	644.9	644.9	644.9	651.2	657.6	660.8	663.9	667.1	676.6
52.5°	566.0	569.1	569.1	572.3	575.4	578.5	581.7	588.0	591.2	597.5	600.7
55°	496.4	496.4	502.7	505.8	505.8	505.8	512.1	512.1	518.5	521.6	528.0
57.5°	430.0	433.2	433.2	436.4	436.4	439.4	442.6	445.7	448.9	452.1	455.2
60°	366.8	366.8	366.8	370.0	373.0	376.2	373.0	379.3	379.3	385.7	388.8
62.5°	306.6	309.8	309.8	309.8	309.8	309.8	309.8	313.0	316.1	319.3	322.5
65°	249.7	249.7	249.7	246.6	249.7	246.6	249.7	252.9	252.9	256.1	259.2
67.5°	192.8	192.8	186.5	186.5	189.7	189.7	189.7	189.7	186.5	192.8	192.8
70°	139.1	136.0	132.8	129.6	129.6	126.4	126.4	123.3	123.3	123.3	123.3
72.5°	91.7	85.4	79.1	75.9	72.7	72.7	66.4	63.2	66.4	66.4	66.4
75°	47.4	41.1	37.9	34.7	31.7	31.7	28.5	28.5	28.5	28.5	28.5
77.5°	19.0	15.8	12.7	12.7	9.5	9.5	9.5	9.5	9.5	9.5	9.5
80°	6.3	6.3	3.2	3.2	3.2	3.2	3.2	3.2	3.2	3.2	3.2
82.5°	3.2	3.2	3.2	3.2	3.2	3.2	3.2	3.2	3.2	3.2	3.2
85°	3.2	0.0	0.0	3.2	0.0	3.2	3.2	3.2	0.0	0.0	0.0
87.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0



Cooper Lighting Solutions Photometric Lab  
 1121 Highway 74 South  
 Peachtree City, GA 30269



TEST NUMBER: P584742

CATALOG NUMBER: HCC8W45D010SL-HM82555930-81WWBB

**CANDELA DISTRIBUTION (continued):**

	150°	155°	157.5°	160°	165°	170°	175°	180°
0°	2115.2	2115.2	2115.2	2115.2	2115.2	2115.2	2115.2	2115.2
2.5°	2074.0	2074.0	2070.8	2074.0	2067.6	2070.8	2067.6	2067.6
5°	2026.6	2020.3	2020.3	2020.3	2017.1	2017.1	2013.9	2013.9
7.5°	1969.7	1966.5	1963.4	1960.2	1957.0	1953.9	1953.9	1953.9
10°	1912.8	1906.5	1906.5	1903.3	1897.0	1893.8	1893.8	1893.8
12.5°	1846.4	1843.3	1840.1	1840.1	1827.4	1830.6	1827.4	1827.4
15°	1783.2	1780.0	1780.0	1770.5	1764.2	1764.2	1764.2	1761.0
17.5°	1716.8	1713.6	1710.5	1704.1	1697.8	1697.8	1694.6	1697.8
20°	1647.2	1644.1	1637.7	1637.7	1634.6	1631.4	1625.1	1628.2
22.5°	1577.7	1571.4	1568.2	1568.2	1565.0	1565.0	1558.7	1558.7
25°	1505.0	1501.8	1498.6	1501.8	1495.5	1495.5	1489.1	1489.1
27.5°	1429.1	1425.9	1425.9	1425.9	1422.7	1425.9	1422.7	1422.7
30°	1353.2	1353.2	1350.0	1350.0	1353.2	1350.0	1353.2	1356.3
32.5°	1270.9	1270.9	1274.1	1274.1	1277.3	1277.3	1277.3	1277.3
35°	1185.6	1191.9	1191.9	1195.1	1198.2	1201.4	1201.4	1204.6
37.5°	1106.6	1109.8	1112.8	1116.0	1122.3	1122.3	1122.3	1122.3
40°	1021.2	1024.4	1030.7	1027.5	1040.2	1043.4	1040.2	1040.2
42.5°	932.7	939.0	942.2	948.5	951.7	958.0	961.2	961.2
45°	850.4	853.6	859.9	866.3	869.4	878.9	878.9	878.9
47.5°	765.1	771.5	774.6	780.9	784.0	793.5	796.7	793.5
50°	682.9	689.3	695.6	695.6	705.1	708.1	714.5	717.6
52.5°	603.9	607.0	613.4	616.5	622.9	629.2	632.4	635.5
55°	528.0	531.1	537.5	537.5	547.0	550.1	556.5	556.5
57.5°	458.4	461.6	467.9	464.7	471.1	477.4	477.4	474.2
60°	392.0	392.0	392.0	398.4	401.5	404.7	407.9	407.9
62.5°	322.5	328.8	332.0	332.0	335.1	338.3	338.3	335.1
65°	259.2	265.6	268.7	268.7	271.9	271.9	271.9	275.1
67.5°	196.0	196.0	196.0	199.2	196.0	196.0	196.0	196.0
70°	123.3	123.3	123.3	123.3	120.1	123.3	123.3	126.4
72.5°	66.4	66.4	66.4	66.4	66.4	66.4	66.4	66.4
75°	28.5	28.5	28.5	31.7	28.5	28.5	28.5	28.5
77.5°	12.7	9.5	12.7	12.7	9.5	9.5	9.5	9.5
80°	3.2	3.2	3.2	3.2	3.2	3.2	3.2	3.2
82.5°	3.2	3.2	3.2	3.2	3.2	3.2	3.2	3.2
85°	0.0	3.2	0.0	0.0	0.0	0.0	0.0	0.0
87.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Classified  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Classified  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Classified  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°    - - 45°-225°    - - - - 90°-270°

Classified  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Classified  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Classified  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Classified  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report





Classified  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Classified  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)