

Classified  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269



Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: HALO COMMERCIAL

Report Number: P584922

Luminaire Tested: **HCC8W55D010MW-HM82555827-81RWWC**

Issue Date: 10/21/2021

**Test Information**

Test Method: LM-41-14  
Report Number: P584922  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2109-368-14)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 10/21/2021  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: HALO COMMERCIAL  
Catalog Number: HCC8W55D010MW-HM82555827-81RWWC  
Description: HALO COMMERCIAL 8" ROUND, NEW CONSTRUCTION FRAME, WITH 8" WALLWASH DISTRIBUTION, SPECULAR TRIM  
Light Source: (1) HIGH LUMEN LED 80CRI / 2700K CCT  
CYLINDER  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**


Lumens per Lamp: N/A  
Luminaire Lumens: 5170.6 lumens  
Efficiency: N/A  
Efficacy: 99.4 lumens/watt  
Spacing Criteria (0/90/45): 1.15 / 1.08 / 1.17  
Luminous Opening: Circular (Dia: 0.67' x H: 0')  
CIE Type: Direct

Input Watts (W): 52  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P584922  
CATALOG NUMBER: HCC8W55D010MW-HM82555827-81RWWC

### Luminous Intensity Polar Plot

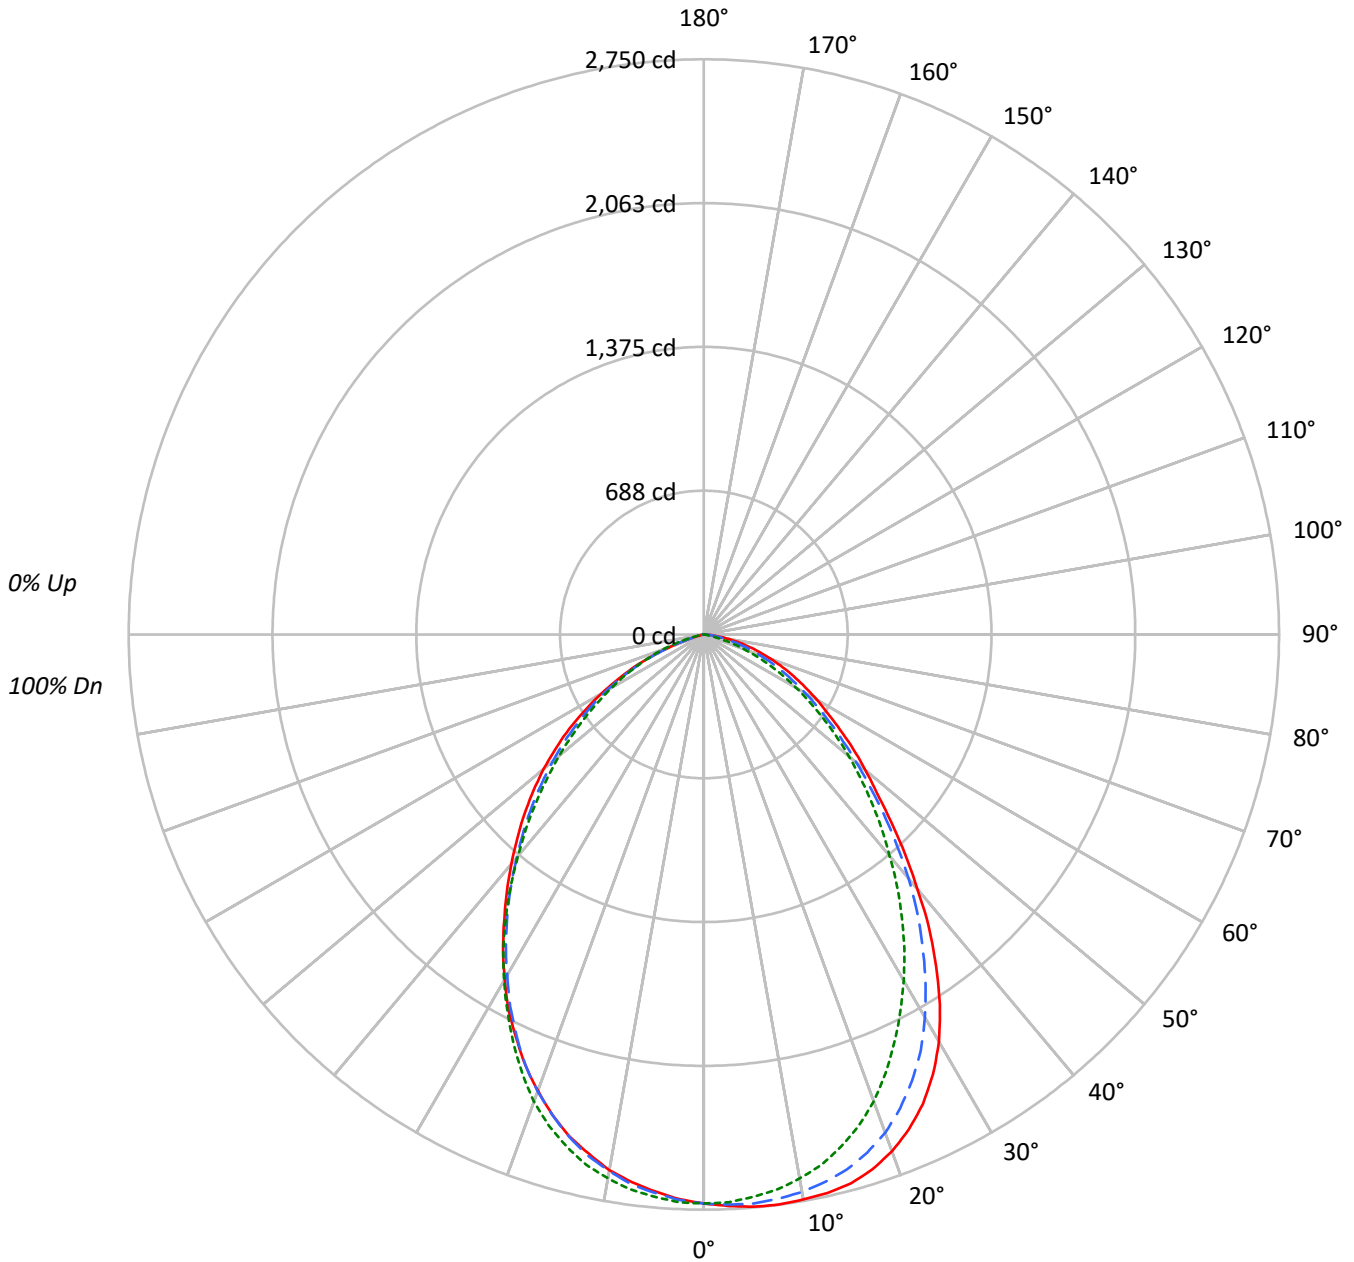

Cooper Lighting Solutions Photometric Lab  
 1121 Highway 74 South  
 Peachtree City, GA 30269



TEST NUMBER: P584922

CATALOG NUMBER: HCC8W55D010MW-HM82555827-81RWWC

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20					20					20					20					20					
RC	80					70					50					30					10					0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0		
RCR																										
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100					100			
1	111	107	104	101	108	105	102	99	101	98	96	97	95	93	93	92	90	88					88			
2	103	96	90	85	100	94	89	84	91	86	82	87	84	81	84	82	79	77					77			
3	95	86	79	73	93	84	78	73	82	76	72	79	74	70	76	73	69	67					67			
4	88	77	70	64	86	76	69	64	74	68	63	72	66	62	69	65	61	59					59			
5	81	70	62	56	80	69	62	56	67	61	56	65	59	55	63	58	54	52					52			
6	76	64	56	50	74	63	55	50	61	55	50	60	54	49	58	53	49	47					47			
7	71	59	51	45	69	58	50	45	56	50	45	55	49	44	54	48	44	42					42			
8	66	54	46	41	65	53	46	41	52	45	40	51	45	40	50	44	40	38					38			
9	62	50	42	37	61	49	42	37	48	42	37	47	41	37	46	41	37	35					35			
10	58	46	39	34	57	46	39	34	45	38	34	44	38	34	43	38	34	32					32			

**AVERAGE LUMINANCE (cd/sqm):**

	0°	90°	180°
0°	83893	83893	83893
5°	85000	83539	82750
10°	85870	82683	81433
15°	86735	80937	79312
20°	86294	77953	76164
25°	84281	73285	72294
30°	80058	68030	67770
35°	72879	62075	62621
40°	63891	55563	57607
45°	55122	49418	52902
50°	48270	43387	47920
55°	42762	37294	42176
60°	38533	31361	34950
65°	34717	25173	26764
70°	30456	18347	14741
75°	25973	9519	3896
80°	19995	2575	639
85°	12843	0	0



TEST NUMBER: P584922  
 CATALOG NUMBER: HCC8W55D010MW-HM82555827-81RWWC

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	256.7	5.0
10°-20°	721.6	14.0
20°-30°	1024.2	19.8
30°-40°	1078.1	20.9
40°-50°	917.1	17.7
50°-60°	662.7	12.8
60°-70°	376.9	7.3
70°-80°	118.8	2.3
80°-90°	14.4	0.3
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	2002.4	38.7
0°-40°	3080.5	59.6
0°-60°	4660.4	90.1
0°-90°	5170.6	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	5170.6	100.0

**CANDELA DISTRIBUTION:**

	0°	45°	90°	135°	180°	Flux
0°	2721	2721	2721	2721	2721	
5°	2746	2732	2699	2681	2673	262
15°	2717	2648	2535	2488	2484	765
25°	2477	2354	2154	2118	2125	1135
35°	1936	1823	1649	1638	1664	1205
45°	1264	1217	1133	1162	1213	983
55°	795	737	694	734	784	717
65°	476	410	345	341	367	472
75°	218	167	80	36	33	234
85°	36	22	0	0	0	47
90°	0	0	0	0	0	

Cooper Lighting Solutions Photometric Lab  
 1121 Highway 74 South  
 Peachtree City, GA 30269



TEST NUMBER: P584922

CATALOG NUMBER: HCC8W55D010MW-HM82555827-81RWWC

**CANDELA DISTRIBUTION (FULL):**

	0°	5°	10°	15°	20°	22.5°	25°	30°	35°	40°	45°
0°	2720.6	2720.6	2720.6	2720.6	2720.6	2720.6	2720.6	2720.6	2720.6	2720.6	2720.6
2.5°	2735.1	2738.7	2731.5	2731.5	2738.7	2731.5	2735.1	2735.1	2731.5	2731.5	2727.8
5°	2746.0	2742.4	2742.4	2742.4	2746.0	2738.7	2735.1	2738.7	2731.5	2731.5	2731.5
7.5°	2749.6	2749.6	2746.0	2742.4	2742.4	2742.4	2738.7	2735.1	2731.5	2724.2	2720.6
10°	2742.4	2742.4	2746.0	2738.7	2738.7	2731.5	2731.5	2724.2	2724.2	2716.9	2706.0
12.5°	2735.1	2731.5	2731.5	2724.2	2724.2	2716.9	2716.9	2706.0	2702.4	2691.5	2680.6
15°	2716.9	2713.3	2706.0	2702.4	2698.8	2695.1	2687.9	2684.2	2673.3	2658.8	2647.9
17.5°	2680.6	2677.0	2673.3	2666.1	2658.8	2655.2	2651.5	2640.6	2626.1	2615.2	2597.0
20°	2629.7	2626.1	2626.1	2615.2	2611.6	2600.7	2597.0	2582.5	2571.6	2549.8	2535.3
22.5°	2560.7	2564.3	2557.1	2549.8	2542.5	2531.6	2524.4	2509.8	2491.7	2469.9	2451.7
25°	2477.1	2480.8	2473.5	2466.2	2455.3	2448.1	2440.8	2419.0	2401.0	2375.5	2353.7
27.5°	2371.9	2371.9	2371.9	2364.6	2346.5	2342.8	2335.6	2313.8	2288.3	2266.5	2244.7
30°	2248.4	2244.7	2244.7	2233.8	2226.6	2212.0	2201.1	2183.0	2164.8	2139.4	2113.9
32.5°	2099.4	2103.0	2092.1	2084.9	2074.0	2074.0	2059.4	2044.9	2023.1	1997.7	1972.2
35°	1936.0	1939.7	1932.4	1928.8	1910.6	1907.0	1903.3	1885.2	1870.6	1852.5	1823.4
37.5°	1768.9	1765.3	1761.6	1761.6	1750.7	1743.5	1736.2	1725.3	1703.5	1689.0	1674.4
40°	1587.2	1587.2	1587.2	1583.6	1580.0	1572.7	1569.1	1561.8	1547.3	1532.7	1522.0
42.5°	1423.9	1423.9	1420.2	1416.6	1409.3	1413.0	1405.7	1398.4	1383.9	1373.0	1365.7
45°	1264.0	1264.0	1264.0	1267.6	1260.4	1249.5	1249.5	1242.2	1234.9	1227.7	1216.8
47.5°	1122.3	1133.2	1125.9	1122.3	1125.9	1111.4	1111.4	1104.1	1096.9	1089.7	1075.2
50°	1006.2	1006.2	1006.2	998.9	995.3	995.3	984.4	977.1	973.5	966.2	951.7
52.5°	900.8	893.5	893.5	889.9	886.3	879.0	879.0	871.7	857.2	849.9	839.0
55°	795.4	795.4	791.8	788.2	784.5	780.9	777.3	766.4	759.1	748.2	737.3
57.5°	701.0	708.2	704.6	697.3	690.1	690.1	682.8	675.5	664.6	653.9	643.0
60°	624.8	621.2	621.2	617.5	610.3	606.6	603.0	592.1	581.2	570.3	559.4
62.5°	544.9	544.9	544.9	537.6	530.3	526.7	523.1	515.8	501.3	490.4	483.1
65°	475.8	472.2	468.6	464.9	461.3	454.0	450.4	443.1	432.2	421.3	410.4
67.5°	406.8	403.2	403.2	399.5	388.6	385.0	385.0	374.1	363.2	352.3	341.4
70°	337.8	337.8	337.8	330.5	326.9	323.2	319.6	312.3	301.4	290.5	279.6
72.5°	279.6	276.0	276.0	272.4	261.5	257.8	254.2	246.9	236.0	228.8	221.5
75°	218.0	218.0	214.4	210.7	207.1	203.5	199.8	192.6	181.7	170.8	167.1
77.5°	167.1	163.5	163.5	159.9	152.6	149.0	149.0	141.7	130.8	123.5	116.3
80°	112.6	116.3	112.6	109.0	105.4	101.7	98.1	94.5	87.2	79.9	72.7
82.5°	69.0	72.7	69.0	69.0	65.4	61.8	61.8	54.5	50.9	47.2	43.6
85°	36.3	36.3	36.3	36.3	32.7	32.7	32.7	29.1	25.4	21.8	21.8
87.5°	10.9	14.5	10.9	10.9	10.9	10.9	10.9	10.9	7.3	7.3	7.3
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0



TEST NUMBER: P584922

CATALOG NUMBER: HCC8W55D010MW-HM82555827-81RWWC

**CANDELA DISTRIBUTION (continued):**

	50°	55°	60°	65°	67.5°	70°	75°	80°	85°	90°	95°
0°	2720.6	2720.6	2720.6	2720.6	2720.6	2720.6	2720.6	2720.6	2720.6	2720.6	2720.6
2.5°	2731.5	2727.8	2724.2	2724.2	2724.2	2724.2	2724.2	2720.6	2716.9	2716.9	2716.9
5°	2724.2	2724.2	2724.2	2720.6	2716.9	2716.9	2709.7	2706.0	2702.4	2698.8	2695.1
7.5°	2716.9	2709.7	2706.0	2702.4	2698.8	2698.8	2691.5	2684.2	2684.2	2677.0	2669.7
10°	2695.1	2691.5	2684.2	2677.0	2673.3	2669.7	2662.4	2651.5	2647.9	2640.6	2633.4
12.5°	2669.7	2662.4	2655.2	2640.6	2637.0	2633.4	2618.8	2607.9	2600.7	2597.0	2578.9
15°	2637.0	2622.5	2611.6	2593.4	2589.8	2582.5	2571.6	2560.7	2546.2	2535.3	2528.0
17.5°	2578.9	2564.3	2546.2	2528.0	2520.7	2520.7	2502.6	2488.0	2469.9	2462.6	2448.1
20°	2509.8	2491.7	2477.1	2455.3	2444.4	2433.5	2422.6	2401.0	2386.4	2375.5	2357.4
22.5°	2429.9	2404.6	2386.4	2364.6	2346.5	2335.6	2317.4	2299.2	2281.1	2270.2	2255.6
25°	2328.3	2306.5	2277.4	2255.6	2244.7	2230.2	2208.4	2190.2	2172.1	2153.9	2146.6
27.5°	2215.7	2186.6	2161.2	2135.7	2124.8	2113.9	2088.5	2066.7	2052.2	2034.0	2026.7
30°	2092.1	2063.1	2034.0	2012.2	2001.3	1983.1	1968.7	1943.3	1925.1	1910.6	1892.4
32.5°	1950.6	1928.8	1903.3	1870.6	1863.4	1848.8	1827.0	1816.1	1794.3	1783.4	1768.9
35°	1798.0	1783.4	1758.0	1732.6	1721.7	1714.4	1696.2	1674.4	1659.9	1649.0	1641.7
37.5°	1652.6	1634.5	1609.0	1590.9	1583.6	1572.7	1550.9	1540.0	1525.6	1518.3	1503.8
40°	1496.5	1478.4	1460.2	1449.3	1438.4	1431.1	1416.6	1405.7	1391.2	1380.3	1376.6
42.5°	1343.9	1333.0	1318.5	1304.0	1300.3	1289.4	1282.2	1271.3	1260.4	1256.7	1245.8
45°	1205.9	1195.0	1180.4	1165.9	1162.3	1155.0	1151.4	1140.5	1133.2	1133.2	1133.2
47.5°	1067.9	1057.0	1042.5	1035.2	1038.9	1024.3	1024.3	1020.7	1013.4	1013.4	1017.1
50°	944.4	929.9	926.2	919.0	911.7	904.4	908.1	897.2	897.2	904.4	900.8
52.5°	828.1	813.6	810.0	802.7	799.1	799.1	795.4	795.4	791.8	795.4	795.4
55°	722.8	711.9	704.6	697.3	693.7	693.7	693.7	690.1	686.4	693.7	697.3
57.5°	628.4	624.8	617.5	606.6	603.0	599.4	595.7	595.7	595.7	595.7	599.4
60°	544.9	537.6	530.3	519.4	519.4	515.8	512.2	508.5	508.5	508.5	508.5
62.5°	472.2	461.3	450.4	443.1	439.5	435.9	432.2	425.0	425.0	425.0	425.0
65°	399.5	388.6	381.4	374.1	366.8	366.8	359.6	355.9	348.7	345.0	337.8
67.5°	330.5	323.2	316.0	305.1	301.4	297.8	290.5	286.9	276.0	272.4	268.7
70°	268.7	257.8	250.6	243.3	239.7	232.4	225.1	218.0	210.7	203.5	196.2
72.5°	210.7	199.8	192.6	185.3	178.0	178.0	167.1	159.9	149.0	141.7	130.8
75°	156.2	145.3	138.1	127.2	123.5	119.9	109.0	101.7	90.8	79.9	72.7
77.5°	105.4	98.1	90.8	79.9	72.7	72.7	61.8	54.5	47.2	36.3	32.7
80°	65.4	58.1	50.9	43.6	43.6	36.3	32.7	25.4	18.2	14.5	10.9
82.5°	36.3	32.7	29.1	21.8	21.8	18.2	14.5	10.9	7.3	3.6	3.6
85°	18.2	14.5	10.9	10.9	7.3	7.3	7.3	3.6	3.6	0.0	0.0
87.5°	7.3	3.6	3.6	3.6	3.6	3.6	0.0	0.0	0.0	0.0	0.0
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Cooper Lighting Solutions Photometric Lab  
 1121 Highway 74 South  
 Peachtree City, GA 30269



TEST NUMBER: P584922

CATALOG NUMBER: HCC8W55D010MW-HM82555827-81RWWC

**CANDELA DISTRIBUTION (continued):**

	100°	105°	110°	112.5°	115°	120°	125°	130°	135°	140°	145°
0°	2720.6	2720.6	2720.6	2720.6	2720.6	2720.6	2720.6	2720.6	2720.6	2720.6	2720.6
2.5°	2713.3	2713.3	2709.7	2709.7	2709.7	2706.0	2709.7	2706.0	2706.0	2706.0	2709.7
5°	2698.8	2691.5	2691.5	2687.9	2687.9	2684.2	2687.9	2684.2	2680.6	2677.0	2680.6
7.5°	2669.7	2662.4	2658.8	2655.2	2655.2	2655.2	2651.5	2647.9	2651.5	2640.6	2647.9
10°	2629.7	2626.1	2618.8	2615.2	2611.6	2615.2	2611.6	2604.3	2604.3	2604.3	2600.7
12.5°	2578.9	2571.6	2568.0	2564.3	2557.1	2557.1	2560.7	2553.4	2553.4	2546.2	2546.2
15°	2517.1	2509.8	2502.6	2502.6	2495.3	2495.3	2491.7	2491.7	2488.0	2484.4	2484.4
17.5°	2440.8	2429.9	2422.6	2426.3	2422.6	2419.0	2419.0	2411.7	2408.1	2411.7	2411.7
20°	2350.1	2342.8	2335.6	2339.2	2331.9	2328.3	2331.9	2321.0	2324.7	2324.7	2324.7
22.5°	2248.4	2244.7	2233.8	2233.8	2226.6	2222.9	2226.6	2226.6	2230.2	2226.6	2226.6
25°	2135.7	2128.5	2121.2	2121.2	2117.6	2113.9	2117.6	2121.2	2117.6	2121.2	2121.2
27.5°	2015.8	2004.9	2004.9	1997.7	1997.7	2001.3	1997.7	2001.3	2004.9	2004.9	2012.2
30°	1885.2	1881.5	1877.9	1874.3	1874.3	1877.9	1877.9	1877.9	1881.5	1888.8	1888.8
32.5°	1761.6	1754.4	1747.1	1747.1	1754.4	1750.7	1754.4	1754.4	1761.6	1761.6	1768.9
35°	1627.2	1627.2	1619.9	1623.6	1623.6	1623.6	1623.6	1630.8	1638.1	1641.7	1649.0
37.5°	1503.8	1492.9	1496.5	1496.5	1500.2	1496.5	1507.4	1507.4	1514.7	1514.7	1522.0
40°	1369.4	1369.4	1373.0	1369.4	1373.0	1373.0	1380.3	1387.5	1391.2	1398.4	1402.1
42.5°	1242.2	1249.5	1242.2	1245.8	1249.5	1253.1	1256.7	1260.4	1274.9	1282.2	1293.1
45°	1125.9	1129.6	1133.2	1136.8	1133.2	1140.5	1144.1	1151.4	1162.3	1165.9	1169.5
47.5°	1013.4	1017.1	1020.7	1024.3	1024.3	1031.6	1035.2	1042.5	1049.8	1053.4	1057.0
50°	904.4	911.7	915.3	915.3	919.0	926.2	933.5	933.5	940.8	951.7	955.3
52.5°	806.3	806.3	813.6	817.2	820.9	820.9	831.8	835.4	839.0	846.3	853.6
55°	697.3	708.2	711.9	711.9	719.1	726.4	730.0	733.7	733.7	748.2	748.2
57.5°	603.0	606.6	613.9	613.9	613.9	624.8	624.8	632.1	635.7	639.3	646.6
60°	508.5	515.8	515.8	519.4	515.8	523.1	526.7	534.0	537.6	541.2	544.9
62.5°	421.3	421.3	425.0	425.0	425.0	425.0	432.2	432.2	439.5	443.1	446.8
65°	337.8	337.8	337.8	337.8	337.8	337.8	337.8	337.8	341.4	341.4	348.7
67.5°	261.5	257.8	250.6	254.2	250.6	250.6	246.9	246.9	250.6	250.6	257.8
70°	188.9	185.3	178.0	178.0	174.4	170.8	167.1	163.5	159.9	159.9	159.9
72.5°	123.5	116.3	105.4	101.7	101.7	94.5	87.2	83.6	83.6	83.6	83.6
75°	61.8	54.5	47.2	43.6	43.6	36.3	40.0	36.3	36.3	36.3	36.3
77.5°	25.4	18.2	14.5	14.5	14.5	10.9	10.9	10.9	10.9	10.9	10.9
80°	7.3	3.6	3.6	3.6	3.6	3.6	3.6	3.6	3.6	3.6	3.6
82.5°	3.6	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
85°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
87.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0



Cooper Lighting Solutions Photometric Lab  
 1121 Highway 74 South  
 Peachtree City, GA 30269



TEST NUMBER: P584922

CATALOG NUMBER: HCC8W55D010MW-HM82555827-81RWWC

**CANDELA DISTRIBUTION (continued):**

	150°	155°	157.5°	160°	165°	170°	175°	180°
0°	2720.6	2720.6	2720.6	2720.6	2720.6	2720.6	2720.6	2720.6
2.5°	2706.0	2706.0	2698.8	2702.4	2702.4	2702.4	2702.4	2702.4
5°	2673.3	2677.0	2673.3	2677.0	2677.0	2673.3	2673.3	2673.3
7.5°	2640.6	2644.3	2640.6	2644.3	2644.3	2644.3	2640.6	2640.6
10°	2600.7	2600.7	2600.7	2600.7	2600.7	2597.0	2600.7	2600.7
12.5°	2546.2	2546.2	2546.2	2549.8	2549.8	2546.2	2546.2	2542.5
15°	2488.0	2480.8	2484.4	2488.0	2484.4	2484.4	2484.4	2484.4
17.5°	2408.1	2411.7	2408.1	2408.1	2408.1	2408.1	2411.7	2408.1
20°	2324.7	2324.7	2328.3	2324.7	2324.7	2324.7	2324.7	2321.0
22.5°	2230.2	2226.6	2226.6	2230.2	2230.2	2226.6	2230.2	2230.2
25°	2124.8	2128.5	2124.8	2124.8	2128.5	2128.5	2128.5	2124.8
27.5°	2012.2	2015.8	2019.5	2015.8	2015.8	2015.8	2019.5	2023.1
30°	1896.1	1903.3	1896.1	1896.1	1903.3	1899.7	1903.3	1903.3
32.5°	1772.5	1783.4	1776.2	1783.4	1783.4	1787.1	1783.4	1787.1
35°	1649.0	1659.9	1659.9	1659.9	1663.5	1667.2	1667.2	1663.5
37.5°	1532.7	1536.4	1536.4	1543.6	1547.3	1550.9	1550.9	1547.3
40°	1413.0	1420.2	1423.9	1423.9	1423.9	1431.1	1438.4	1431.1
42.5°	1296.7	1300.3	1304.0	1304.0	1311.2	1314.9	1318.5	1318.5
45°	1184.1	1191.3	1195.0	1198.6	1202.2	1209.5	1205.9	1213.1
47.5°	1067.9	1078.8	1082.5	1086.1	1093.4	1096.9	1100.5	1104.1
50°	962.6	969.8	969.8	977.1	988.0	988.0	995.3	998.9
52.5°	857.2	860.8	864.5	868.1	875.4	882.6	882.6	889.9
55°	755.5	759.1	759.1	762.7	766.4	780.9	784.5	784.5
57.5°	650.2	650.2	657.4	661.0	664.6	671.9	671.9	671.9
60°	548.5	552.1	552.1	555.8	559.4	566.7	570.3	566.7
62.5°	446.8	450.4	450.4	454.0	461.3	464.9	461.3	461.3
65°	352.3	355.9	355.9	359.6	366.8	366.8	363.2	366.8
67.5°	257.8	257.8	257.8	257.8	257.8	257.8	257.8	257.8
70°	163.5	159.9	156.2	159.9	159.9	159.9	156.2	163.5
72.5°	79.9	83.6	83.6	83.6	83.6	83.6	83.6	79.9
75°	36.3	36.3	32.7	32.7	32.7	36.3	36.3	32.7
77.5°	10.9	10.9	10.9	10.9	10.9	10.9	10.9	10.9
80°	3.6	3.6	3.6	3.6	3.6	3.6	3.6	3.6
82.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
85°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
87.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Classified  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Classified  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Classified  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°    - - 45°-225°    - - - - 90°-270°

Classified  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Classified  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Classified  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Classified  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report





Classified  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Classified  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)